
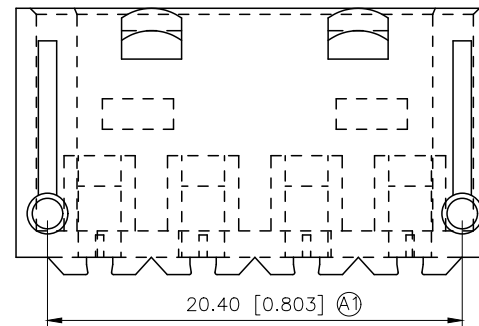
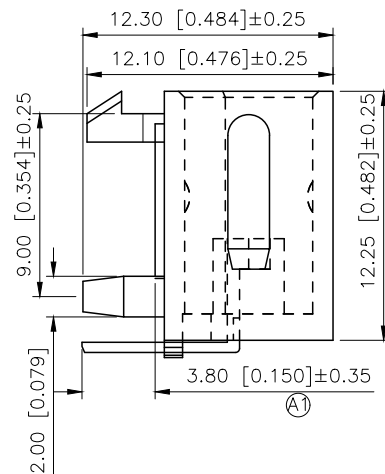
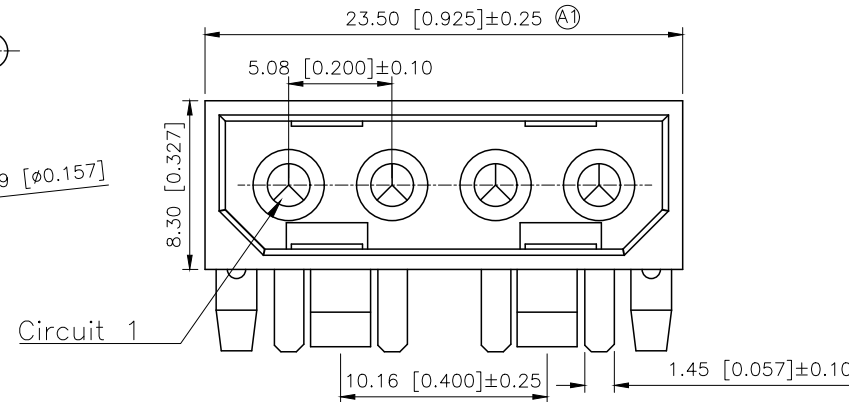


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	①X3	尺寸变更, 图面升级整理图面	2025.05.15	阿树

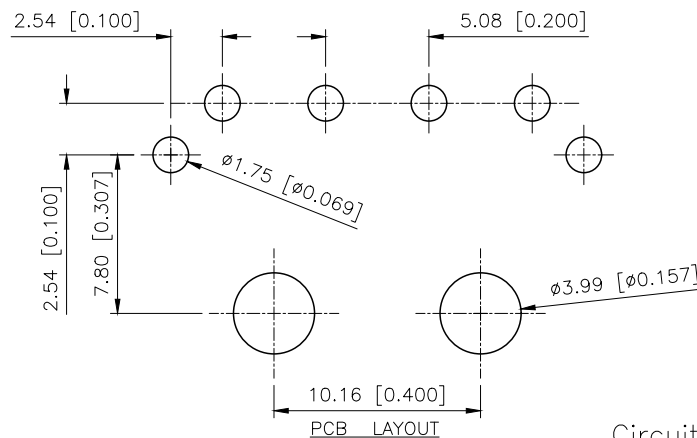

Specifications
Material:Nylon 66,UL94V-2
Pitch:5.8mm<.049">
Temperature Range工作温度:-25 C~+85 C
Current Rating额定电流:10A AC,DC
Voltage Rating额定电压:250V AC,DC
Withstand Voltage耐压值:1500V AC/minute
Contact Resistance接触电阻:10M Max
Insulation Resistance绝缘电阻:1000M Min
Mates With ZL

PART NO.:

X5050 W R-04 S-N2 SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:R-Stright 90°
- ④Row No.Pin No:XX-04Pin
- ⑤Special No:S-With Positioning Column
- ⑥Material:N2-PA66 UL94V-2
- ⑦Planting:SN-Bright Tin Plated
- ⑧Color: Blank-Natural Color

X5050WR-04S-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	X5050H
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XK B Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	①	MODEL TYPE:	5.08mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X5050WR-04S-N2SN
APPROVED		SIZE:	A4	DWG NO.:	X-X5050WR-04S-N2SN