
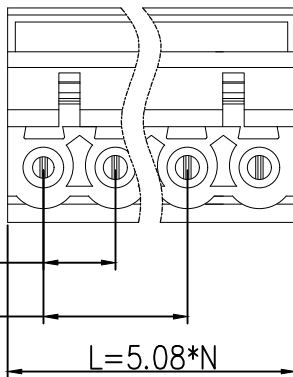




标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

Materials and Electroplating

- ①. Screw: M2.5, iron, galvanized, straight groove
②. Plastic body: PA66
③. Clip: Copper, nickel plated
④. Square box: iron, nickel plated
⑤. Plastic cover plate: PA66
Electrical performance
Rated voltage: 300V
Rated current: 15A
Contact resistance: 20m Ω (Max)
Insulation resistance: 500M Ω/DC500V
Voltage endurance: AC1500V/1Min
Wire diameter used: 28-12AWG
mechanical properties
Temperature range: -40 °C~+105 °C
Instantaneous temperature: +250 °C for 5 seconds
Torque: 0.4Nm (3.6 Ib. in)
Stripping length: 7-8mm

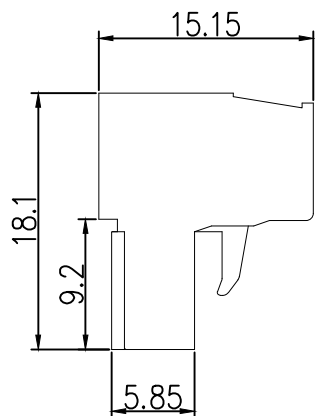

2	方盒	铁	镀镍	
1	基座	PA66	绿色	
序号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名		接线端子													
			TITLE															
			料 号		HC-JXDZK-5.08-12P-A													
			PART NO															
GENERAL TOLERANCES (UNLESS SPECIFIED)			比 例	1:1														
			SCALE															
<table border="1"><tr><th colspan="2">公差参数</th></tr><tr><th>尺寸</th><th>公差</th></tr><tr><td>2-6P</td><td>±0.10</td></tr><tr><td>7-12P</td><td>±0.20</td></tr><tr><td>13-19P</td><td>±0.25</td></tr><tr><td>19-24P</td><td>±0.30</td></tr></table>			公差参数		尺寸	公差	2-6P	±0.10	7-12P	±0.20	13-19P	±0.25	19-24P	±0.30	单 位	MM	制 图	AhYe
公差参数																		
尺寸	公差																	
2-6P	±0.10																	
7-12P	±0.20																	
13-19P	±0.25																	
19-24P	±0.30																	
			UNIT		DRAW													
X. xxx ± 0.15			张 数	1 OF 1	审 核	夏操云												
X. xx ± 0.25			PART NO		CHECKED													
X. x ± 0.35			版 本	A	批 准	赵亮亮												
			REV		APPROVE													
																		