

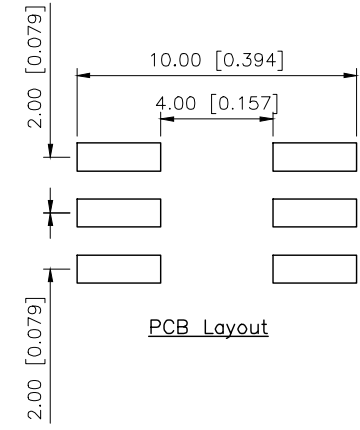



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X5		2025.07.16	






PCB Layout

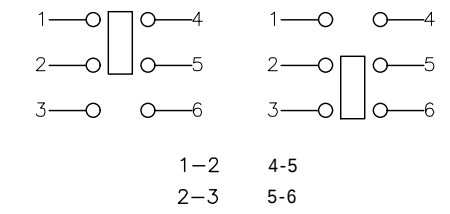

- Specifications()
- 1.Current rating():100mA 30vDC
 - 2.Contact resistance():≤200mΩ
 - 3.Insulation resistance():≥100MΩ Min
 - 4.Operating Force():250±50gf
 - 5.Travel()2.0±0.20mm
 - 6.Mating cycles 10000 cycles Min

PAPT NO	XKB5858-X-TP-75
OPERATION	W:NO LOCK Z:LOCK

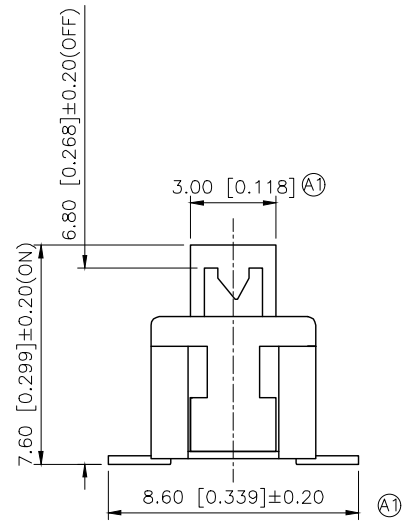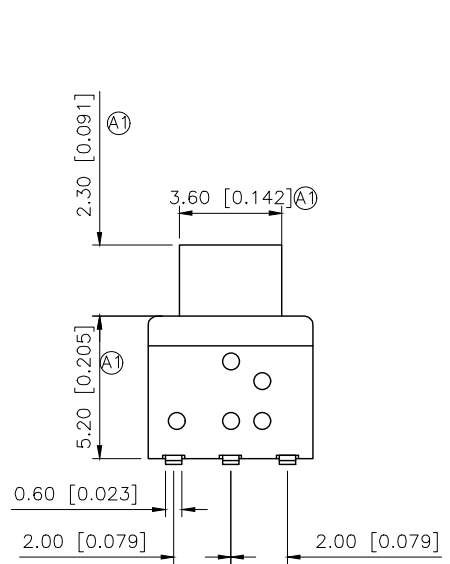

7	Crochet Needle	Sus	
6	Spring	Sus	
5	Contact spring	Composite silver	
4	Cover	PPA	Black
3	Guide rod	PPA	Beige
2	Terminal	H62 T=0.30mm	
1	Contact	PPA	Grey
ITEM	PAPT NAMF	MATERIAL	COLOR/NOTES

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN		VIEW:	MODEL TYPE: KEY SWITCH
CHECKED		UNIT: mm/in	PART NO.: XKB5858-W-TP-75
APPROVED		SIZE: A4	DWG NO.: