
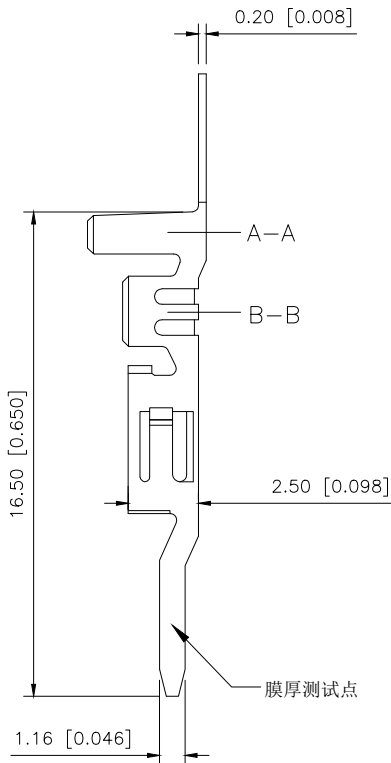



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.12.22	阿树

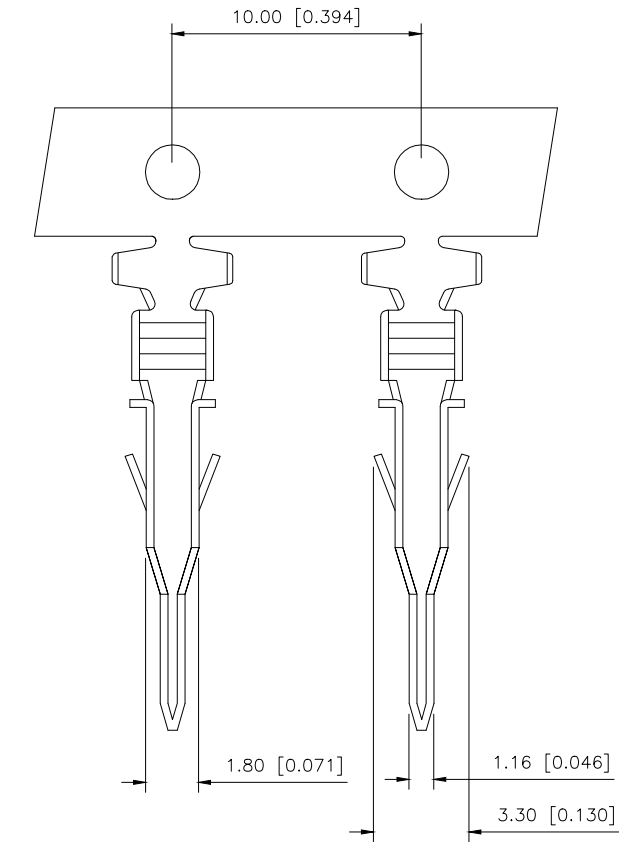

- Specifications
- Voltage rating:250V AC/DC
 - Current rating:7A AC/DC
 - Withstanding voltage:1500V AC/minute
 - Temperature range:-45° to+125°
 - Insulation resistance:≥1000MΩ Min
 - Contact resistance:≤20mΩ Max

PART NO.:
X9357 T M-B SN-H
① ② ③ ④ ⑤ ⑥

- ① Series No.
② Category:T-Terminal
③ Appearance type:M-Male Terminal
④ Material: B-Brass
⑤ Plating Style: SN-Bright Tin Plating
⑥ Special No:H-High Feet

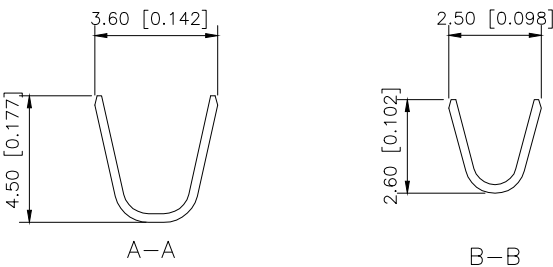

X9357TM-BSN-H	Phosphor Bronze	AWG#18	3.00mm(Max)	TIN-PLATE80-120U	X9357HF
PART NO	Material	Wire Range	Insulation O.D	Finish	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	4.20 mm Crimp Style Connector
PART NO.:	X9357TM-BSN-H
DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1