

LIN Interface RGB Controller with MCU

FEATURES

- AEC-Q100 Grade1, ISO7637 Level III
- Operating voltage range: 6V~18V, load dump voltage: 45V
- 32-bit MCU
- Maximum operating frequency: 16MHz
- 64KB FLASH, with erase protection function
- 16KB SRAM memory
- 4-channel 16bit PWM LED driver, maximum 60mA/channel
- Support LED junction voltage (0V~8V) detection, support LED temperature compensation
- 6 general GPIO ports
 - Support PWM mode
 - Support external LIN transceiver multiplexing function
- Integrated LIN transceiver, support automatic addressing function
- Support SAE J2602/LIN2.x protocol LIN slave interface
- 1 WDT and 1 WWDG
- 2 basic Timer, 1 wakeup Timer
- 12-bit ADC converter, supporting 13 channels
 - Optional reference voltage (1.2V/2.4V/3.3V)
 - Temperature sensor
 - VBAT voltage detection
 - LED junction voltage detection
- Support for SWD debugging
- Support Power on Reset (POR) and Brown out Reset (BOR) function
- Operation range: -40~125°C
- Package: WBQFN 4x4-20L

GENERAL DESCRIPTION

AW23004QNR-Q1 is a chip specially designed for ambient lighting, which can improve the convenience of debugging the overall atmosphere light effect of the car.

The AW23004QNR-Q1 integrates a 32-bit MCU. The MCU provides superior computational performance and an efficient interrupt system, while the peripheral devices use a smaller number of pins and lower power consumption.


AW23004QNR-Q1 integrates 64KB FLASH memory with erase/write protection function. The LIN communication module is integrated to support the transceiver function of LIN communication. Integrated 12-bit ADC for LED junction voltage and temperature detection, supporting 13 channels, VREF voltage can be configured to 1.2V/2.4V/3.3V. Support 4 LED drivers, the maximum current of each channel is up to 60mA. Support 16-bit PWM dimming, support 80Hz~250Hz dimming frequency. Two basic timers and one WDT are integrated. Six general GPIO ports are integrated to support PWM mode and external LIN receiver interconnection. The SWD debug interface is integrated with built-in Power on Reset (POR) and Brown out Reset (BOR) functions to effectively protect the chip.

AW23004QNR-Q1 is packaged in WBQFN 4x4-20L.

APPLICATIONS

Automotive LED lighting

TYPICAL APPLICATION CIRCUIT

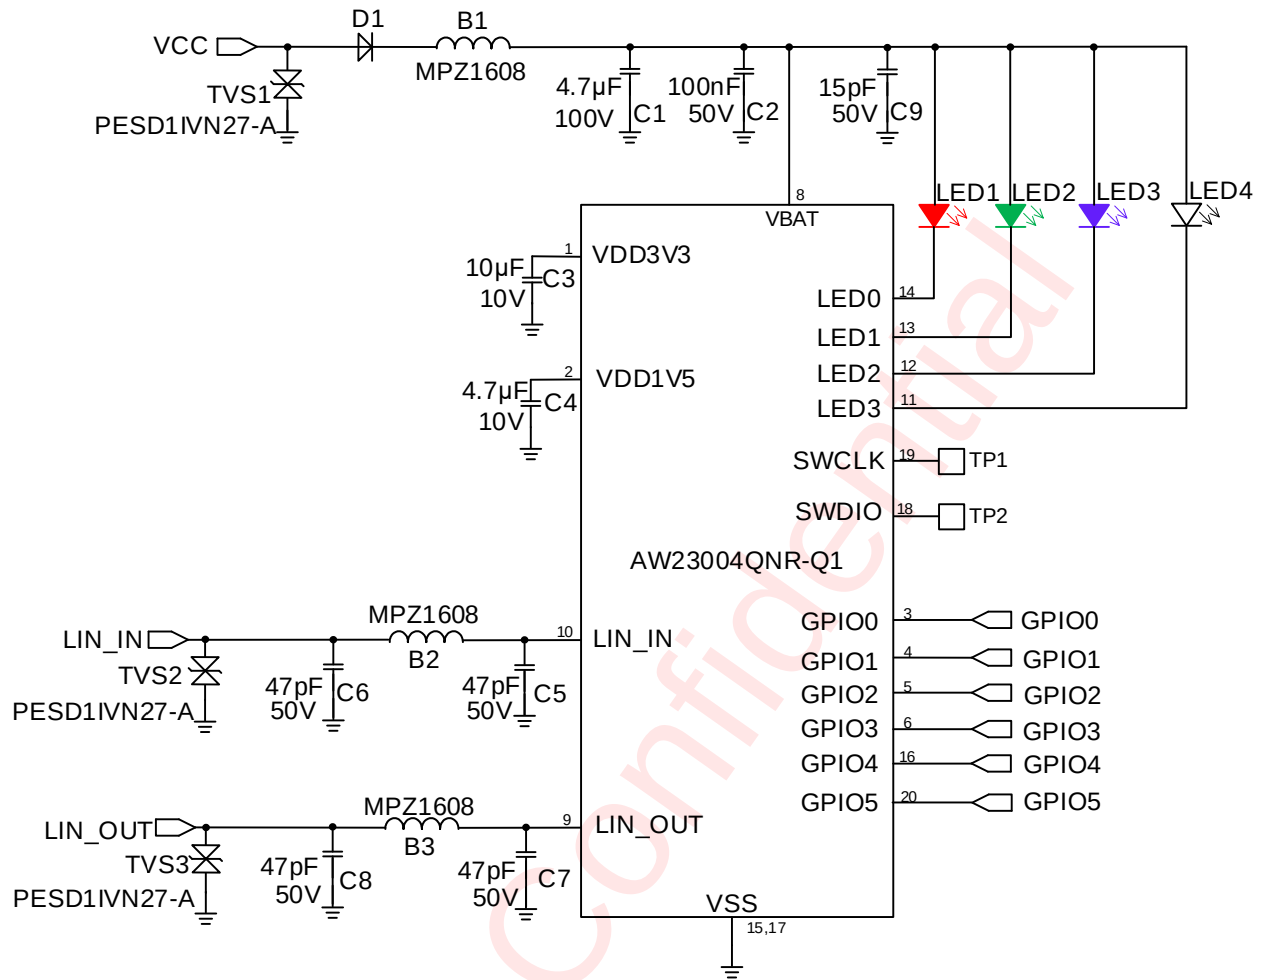

PIN CONFIGURATION AND TOP MARK

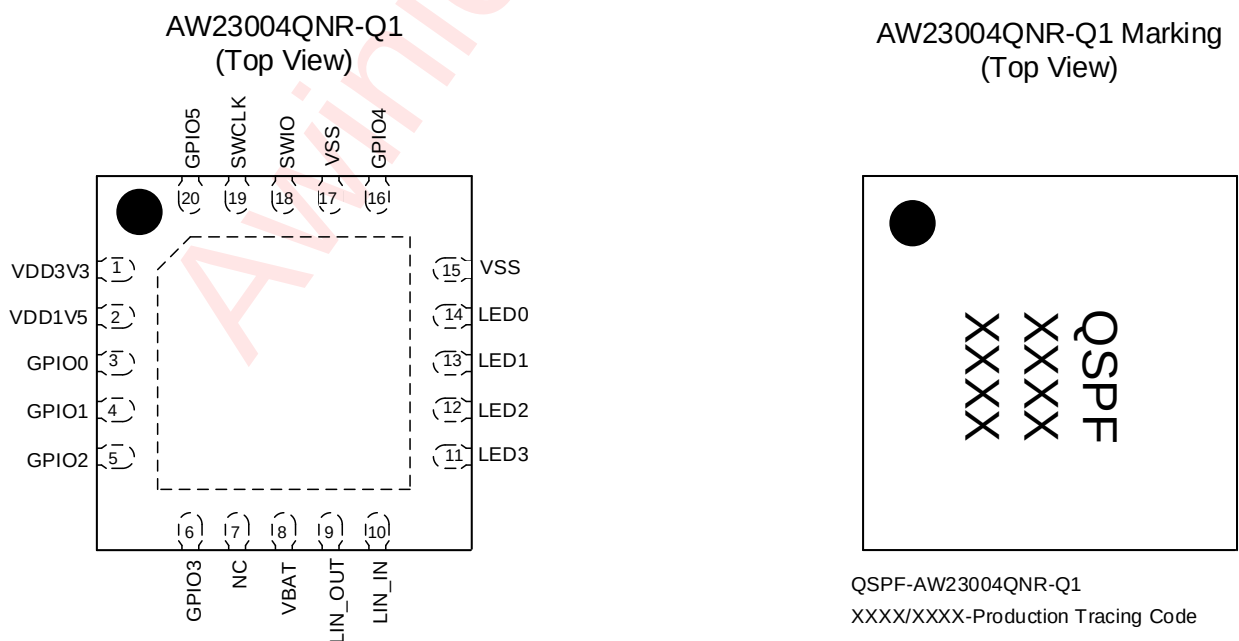


Figure 1 Pin Configuration and Top Marking

PIN DEFINITION

No.	NAME	DESCRIPTION
1	VDD3V3	Connect to the external 10 μ F capacitor.
2	VDD1V5	Connect to the external 4.7 μ F capacitor.
3	GPIO0	General purpose IO.
4	GPIO1	General purpose IO.
5	GPIO2	General purpose IO/LINS RxD.
6	GPIO3	General purpose IO/LINS TxD.
7	NC	No connect.
8	VBAT	Supply voltage.
9	LIN_OUT	J2602 LIN 2.x.
10	LIN_IN	J2602 LIN 2.x.
11	LED3	Constant current sink, connect to LED's cathode.
12	LED2	Constant current sink, connect to LED's cathode.
13	LED1	Constant current sink, connect to LED's cathode.
14	LED0	Constant current sink, connect to LED's cathode.
15	VSS	Ground.
16	GPIO4	General purpose IO.
17	VSS	Ground.
18	SWDIO	Debugger data. Integrated weak pull up.
19	SWCLK	Debugger clk. Integrated weak pull up.
20	GPIO5	General purpose IO.
21	EPAD	Ground.

FUNCTIONAL BLOCK DIAGRAM

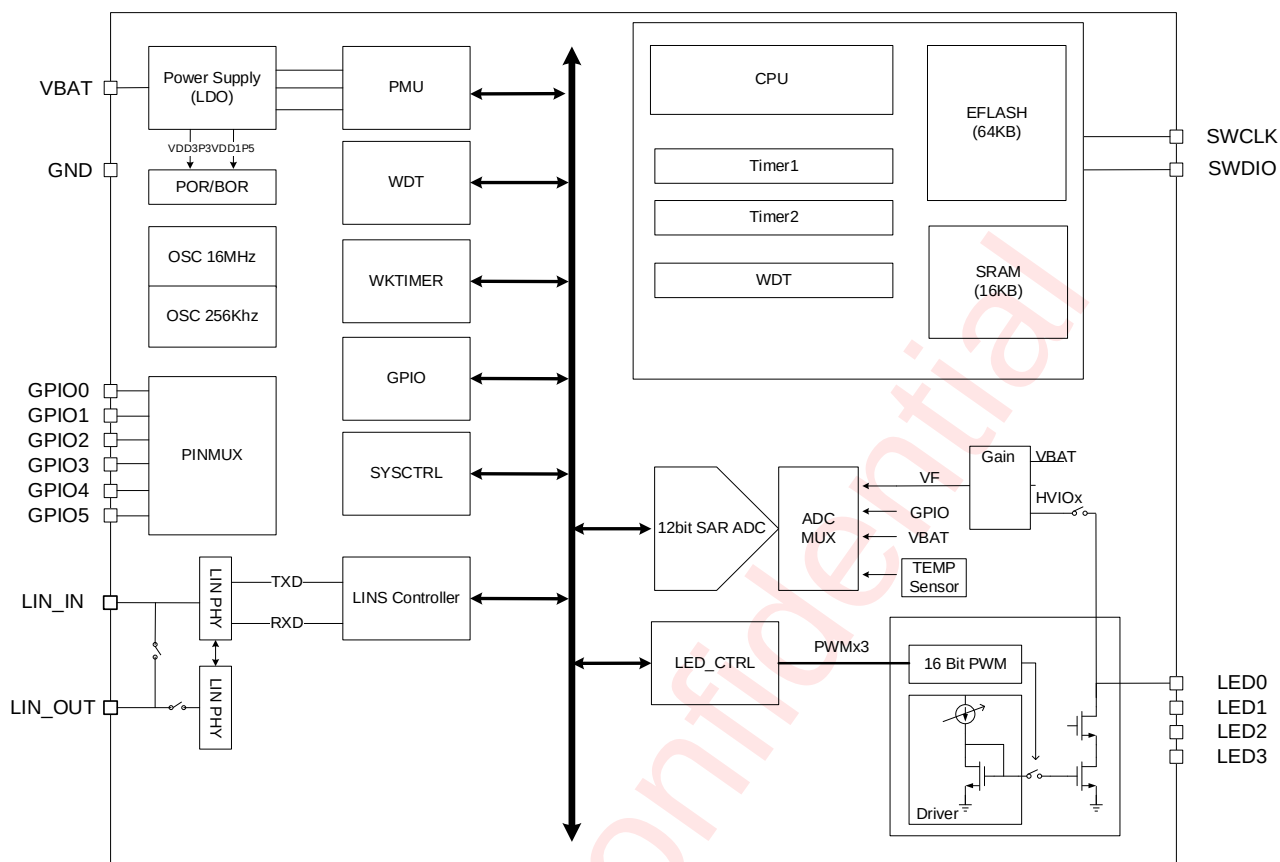


Figure 2 Function Block Diagram

TYPICAL APPLICATION CIRCUITS

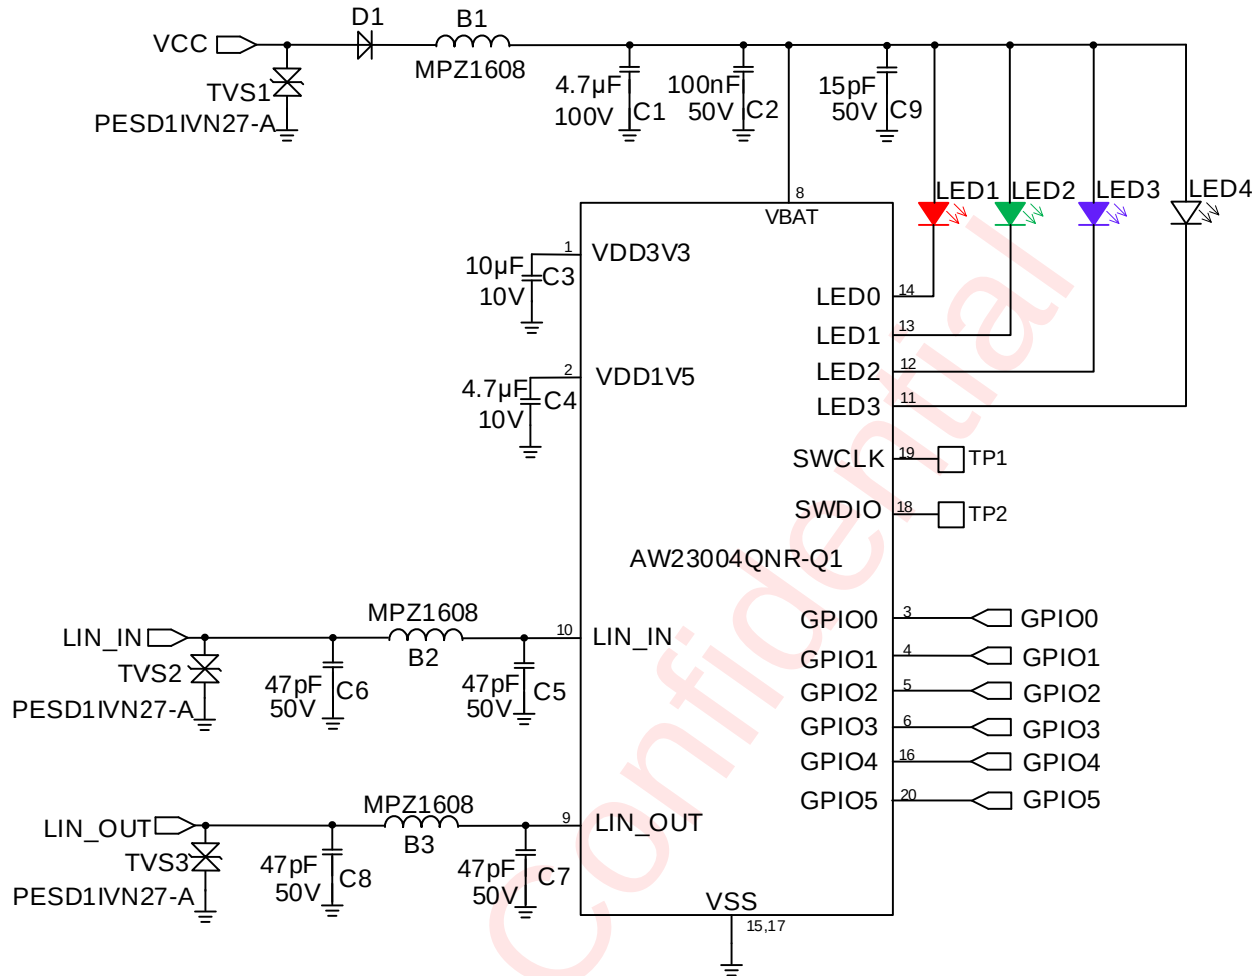


Figure 3 Typical Application Circuit

ORDERING INFORMATION

Part Number	Temperature	Package	Marking	Moisture Sensitivity Level	Environmental Information	Delivery Form
AW23004QNR-Q1	-40°C~125°C	WBQFN 4mmx4mmx0.85 mm-20L	QSPF	MSL3	RoHS+HF	4500 units/ Tape and Reel

ABSOLUTE MAXIMUM RATINGS^(NOTE1)

PARAMETERS		RANGE
VBAT	500ms	-0.3V to 45V
	5min	-0.3V to 28V
	5ms	-1.1V
	20ns	-4V
	ISO 7637-2 pulse 1, VBAT=13.5V, TA=(23±5)°C	-112V

	ISO 7637-2 pulse 2a, VBAT=13.5V, TA=(23±5)°C	55V
	ISO 7637-2 pulse 2b, VBAT=13.5V, TA=(23±5)°C	10V
	ISO 7637-2 pulse 3a, VBAT=13.5V, TA=(23±5)°C	-165V
	ISO 7637-2 pulse 3b, VBAT=13.5V, TA=(23±5)°C	112V
LIN_IN, LIN_OUT	500ms	-40V to 40V
	ISO 7637-3 pulse +2a, VBAT=13.5V, TA=(23±5)°C	5V
	ISO 7637-3 pulse -2a, VBAT=13.5V, TA=(23±5)°C	-5v
	ISO 7637-3 pulse 3a, VBAT=13.5V, TA=(23±5)°C	-80V
	ISO 7637-3 pulse 3b, VBAT=13.5V, TA=(23±5)°C	60V
LED0~2	500ms	-0.3V to 45V
	5min	-0.3V to 28V
	5ms	-1.1V
	20ns	-4V
GPIO0~5, SWDCLK, SWDIO		-0.3V to 3.6V
Junction-to-ambient thermal resistance θ_{JA}		40°C /W
Maximum operating junction temperature T_{JMAX}		150°C
Storage temperature T_{STG}		-55°C to 150°C
Lead temperature (soldering 10 seconds)		260°C
ESD(Including CDM HBM) ^(NOTE 2)		
VBAT/LIN_IN/LIN_OUT to GND HBM (Test condition: AEC-Q100-002-RevE)		±4kV
Other PINS HBM (Test condition: AEC-Q100-002-RevE)		±2kV
CDM (Test condition: AEC-Q100-011-RevD)		±750V
Latch-Up		
Test condition: AEC_Q100-004-Rev-C		+IT: 450mA -IT: -450mA

NOTE1: Conditions out of those ranges listed in "absolute maximum ratings" may cause permanent damages to the device. In spite of the limits above, functional operation conditions of the device should within the ranges listed in "recommended operating conditions". Exposure to absolute-maximum-rated conditions for prolonged periods may affect device reliability.

NOTE2: The human body model is a 100pF capacitor discharged through a 1.5kΩ resistor into each pin.

Recommended Operating Conditions

Symbol	Parameter	Min.	Typ.	Max.	Unit
V _{BAT}	Input voltage	6	13.5	18	V
C ₁	Input capacitance connected to VBAT	2.2	4.7	10	μF
C ₂	Input capacitance connected to VBAT		0.1		μF
C _{3V3}	Capacitance connected to VDD3V3	4.7		10	μF
C _{1V5}	Capacitance connected to VDD1V5	1		4.7	μF
T _A	Operating free-air temperature range	-40°	25	125	°C

ELECTRICAL CHARACTERISTICSVBAT=6V to 18V, T_A=25°C for typical values (unless otherwise noted)

PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
Operation Conditions					
VBAT		6	13.5	18	V
IO Supply(VDD3V3)		2.97	3.3	3.63	V
ASIC Core Supply		2.97	3.3	3.63	V
MCU Core Supply	MCU Core Supply including SRAM and Flash	1.4	1.55	1.65	V
FLASH Memory					
Sector Endurance		20k			cycles
Data Retention	@25°C	100			Years
Data Retention	@85°C	25			Years
SRAM					
Min Retention Voltage	Minimum Retention Voltage below which SRAM data are not guaranteed.	1.35			V
CLOCKS					
System RC Oscillator Frequency			16		MHz
System RC Oscillator Accuracy	16MHz	-3		3	%
System RC Oscillator start up time			10		μs
Auxiliary system clock	Used in sleep mode		256		kHz
Auxiliary system clock Accuracy		-10		10	%
POR/BOR					
POR power-on detection threshold	Triggered by VDD3V3 power-on	2.1	2.4	2.7	V
POR power-on detection hysteresis			0.2		V
Under Voltage Threshold of BOR	Triggered by VDD3V3 power-off, user configurable	2.4	2.55	2.7	V
		2.5	2.65	2.8	
		2.6	2.75	2.9	
		2.7	2.85	3	
		2.8	2.95	3.1	
Battery Monitor					
Under Voltage	Triggered by VBAT power-off,	4.5	5.0	5.5	V

PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
Threshold	generates interrupt to MCU(except in sleep mode), user configurable				
		5.5	6.0	6.5	V
		6.5	7.0	7.5	V
		7.5	8.0	8.5	V
		8.5	9.0	9.5	V
Under Voltage hysteresis	The under voltage threshold is set to 5V, user configurable	0.01	0.125	0.255	V
Under Voltage Digital debounce time	User configurable, the step size is 62.5ns or 62.5μs			16.32	ms
Over Voltage Threshold	Triggered by VBAT power-on, Generates interrupt to MCU(except in sleep mode), user configurable	21	22.5	24	V
		23.5	25	26.5	
		26	27.5	29	
		28.5	30	31.5	
		31	32.5	34	
		33.5	35	36.5	
		36	37.5	39	
Over Voltage Hysteresis	The over voltage threshold is set to 25V, user configurable	0.04	0.714	1.624	V
Over Voltage Digital debounce time	User configurable, the step size is 62.5ns or 62.5μs			16.32	ms
Current Source (LED)					
LED Dropout Voltage	The voltage when the current drops to 90%(60mA)			1.6	V
Sink Current	VBAT>6V	0.12		60	mA
Sink Current step size			120		μA
Sink Current Error	The temperature is 25°C	-7		+7	%
Temperature Drift			-0.025		%/°C
Over Temperature Monitor					
Overtemp Threshold	Generates interrupt or reset to MCU	90		165	°C
Overtemp hysteresis		-10	-14		°C
Temperature Sensor					
Temperature detection range	The MCU reads ADC data related to temperature detection	-40		150	°C
Temperature detection Accuracy		-10		+10	°C
Active current			8		μA
Differential Amplifier (LED VFW measurement)					

PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
Input Voltage(Junction voltage range of LED lamp)	<4V @Gain=1/4	0		4	V
	>4V @Gain=1/8	4		8	V
Output Voltage Range		0		1	V
Output Voltage Relative Error				1	%
Gain	User configurable		1/4 or 1/8		
Wake Up					
T _{WAKEUP}	LIN_IN/LIN_OUT, User configurable	30	150	200	μs
Wake Up Timer	Wakeup Time =TimerLoadCount/16kHz, TimerLoadCount = 0x0~0x1FFFFFFF, the default value is 0x1FFFFFFF	0		2097152	ms
ASIC Watchdog timer					
Timeout	User configurable	0.128		16	s
SAR ADC					
Resolution			12		Bits
Conversion Speed	17 cycles per conversion (4 cycles for sampling and 13 cycles for conversion)			200	ks/s
ADC Clock	16MHz RC clock divided by 4			4	MHz
INL	Guaranteed by design	-2		2	LSB
DNL	Guaranteed by design	-1		1	LSB
Reference voltage	Post Calibration	1.19	1.20	1.21	V
LIN(VBAT=8V~16V, VBUS is the voltage of lin bus, VSUP is the chip's power supply voltage)					
Supply Voltage	supply voltage range	6	13.5	18	V
I _{BUS_LIM}	Current Limitation for Driver dominant state driver on VBUS = VBAT=16V	40		200	mA
R _{slave}	Lin Slave Pull-up	20	30	60	kΩ
BUS_PAS_dom	Driver off, VBUS=0, VBAT=12V	-1			mA
I _{BUS_PAS_rec}	Driver off, VBUS>VBAT 8V<VBAT<16V, 8V<VBUS<16V			20	μA
I _{BUS_no_GND}	Control unit disconnected from Ground, GND = VSUP 0V<VBUS<16V, VBAT = 12V, Loss of local ground must not affect communication in the residual network. LIN 2.2A	-1		+1	mA
I _{BUS_no_BAT}	VBAT disconnected 0<VBUS<16V,			100	μA

PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
	V _{BAT} =0V LIN 2.2A Node has to sustain the current that can flow under this condition. Bus must remain operational under this condition.				
Device Bus Leakage current V _{BAT} disconnected	0V<V _{BUS} <18V, V _{BAT} =V _{GND} =0V J2602	-23		23	μA
Device Bus Leakage Current Ground Disconnected	V _{BAT} = V _{GND} =12V, 0V<V _{BUS} <18V J2602	-100		100	μA
BUS_VOL Transmitter dominant voltage	Load 500Ohms, driver open drain active			0.2* V _{BUS}	V
BUS_VOH Transmitter recessive voltage	Driver open drain high impedance	0.8* V _{BUS}			V
C _{LIN}	LIN pin input capacitance			35	pF
V _{BUS} rec	Receiver recessive state	0.6* V _{BUS}			V
V _{BUS} dom	Receiver dominant state			0.4* V _{BUS}	V
V _{hys}	Receiver hysteresis V _{hys} = V _{BUS} rec -V _{BUS} dom			0.175* V _{BUS}	V
V _{BUS} _CNT	Center point Receiver V _{BUS} _CNT = (V _{BUS} rec+V _{BUS} dom)/2	0.475* V _{BUS}	0.5* V _{BUS}	0.525* V _{BUS}	V
Trx_pdr	Rising edge propagation delay of receiver C _{RXD} load 20pF (RX output of transceiver, internal node, access in test mode)			6	μs
Trx_pdf	Falling edge propagation delay of receiver C _{RXD} load 20pF (RX output of transceiver, internal node, access in test mode)			6	μs
Trx_sym	symmetry of receiver propagation delay Trx_sym= Trx_pdf- Trx_pdr	-2		2	μs
LIN Timing parameters					
D1 Duty Cycle (20kbits/s)	THRec(max) = 0.744 x V _{SUP} ; THDom(max) = 0.581 x V _{SUP} ; V _{SUP} = 7.0V...16V; tBit = 50μs; D1 = tBus_rec(min) / (2 x tBit)	0.396			-
D2 Duty Cycle (20kbits/s)	THRec(min) = 0.422 x V _{SUP} ; THDom(min) = 0.284 x V _{SUP} ; V _{SUP} = 7.6V...16V; tBit = 50μs;			0.581	-

PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
	$D2 = t_{Bus_rec(max)} / (2 \times t_{Bit})$				
D3 Duty Cycle (10.4kbits/s)	THRec(max) = 0.778 x VSUP; THDom(max) = 0.616 x VSUP; VSUP = 7.0V...16V; tBit = 96μs; $D3 = t_{Bus_rec(min)} / (2 \times t_{Bit})$	0.417			-
D4 Duty Cycle (10.4kbits/s)	THRec(min) = 0.389 x VSUP; THDom(min) = 0.251 x VSUP; VSUP = 7.6V...16V; tBit = 96μs; $D4 = t_{Bus_rec(max)} / (2 \times t_{Bit})$			0.59	-
$t_{Bus_rec(max)} - t_{Bus_dom(min)}$	Δt3, 10.4kbs operation, low speed mode, J2602			15.9	μs
$t_{Bus_dom(max)} - t_{Bus_rec(min)}$	Δt4, 10.4kbs operation, low speed mode, J2602			17.28	μs
GPIOs					
GPIO V _{IL}	Input Low Voltage			0.3* VDD3V3	V
GPIO V _{IH}	Input High Voltage	0.7* VDD3V3			V
GPIO I _{OL}	Max load current with output voltage=VOL			10	mA
GPIO I _{OH}	Max load current with output voltage=VOLH			10	mA
GPIO V _{OL}	Output Low Voltage			0.4	V
GPIO V _{OH}	Output High Voltage	2.4			V
GPIO P _U	Pull Up Resistance		50		kΩ
GPIO P _D	Pull Down Resistance		50		kΩ
SWCLK, SWDIO					
SWD V _{IL}				0.3* VDD3V3	V
SWD V _{IH}		0.7* VDD3V3			V
SWD V _{OL}				0.4	V
SWD V _{OH}		2.4			V
SWD P _U			20		kΩ

TYPICAL CHARACTERISTICS

Current Consumption

Mode	Conditions	Min	Typ	Max	Unit
Normal	Ta=85°C, VBAT=18V, RCO=16MHz, full functionality: MCU running, no flash write, LED OFF, ADC ON, VBAT and TEMP monitor ON, WDT ON.			10	mA
Sleep	Main regulator (3.3V) ON, Load dump protection active. Ta=85degC max, VBAT=13.5V Overvoltage/Undervoltage detection, PWM, LED driver, Tempsensor and ADC are OFF except one LIN RX on and GPIO toggling and wake up timer.	15	35	60	μA

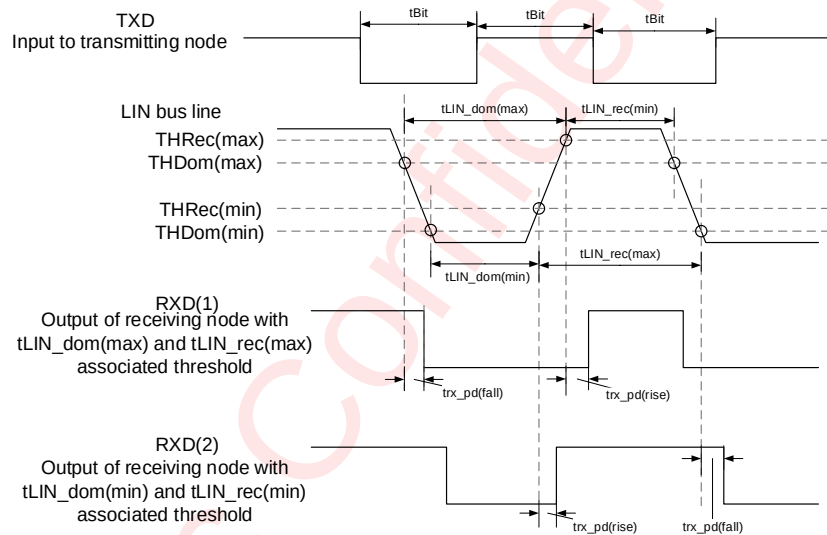


Figure 4 LIN timing

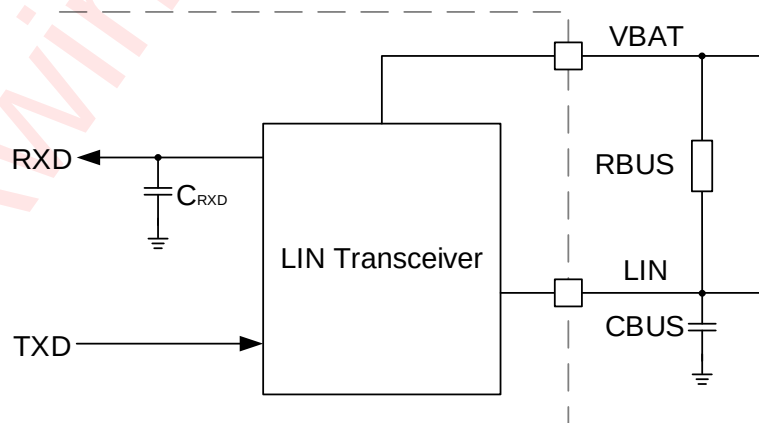


Figure 5 LIN test circuit

SYSTEM AND FLASH OVERVIEW

This chapter describes how to power on, power off, initialize and fine-tune the system, and enter and exit the low-power mode.

Power-on

The car battery is powered by VBAT, and there are multiple Ldos inside the chip to establish the on-chip power system:

- LDO3V3: Input: 13.5V, Output: 3.3V
- LDO1V5: Input: 3V, Output: 1.5V

After the power supply is connected to the VBAT pin (the peripheral circuit of AW23004QNR-Q1 has been confirmed to be intact), the voltage on the chip power pin VBAT pin meets the working voltage range, and the system will start to work.

The following figure shows the power-on timing relationship of AW23004QNR-Q1 (VBAT, LDO, GPIO, LIN, etc.) :

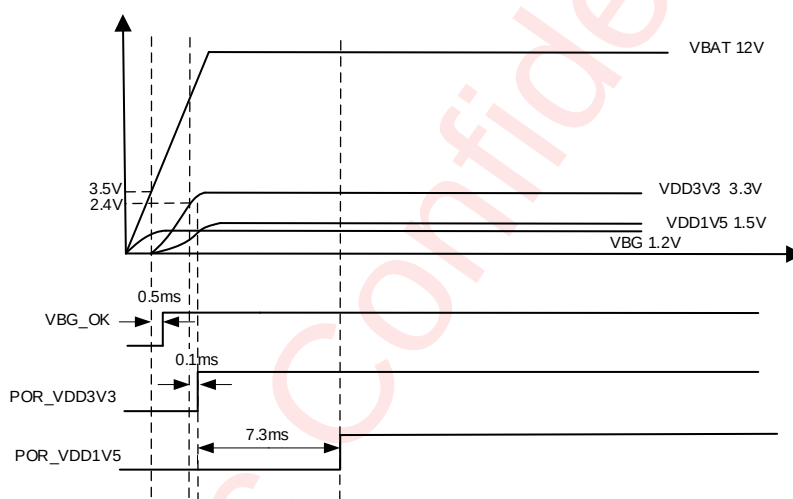


Figure 6 AW23004QNR-Q1 Power on Timing

After rising from POR_VDD1V5, the hardware initialization time is 2.1ms. Considering the hardware initialization time, it is about 10ms from the start of power on to the chip being able to work normally.

Power-down

When VDD_3V3 or VBAT is below the preset voltage threshold, the whole chip will be reset immediately.

Memory

AW23004QNR-Q1 has a built-in 16KB SRAM, which can support byte (8 bits), half-word (16 bits), or word (32 bits) read and write access. The built-in FLASH size is 64KB, supports read, write, erase operations, and supports access with 32-bit words. FLASH is used to save the chip execution code, including initialization procedures and various detection, judgment, processing procedures.

- 64KB embedded FLASH for storing programs and data
- 6KB NVR area for storing user configuration information

Memory Mappings

Address	Interface	Description
0x00000000 – 0x0000FFFF	FLASH	64Kbytes of Flash Memory, user programmable
0x00010000 – 0x000117FF	NVR	6KB
0x00012000 – 0x1FFFFFFF	NA	-
0x20000000 – 0x20003FFF	SRAM	16KB SRAM
0x20004000 – 0x3FFFFFFF	NA	-
0x40004000 – 0x400040FF	WDT	Watchdog timer
0x40004100 – 0x400041FF	TIMER1	Basic timer 1
0x40004200 – 0x400042FF	TIMER2	Basic purpose timer 2
0x40004300 – 0x400043FF	NA	-
0x40004400 – 0x400044FF	RCCM	Timer, WDT Clock Reset Controller
0x40004500 – 0x400045FF	FMC	FLASH controller
0x40004D00 – 0x4FFFFFFF	NA	-
0x50000000 – 0x500000FF	RCC	Clock & Reset Generator
0x50000100 – 0x500001FF	PMU	Power Management Unit
0x50000200 – 0x500002FF	NA	-
0x50000300 – 0x500003FF	WWDG	Window Watchdog Register
0x50000400 – 0x500004FF	LED_CTRL	LED Controllers
0x50000500 – 0x500005FF	LINS	LIN slave control and PHY registers
0x50000600 – 0x500006FF	LINM	LIN master PHY register
0x50000700 – 0x500007FF	ADC_CTRL	ADC controller
0x50000800 – 0x500008FF	AFIO	Alternate function
0x50000900 – 0x500009FF	SYSCTRL	System configuration and retention memory
0x50000A00 – 0x50000AFF	GPIO	GPIO bit control and configuration
0x50000E00 – 0x50000EFF	WAKEUP_TIMER	Wake up timer

DETAILED FUNCTIONAL DESCRIPTION

Core Performance

AW23004QNR-Q1 integrates a 32-bit CPU core. The platform provides excellent computing performance and efficient interrupt system, while the peripheral devices use less pins and lower power consumption.

A nested vector interrupt controller is built in. The interrupt controller can handle up to 32 maskable interrupt channels and supports four different interrupt priorities.

Interrupt and Exception Vectors

The vector table of AW23004QNR-Q1 is as follows.

Location	Priority	Priority type	Abbreviations
-	-3	Fixed	Reset_Handler
-	-2	Fixed	NMI_Handler
-	-1	Fixed	HardFault_Handler
-	0	Configurable	MemManage_Handler
-	1	Configurable	BusFault_Handler
	2	Configurable	UsageFault_Handler
-	3	Configurable	SVC_Handler
	4	Configurable	DebugMon_Handler
-	5	Configurable	PendSV_Handler
-	6	Configurable	SysTick_Handler
0	7	Configurable	WDT_Handler
1	8	Configurable	Timer1_Handler
2	9	Configurable	Timer2_Handler
16	23	Configurable	LINS_WU_Handler
17	24	Configurable	LINS_PHY_Handler
18	25	Configurable	TIMER_WU_Handler
19	26	Configurable	BOR_Handler
20	27	Configurable	WWDG_Handler
21	28	Configurable	UV_Handler
22	29	Configurable	OV_Handler
23	30	Configurable	LINS_Handler
24	31	Configurable	ADC_Handler
27	34	Configurable	GPIO_Handler
29	36	Configurable	OVTEMP_Handler

FLASH_CTRL

Overview

AW23004QNR-Q1 is equipped with a built-in 64KB FLASH memory, which serves as storage for the application program. Upon powering up the chip, the CPU fetches instructions from the FLASH to execute the application program.

Features

- 64KB FLASH main storage area and 6KB user NVR area, 512 bytes per sector
- Support FLASH writing in word
- Support FLASH sector erase, FLASH chip erase
- Support high-speed access to the FLASH storage area using the AHB bus
- Support code protect

Functional Description**FLASH Structure**

FLASH area	Name	FLASH Address	Size (byte)
Main FLASH Memory(64K)	Sector 0	0x0000 0000 - 0x0000 01FF	0.5 Kbyte
	Sector 1	0x0000 0200 - 0x0000 03FF	0.5 Kbyte
	Sector 2	0x0000 0400 - 0x0000 05FF	0.5 Kbyte
	Sector 3	0x0000 0600 - 0x0000 07FF	0.5 Kbyte
	.	.	.
	.	.	.
	.	.	.
	Sector 124	0x0000 F800 - 0x0000 F9FF	0.5 Kbyte
	Sector 125	0x0000 FA00 - 0x0000 FBFF	0.5 Kbyte
NVR block (6K)	Sector 126	0x0000 FC00 - 0x0000 FDFF	0.5 Kbyte
	Sector 127	0x0000 FE00 - 0x0000 FFFF	0.5 Kbyte
	Usr nvr Sector0	0x0001 0000 - 0x0001 01FF	0.5 Kbyte
	Usr nvr Sector1	0x0001 0200 - 0x0001 03FF	0.5 Kbyte
	Usr nvr Sector2	0x0001 0400 - 0x0001 05FF	0.5 Kbyte
	Usr nvr Sector3	0x0001 0600 - 0x0001 07FF	0.5 Kbyte
	.	.	.
	.	.	.
	.	.	.
	Usr nvr Sector9	0x0001 1200 - 0x0001 11FF	0.5 Kbyte
	Usr nvr Sector10	0x0001 1400 - 0x0001 13FF	0.5 Kbyte
	Usr nvr Sector11	0x0001 1600 - 0x0001 17FF	0.5 Kbyte

FLASH Read Protection

When the chip is powered on or the system is reset, the debug interface is disabled during the instruction period of the first 8192 cycles of CPU execution.

Write 0x91827364 to the register FLS_CODE_PROT to enable FLASH read protection and disable the debug interface.

Note: If the read protection function is turned on within 8192 instruction cycles after the power reset or system reset of the chip, the chip will not be connected through the debug interface later.

FLASH Power down Protection

In order to prevent damage to FLASH caused by unexpected power down in the process of FLASH erasing and writing, FLASH power down protection function can be enabled before FLASH erasing and writing operations. Here's how:

Step 1: Start the unexpected power down protection circuit (write 0x1 to register FLS_BOR_CFG);

Step 2: Wait for 100μs;

Step 3: Enable the unexpected power down protection function (write 0x3 to register FLS_BOR_CFG);

FLASH Erase Initialization

FLASH erase and write operations have different timing requirements under different system clock frequencies. The timing parameters of FLASH erase and write operations are configured as follows:

Register	Programming			Sector Erase			Chip Erase		
	16M	8M	4M	16M	8M	4M	16M	8M	4M
T_NVS	0x190	0xC8	0x64	0x190	0xC8	0x64	0x5A0	0x2D0	0x168
T_PGS	0x3C0	0x1E0	0xF0	0x3C0	0x1E0	0xF0	0x3C0	0x1E0	0xF0
T_PROG	0x5C	0x2E	0x17	0x5C	0x2E	0x17	0x5C	0x2E	0x17
T_RCV	0x3C0	0x1E0	0xF0	0x3C0	0x1E0	0xF0	0xDC0	0x6E0	0x370
T_RW	0xC	0x6	0x3	0xC	0x6	0x3	0xC0	0x60	0x30
T_ERASE				0x9600	0x4B00	0x2580	0x84D00	0x42680	0x21340
T_WAKEUP	0x192	0xC8	0x64	0x192	0xC8	0x64	0x192	0xC8	0x64
T_ADSSH	0xC	0x6	0x3	0xC	0x6	0x3	0xC	0x6	0x3

FLASH Sector Erase

- 1) Configure the timing parameters of the FLASH sector erase operation based on the system clock frequency, and reference to the recommended parameters in FLASH erase initialization.
- 2) Configure the ISP_ADR register: writing the address of the FLASH sector to be erased.
- 3) Configure the ISP_CMD register: setting the ISP_CMD bit field with the erase instruction. If the target FLASH address is in NVR region, set ISP_NVR bit field to 1, otherwise, set it to 0. Set ISP_CHIP bit field to 0.
- 4) Configure the ISP_GO register: setting the ISP_GO bit field to 1 to initiate sector erase operation. When this bit is cleared, indicating completion of sector erase operation.

FLASH Chip Erase

- 1) Configure the timing parameters of the FLASH full-chip erase operation based on the system clock frequency, and reference to the recommended parameters in the FLASH erase initialization.
- 2) Configure the ISP_CMD register: writing the erase instruction to the ISP_CMD bit field; set ISP_NVR bit field to 0; set ISP_CHIP bit field to 1.
- 3) Configure the ISP_GO register: writing 1 to the ISP_GO bit field to start the full-chip erase operation; When this bit is cleared, indicating that the full-chip erase operation is complete.

FLASH Write

Users can write data to the address by accessing it directly.

FLASH Read

Users can read FLASH data at a specified address through direct address access.

Register List**Register Mapping**

FLASH_CTRL_BASE : 0x40004500

Offset	Register Name	Description	Reset Value
0x00	ISP_CR	ISP Control Register	0x100
0x04	ISP_ADDR	ISP Address Register	0x0
0x10	ISP_CMD	ISP Command Register	0x20
0x14	ISP_GO	ISP Go Register	0x0
0x20	T_NVS	T_NVS Register	0x190
0x24	T_PGS	T_PGS Register	0x3C0
0x28	T_PROG	T_PROG Register	0x5C
0x2C	T_RCV	T_RCV Register	0x3C0
0x30	T_RW	T_RW Register	0xC
0x34	T_ERASE	T_ERASE Register	0x9600
0x38	T_WAKEUP	T_WAKEUP Register	0x192
0x40	T_ADSH	T_ADSH Register	0xC
0x48	FLS_CODE_PROT	FLASH Code Protection Register	0x0
0x4C	BOR_CFG	FLASH BOR Configue Register	0x0
0x54	BOR_STATE	BOR State Register	0x0

Register Detailed Description

RO: Read only, W: Write only, RW: Read/Write

ISP_CR: Address(0x000)				
Bit	Symbol	R/W	Description	Default
31:9	Reserved	RO	Not used	0
8	BYPASS_WR_FF	RW	0: Writing FF to flash will not be skipped 1: Writing FF to flash will be skipped	1
7:0	Reserved	RO	Not used	0

ISP_ADR: Address(0x004)				
Bit	Symbol	R/W	Description	Default
31:16	Reserved	RO	Not used	0
15:0	ISP_ADR	RW	Indicates the destination address of the ISP operation: 0x0000~0xFFFF	0

ISP_CMD: Address(0x010)				
Bit	Symbol	R/W	Description	Default

31:9	Reserved	RO	Not used	0
8	READONLY	RW	READONLY=1 to prohibit programming and erase operations.	0
7:6	Reserved	RO	Not used	0
5	ISP_NVR	RW	NVR sector selection. 0: Select FLASH main area; 1: Select NVR area .	0
4	ISP_CHIP	RW	Chip selection signal. 0: sector erase; 1: chip erase.	0
3:0	ISP_CMD	RW	ISP command. 0101: Erase ; Others: Reserved.	0

ISP_GO: Address(0x014)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	ISP_GO	RW	ISP operation start signal.(software write 1, hardware reset) 0: ISP operation completed, when ISP_GO is zero, software can be allowed to configure registers; 1: ISP operation is in progress.	0

T_NVS: Address(0x020)				
Bit	Symbol	R/W	Description	Default
31:11	Reserved	RO	Not used	0
10:0	T_NVS	RW	PROG/ERASE/CEb/NVR/Address set up time to Web.(unit: system clock period) Program: Min=20μs; 16MHz: T_NVS=0x190; 8MHz: T_NVS=0xC8; 4MHz: T_NVS=0x64. Sector erase: Min=20μs; 16MHz: T_NVS=0x190; 8MHz: T_NVS=0xC8; 4MHz: T_NVS=0x64. Chip Erase: Min=80μs; 16MHz: T_NVS=0x5A0; 8MHz: T_NVS=0x2D0; 4MHz: T_NVS=0x168.	0x190

T_PGS: Address(0x024)				
Bit	Symbol	R/W	Description	Default
31:11	Reserved	RO	Not used	0
10:0	T_PGS	RW	Web low level to PROG2 high level to set up tiime.(unit: system clock period) T_PGS: Min=50 μs ,Max=70 μs. 16MHz: T_PGS=0x3C0; 8MHz: T_PGS=0x1E0;	0x3C0

			4MHz: T_PGS=0xF0.	
--	--	--	-------------------	--

T_PROG: Address(0x028)				
Bit	Symbol	R/W	Description	Default
31:7	Reserved	RO	Not used	0
6:0	T_PROG	RW	Byte program time.(unit: sysytem clock period) T_PROG Min=5μs, max=6.5μs. 16MHz: T_PROG=0x5C; 8MHz: T_PROG=0x2E; 4MHz: T_PROG=0x17.	0x5C

T_RCV: Address(0x02C)				
Bit	Symbol	R/W	Description	Default
31:13	Reserved	RO	Not used	0
12:0	T_RCV	RW	program/erase reset time(unit: sysytem period) Program: Min=50μs; 16MHz: T_RCV=0x3C0; 8MHz: T_RCV=0x1E0; 4MHz: T_RCV=0xF0. Sector erase: Min=50μs; 16MHz: T_RCV=0x3C0; 8MHz: T_RCV=0x1E0; 4MHz: T_RCV=0xF0. Chip Erase: Min=200 μs; 16MHz: T_RCV=0xDC0; 8MHz: T_RCV=0x6E0; 4MHz: T_RCV=0x370.	0x3C0

T_RW: Address(0x030)				
Bit	Symbol	R/W	Description	Default
31:8	Reserved	RO	Not used	0
7:0	T_RW	RW	PROG/ERASE signal low level to next operation delay time.(unit: sysytem time) Program: Min=0.5μs; 16MHz: T_RW=0xC; 8MHz: T_RW=0x6; 4MHz: T_RW=0x3. Sector erase: Min=0.5μs; 16MHz: T_RW=0xC; 8MHz: T_RW=0x6; 4MHz: T_RW=0x3. Chip Erase: Min=10μs; 16MHz: T_RW=0xC0; 8MHz: T_RW=0x60; 4MHz: T_RW=0x30.	0xC

T_ERASE: Address(0x034)				
Bit	Symbol	R/W	Description	Default

31:20	Reserved	RO	Not used	0
19:0	T_ERASE	RW	ISP erase time.(unit : sysytem clock period) Sector erase: min=2ms, max=3ms; 16MHz: T_ERASE=0x9600; 8MHz: T_ERASE=0x4B00; 4MHz: T_ERASE=0x2580. Chip erase: min=30ms, max=40ms; 16MHz: T_ERASE=0x84D00; 8MHz: T_ERASE=0x42680; 4MHz: T_ERASE=0x21340.	0x9600

T_WAKEUP: Address(0x038)				
Bit	Symbol	R/W	Description	Default
31:9	Reserved	RO	Not used	0
8:0	T_WAKEUP	RW	Flash wakeup time(unit: sysytem period) FWUP=1: T_WAKEUP min = 10μs; FWUP=0: T_WAKEUP min = 20μs; 16MHz : T_WAKEUP=0x192; 8MHz: T_WAKEUP=0xC8; 4MHz: T_WAKEUP=0x64.	0x192

T_ADSH: Address(0x040)				
Bit	Symbol	R/W	Description	Default
31:5	Reserved	RO	Not used	0
4:0	T_ADSH	RW	BYTE[3:0]/Address/data setup/hold timing set. T_ADS\T_ADH: Min=0.5μs; 16MHz :T_ADSH=0xC; 8MHz: T_ADSH=0x6; 4MHz: T_ADSH=0x3.	0xC

FLS_CODE_PROT: Address(0x048)				
Bit	Symbol	R/W	Description	Default
31:0	FLS_CODE_PROT	RW	Write 0x91827364 to enable flash read protection function. 0: The flash read protection function is enabled; 1: The flash read protection function is disabled	0

BOR_CFG: Address(0x04C)				
Bit	Symbol	R/W	Description	Default
31:2	Reserved	RO	Not used	0
1	FBOR_BOR_VALID	RW	This register is valid when FBOR_EN is set to 1. 0: Disable sudden power failure protection function 1: Enable sudden power failure protection function	0
0	FBOR_EN	RW	0: Disable power down protection circuit 1: Enable power down protection circuit	0

BOR_STATE: Address(0x054)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	FBOR_BOR	RW	Unexpected power failure indicator, this bit is written 1 to clear 0 0: No unexpected power failure 1: Unexpected power failure	0

TIMER1/ TIMER2

Overview

TIMER1 and TIMER2 both contain a 32-bit counter that can be used as basic timers to provide timing functionality to the system.

Features

- 32-bit counter, working in the system clock domain.
- Support interrupt control functions, including interrupt generation, interrupt clearing, and interrupt masking.
- When the timer is working, TimerLoadCount changes. It will only be updated by the timer when it reaches 0 or when it is restarted. Otherwise, the timer will continue to decrease until it reaches 0 before updating TimerLoadCount.

Functional Description

1) Start the TIMER Clock

The enable and disable of TIMER1 and TIMER2 clocks can be achieved through RCCM.CLKENR register.

2) Configure TIMER loading value

The TIMER reload value can be configured through the TIMERx.TimerLoaderCount register.

3) Configure TIMER interrupt

TIMER interrupts are enabled and masked by the TIMERx.TimerControlReg register.

4) Start TIMER interrupt

Enable the TIMER global interrupt and configure the appropriate interrupt priority according to the application.

5) Start the TIMER

TIMER enable and disable can be configured by the `TIMERx.TimerControlReg` register.

6) TIMER interrupt generating

When the TIMER is enabled, the counter starts counting down from the value configured in the `TIMERx.TimerLoaderCount` register. When the count is decreased to 0, the TIMER interrupt is generated, and the counter value is restored to the value configured in the `TIMERx.TimerLoaderCount` register, and the counting down starts again.

7) TIMER interrupt clearing

After the TIMER interrupt is generated, the register `TIMERx.TimerEOI` needs to be written to clear the TIMER interrupt state.

8) Reconfigure the TIMER count value

During the TIMER counting process, the register `TIMERx.TimerLoadCount` can be configured at any time to update the load count value. At this time, the original counting process is not interrupted. When the original counting process is decremented to 0, the updated load count value is returned to continue decrementing.

9) Disable the TIMER

The `TIMERx.TimerControlReg` register can be configured to disable the TIMER at any time during TIMER working.

Usage Restrictions

- TimerLoadCount must be set before starting `timer_en`. Timer must be disabled and then enabled again if TimerLoadCount is modified.
- The TimerLoadCount time interval cannot be set to `0x1~0xF`, which is a relatively small value. The set time should be more than 1ms, `TimerLoadCount>0x3FF`.

Register List

Register Mapping

`TIMER1_BASE` : `0x40004100`

`TIMER2_BASE` : `0x40004200`

TIMER register:

Offset	Register Name	Description	Reset Value
0x00	TimerLoadCount	Counter.	0xFFFFFFFF
0x08	TimerControlReg	Control.	0
0x0C	TimerEOI	Write 1 Clear Interrupt Status.	0
0x10	TimerIntStat	Interrupt status.	0

Register Detailed Description

RO: Read only, W: Write only, RW: Read/Write, WC: Write clear

TimerLoadCount: Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:0	TimerLoadCount	RW	Timer loading value, which is loaded automatically when the Timer starts or when the count decrements to 0 in user-defined mode.	0xFFFFFFFF

TimerControlReg: Address(0x08)				
Bit	Symbol	R/W	Description	Default
31:3	Reserved	RO	Not used	0
2	TimerIntMsk	RW	Timer interrupt mask 0: Disable 1: Enable	0
1	Reserved	RO	Not used	0
0	TimerEn	RW	Timer enable 0: Disabled 1: Enable	0

TimerEOI: Address(0x0C)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	TimerIntclr	WC	Write 1 Clear Interrupt Status. 1: Enable	0

TimerIntStat: Address(0x10)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	TimerIntstate	RO	Timer interrupt status register 1: There is an interrupt generated 0: There is no interrupt generated	0

RCCM

Overview

The reset and Clock controller module (RCCM) is used to generate the reset and clock signals required for each module. In addition, the controller also provides reset source query and system reset functions.

Features

- Providing clocks of TIM1, TIM2, and WDT
- Providing reset of TIM1, TIM2, and WDT
- Support reset source queries
- Support system reset

Register List

Register Mapping

RCCM_BASE : 0x40004400

Offset	Register Name	Description	Reset Value
0x00	RCCM_CLKENR	Clock enable register	0
0x04	RCCM_RSTR	Reset register	0
0x08	RCCM_RSTCTRL	Reset control register	0x2

Register Detailed Description

RO: Read only, W: Write only, RW: Read/Write

clock enable register (RCCM_CLKENR): Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:5	Reserved	RO	Not used	0
4	TIM1EN	RW	TIM1 clock enabled 0: Disable 1: Enable	0
3	TIM2EN	RW	TIM2 clock enabled 0: Disable 1: Enable	0
2:1	Reserved	RO	Not used	0
0	WDTEN	RW	WDT clock enabled 0: Disable 1: Enable	0

reset register (RCCM_RSTR): Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:5	Reserved	RO	Not used	0
4	TIM1RST	RW	TIM1 reset 0: Release 1: Reset TIM1	0
3	TIM2RST	RW	TIM2 reset 0: Release 1: Reset TIM2	0
2:1	Reserved	RO	Not used	0
0	WDRST	RW	WDT reset 0: Release 1: Reset WDT	0

reset ctrl register (RCCM_RSTCTRL): Address(0x08)				
Bit	Symbol	R/W	Description	Default
31:4	Reserved	RO	Not used	0
3:1	RSTSRC	RW	System reset source 001: Default state, power on reset 010: WDT reset 011: CPU software reset 100: RCCM software reset	0x1
0	SFREQ	WO	System reset request 0: Disable 1: Enable	0

WDT

Overview

Watchdog Timer (WDT) can be used to detect and resolve faults caused by software errors; When the counter reaches the given timeout value, it triggers an interrupt or generates a system reset. The WDT is used to prevent system lock caused by device or program conflicts in SOC.

Features

- 32 bits WDT count, operating in the system clock domain.
- The count decreases from the initial value to 0 when a timeout occurs.
- If a timeout occurs, it can be configured to reset the system directly by WDT or to generate an interrupt. If the interrupt is not cleared before the second timeout occurs, the system will be reset.
- Configurable timeout period.

Functional Description

Timeout

The WDT timeout can be configured by the WDT_TORR register. The minimum and maximum configurable timeout for WDT at different system clock frequencies are as follows:

System clock	2MHz	4MHz	8MHz	16MHz
Minimum timeout	64ms	32ms	16ms	8ms
Maximum timeout	32768ms	16384ms	8192ms	4096ms

Interrupt and reset

When WDT_CR [1] is set to 1, if the first timeout occurs, a WDT interrupt will be generated, and the counter will return to the corresponding count value of WDT_TORR and continue to count down. If the second timeout occurs and the WDT interrupt has not been cleared, the system will be reset.

When WDT_CR [1] is set to 0, a timeout is set. After the watchdog starts, the counter begins to decrease. When the counter reaches 0, a system reset is generated.

Write 1 to register WDT_EOI to clear the WDT interrupt signal.

Configuration flow

1) Enable WDT clock

The WDT clock can be enabled and disabled by RCCM.CLKENR register.

2) Configure WDT timeout output mode

The WDT timeout output mode can be configured by WDT.WDT_CR register.

3) Configure timeout period

The WDT timeout can be configured by WDT.WDT_TORR register.

4) Enable WDT interrupt

WDT interruption can be configured by WDT.WDT_CR register.

5) Enable WDT

WDT can be enabled by WDT.WDT_CR register.

6) Feed the dog regularly

When the watchdog is enabled, it is necessary to feed the watchdog within the configured timeout period by writing 0x76 to the WDT.WDT_CRR register and restarting the watchdog counter.

Register List**Register Mapping**

WDT_BASE : 0x40004000

Offset	Register Name	Description	Reset Value
0x00	WDT_CR	WDT control register	0
0x04	WDT_TORR	Timeout setting register	0
0x0C	WDT_CRR	Count restart register	0
0x10	WDT_STAT	Interrupt status register	0
0x14	WDT_EOI	Interrupt clear register	0

Register Detailed Description

RO: Read only, W: Write only, RW: Read/Write

WDT_CR: Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:2	Reserved	RO	Not used	0
1	RMOD	RW	Select timeout output response 0: WDT timeout system reset 1: WDT timeout system into interrupt	0
0	WDT_EN	RW	WDT enabled. 0: Diasble 1: Enable	0

WDT_TORR: Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:4	Reserved	RO	Not used	0
3:0	TOP	RW	Select timeout: The available value range for 32-bit WDT is 2^{17} to $2^{(17+i)}$. Where $i=TOP$ (0-15)	0

WDT_CRR: Address(0x0C)				
Bit	Symbol	R/W	Description	Default
31:8	Reserved	W	Not used	0
7:0	CntRestart	W	Write 0x76 restart count	0

WDT_STAT: Address(0x10)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	IntrStat	RO	Interrupt status register 1: There is an interrupt generated 0: There is no interrupt generated	0

WDT_EOI: Address(0x14)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	IntrClr	RW	Clear interrupt flag 1:WDT Clear Interrupt Flag	0

RCC

Overview

Reset and clock controller (RCC) is used to manage the system's reset and clock, and output the state of the reset and clock.

Features

- Supports reset source queries and clear operations
- Support ON/OFF and status check of clock source
- Supports 1, 2, 4, and 8 frequency division of the system clock
- Support glitch-free switching of system clock and status query of system clock

Functional Description

RESET

Reset can be divided into three categories: power reset, system reset, and peripheral reset.

- Power on reset:

When the chip is powered on normally, it will generate a power on reset, which will reset all registers.

- System reset:

The system reset all registers to their default values, except for the registers specifically designated (including SYSDIV bit of RCC_CR register, PMU_ACR register, PMU_BORCR register, PMU BORDEG register, PMU_OTMCR register, PMU_OTFRR register, PMU_SMR register, LINM_PHY_ANR register, LINL_PHY_ANR register, AUTO_ADDRESS_EN bit and AUTO_ADDRESS_AUTOOFF and PU30K_AUTOOFF_EN bits of LINS_PHY_CR register, SYS-FWSR0 register). When the following events occur, a system reset generates:

- LDO3V3 undervoltage event occurs and reset action is selected
- VBAT overvoltage event occurs and reset action is selected
- VBAT undervoltage event occurs and reset action is selected
- Over temperature protection event occurs and reset action is selected
- Window watchdog count terminated
- Set the SOFTRSTREQ bit of the RCC_CSR register

The reset source can be confirmed by querying the reset flag (RCC_CSR register). Users can clear all reset flags.

- Peripherals Reset:

The software can reset GPIO, LIN master, LIN slave, ADC, or LED_CTRL separately by configuring the peripheral reset register (RCC_PRSTR register).

CLOCK TREE

- Clock source:

AW23004 has two built-in RC OSC clock source:

- 16MHz High Frequency RC oscillator, the output OSC16M_CLK
- 256kHz Low Frequency RC oscillator, the output OSC256K_CLK

The 16MHz RC OSC can be enabled and disabled by the HFON bit of the RCC_CR register. When enabled, until the HFRDY bit (located in the RCC_CR register) is 1, it indicates that OSC16M_CLK is ready.

The 256kHz RC OSC is always enabled and cannot be closed. LFRDY indicates whether OSC256K_CLK is ready.

- System clock:

System clock options:

- OSC16M_CLK
- LF16K_CLK is 16-divided by OSC256K_CLK

When OSC16M_CLK is selected as the system clock source, the SYSDIV bit of the RCC_CR register is used to divide the system clock.

- SSC spread spectrum:

Spread spectrum clock (SSC) is used to reduce the electromagnetic interference generated by the high-speed clock OSC16M_CLK.

Register List

Register Detailed Description

RCC_BASE : 0x50000000

RO: Read only, W: Write only, RW: Read/Write

Clock control register (RCC_CR): Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:10	Reserved	RO	Not used	0
9	LFRDY	RO	Low frequency clock ready flag. 0: Low frequency clock not ready 1: Low frequency clock ready	1
8:6	Reserved	RO	Not used	0
5:4	SYSDIV	RW	High frequency clock division. 00: No divided 01: DIV2 10: DIV4 11: DIV8	0x2
3:2	Reserved	RO	Not used	0
1	HFRDY	RO	High frequency clock ready flag. 0: High frequency clock not ready 1: High frequency clock ready	1
0	HFON	RW	High frequency clock enable. 0: Disable 1: Enable	1

Clock configuration register (RCC_CFGR): Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:2	Reserved	RO	Not used	0
1	SWS	RO	system clock switch status. 0: LFCLK used as system clock 1: HFCLK used as system clock	1
0	SW	RW	system clock switch. 0: LFCLK selected as system clock 1: HFCLK selected as system clock	1

Peripheral reset register (RCC_PRSTR): Address(0x0C)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	WO	Not used	0
5	ADCRST	WO	ADC reset. 0: No effect 1: Reset ADC	0
4	LEDCTRLRST	WO	LED reset. 0: No effect 1: Reset LED	0
3	LINMRST	WO	LINM reset. 0: No effect 1: Reset LINM	0

Peripheral reset register (RCC_PRSTR): Address(0x0C)				
2	LINSRST	WO	LINS reset. 0: No effect 1: Reset LINS	0
1	Reserved	RO	Not Used	0
0	GPIORST	WO	GPIO reset. 0: No effect 1: Reset GPIO	0

Peripheral clock enable register (RCC_PENR): Address(0x18)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	ADCEN	RW	ADC clock enable control. 0: Disable 1: Enable	0
4	LEDCTRLLEN	RW	LED clock enable control. 0: Disable 1: Enable	0
3	LINMEN	RW	LINM clock enable control. 0: Disable 1: Enable	0
2	LINSEN	RW	LINS clock enable control. 0: Disable 1: Enable	0
1	Reserved	RO	Not Used	0
0	GPIOEN	RW	GPIO clock enable control. 0: Disable 1: Enable	0

Control status register (RCC_CSR): Address(0x24)				
Bit	Symbol	R/W	Description	Default
31:18	Reserved	RO	Not used	0
17	UVRSTF	RO	VBAT undervoltage reset flag 0: No VBAT undervoltage reset occurred 1: VBAT undervoltage reset occurred	0
16	OVRSTF	RO	VBAT overvoltage reset flag 0: No VBAT overvoltage reset occurred 1: VBAT overvoltage reset occurred	0
15	OTPRSTF	RO	Over temperature protection reset flag. 0: No over temperature reset occurred 1: Over temperature reset occurred	0
14	WDGRSTF	RO	WWDG reset flag.	0

			0: No WWDG reset occurred 1: WWDG reset occurred	
13	SOFTTRSTF	RO	Soft reset flag. 0: No software reset occurred 1: Software reset occurred	0
12	BOR3V3RSTF	RO	BOR3V3 reset flag. 0: No BOR3V3 reset occurred 1: BOR3V3 reset occurred	0
11	Reserved	RO	Not used	0
10	POR3V3RSTF	RO	POR3V3 reset flag. 0: No POR3V3 reset occurred 1: POR3V3 reset occurred	1
9	Reserve	RO	Not Used	0
8	CLRf	WO	Remove reset flags. 0: No effect 1: Clear reset flags	0
7:6	Reserved	RO	Not Used	0
5	SOFTTRSTREQ	WO	Soft reset request. 0: No effect 1: Force a soft reset on the device	0
4:0	Reserved	RO	Not used	0

High-frequency OSC SSC register (RCC_SSCR): Address(0x40)				
Bit	Symbol	R/W	Description	Default
31:15	Reserved	RO	Not used	0
14	SSCEN	RW	SSC enable. 0: Disable SSC 1: Enable SSC	0
13	Reserved	RO	Not Used	0
12:8	SSCAMP	RW	SSC amplitude.	0
7:0	SSCDIV	RW	SSC clock divider. $\text{Freq_ssc} = \text{freq_sys} / [(\text{SSC_DIV} + 1) * (\text{SSCAMP} + 1) * 4]$	0x28

PMU

Overview

The Power management unit (PMU) converts the input power VBAT into 3.3V and 1.5V power supplies for internal circuits, and monitors the 3.3V and 1.5V power supplies. AW23004 provides flexible options to deal with power outages and prevent them from abnormal chip operation.

Features

- Low power management.

- Integrated POR and BOR can prevent chip abnormalities caused by power supply anomalies.
- Support VBAT voltage monitoring, reset or report to CPU when undervoltage and overvoltage are generated.
- Over temperature protection.
- Support safe mode, prevent chip failure from affecting other chips.

Functional Description

Power supply

The VBAT operating voltage is 6V~18V, AW23004 has 2 built-in LDOs. LDO3V3 normally open, can not be closed. LDO1V5 has two different states depending on the chip operation mode:

- When AW23004 is in RUN mode, LDO1V5 is in working state.
- When AW23004 is in SLEEP mode, LDO1V5 can be disabled.

Security monitoring

- VBAT monitoring

AW23004 has built-in VBAT overvoltage monitor (VBAT OV monitor) and VBAT undervoltage monitor (VBAT UV Monitor) to monitor whether the voltage on the VBAT is above or below the threshold voltage set by user. After detecting an overvoltage or an undervoltage event, user can choose reset, interrupt, or no action.

- Power-on Reset (POR) and Brown-out Reset (BOR)

➤ POR3V3:

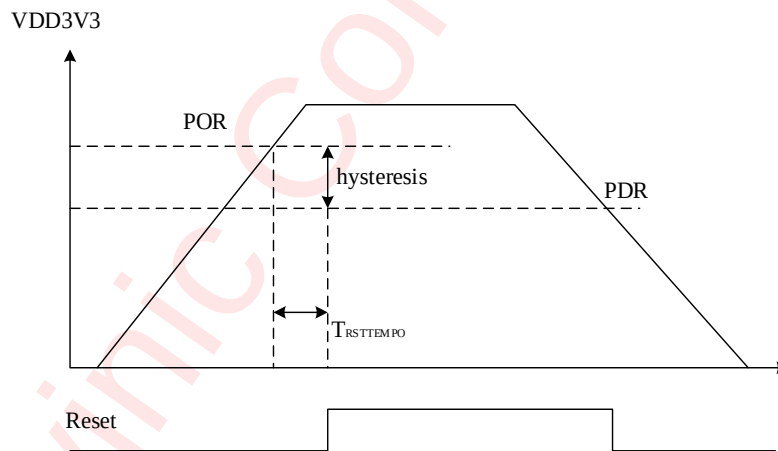


Figure 7 POR waveform

When VDD3V3 is lower than the voltage detection threshold, the system is kept in the reset state to prevent abnormal chip operation in low voltage. Refer to the ELECTRICAL CHARACTERISTICS for details of POR and BOR.

➤ BOR3V3:

AW23004 has built-in Brown-out detection circuit BOR3V3 to detect whether VDD3V3 is below the set voltage threshold. The user can choose reset, interrupt, or no action.

- Over-temperature monitoring:

The OverTemp monitor monitors whether the chip temperature is above a set temperature threshold to prevent the chip from operating at abnormal temperatures. The user can choose reset, interrupt, or no action.

Low power mode

After power reset or system reset, the chip works in RUN mode. In this mode, OSC RC 16MHz is selected as

the system clock source, and the power consumption can be reduced in RUN mode in the following ways:

- Reduce the system clock
- Disable the clock of unused interfaces
- Disable the CPU clock

When the CPU does not need to continue to execute the command, it can stop the CPU clock by the WFI or WFE command to save power consumption.

Sleep mode

AW23004 can enter the sleep mode, and the power consumption of the chip is the lowest in this operating mode. Execute the following order to enter sleep mode:

- 1) Disable the ADC measurement
- 2) Disable the LED driver
- 3) Disable the temperature sensor
- 4) Configure GPIO as wake-up source if necessary
- 5) Configure the wake-up timer as the wake-up source if necessary
- 6) Configure the sleep mode register of PMU
- 7) CPU executes WFI and enters CPU sleep mode

Exit Sleep mode

Before sending a sleep mode request, it is necessary to ensure that at least one wake-up source is enabled, otherwise only LIN activity or POR can wake the chip from sleep mode.

After the chip wakes up from sleep mode, the software startup process is the same as the power on startup process. Sleep mode exit can be achieved through three different wake-up sources:

- When the LIN bus is at an explicit level and the time exceeds the specified value in the specification (WKUP-REC_THREE), and then switches to an implicit level, a wake-up event is immediately generated. If the sleep mode is initiated by a LIN to ground short circuit and the short circuit is subsequently eliminated, LIN will be immediately awakened. In practical applications, parallel capacitors can be reserved on the LIN bus to reduce interference on the LIN path.
- When a rising or falling edge event of GPIO is detected, a wake-up event will be immediately generated.
- By configuring the wake-up timer inside the chip, a wake-up event will be immediately generated when the preset time is reached.

Safe mode

Safe mode is a state in which the chip's functionality fails, in which the chip cannot get LIN communication or effectively control the LED. To prevent this chip from affecting other chips, all GPIO are suspended in this state. When WDTRSTEN is valid and the WWDG count exceeds the limit, the internal WDTRSTCNT count will increase by 1. When the chip is working properly, after WWDG reset, the CPU will set the WDTRSTCNTCLR bit and clear the WDTRSTCNT count value. If the chip malfunctions, WDTRSTCNT will continuously accumulate until it reaches the set threshold, at which point the chip will enter safe mode.

Specifically, if LIN_SW_ON is set to 1, the LIN Switch function is available. Unless powered on and reset, the safe mode cannot be exited.

Register List

Register Detailed Description

PMU_BASE: 0x50000100

RO: Read only, W: Write only, RW: Read/Write

Control register (PMU_CR): Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:17	Reserved	RO	Not used	0
16	DWP	RW	DWP = Enable Write Access of BORCFGR, OTMCR, VBATMCR 0: Disable DWP 1: Enable DWP	0
15:9	Reserved	RO	Not Used	0
8	CWUF	WO	Clear All Wakeup Flags 0: No effect 1: Clear All Wakeup Flag	0
7:5	Reserved	RO	Not Used	0
4	CSF	WO	Clear Sleep Flag 0: No effect 1: Clear Sleep Flag	0
3	PDS	RW	Power down LDO1V5 during SLEEP mode 0: LDO1V5 Power-on During Sleep Mode 1: LDO1V5 Power-down During Sleep Mode	0
2	Reserved	RO	Not Used	0
1	HFINIT	RW	Default value is 1, Select HFCLK/LFCLK as system clock after wakeup from sleep mode 0: Select LFCLK as system clock after wakeup from sleep mode 1: Select HFCLK as system clock after wakeup from sleep mode	1
0	SLEEP	WO	Goto Sleep Mode 0: No effect 1: Prepare to Enter Sleep Mode	0

Status register (PMU_SR): Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:12	Reserved	RO	Not used	0
11	LINSWUF	RO	LINS Wakeup Flag 0: No LINS Wakeup Event Occurred 1: LINS Wakeup Event Occurred	0
10	Reserved	RO	Not Used	0
9	TIMWUF	RO	Wakeup Timer Flag 0: No WAKEUP_TIMER Event Occurred 1: WAKEUP_TIMER Event Occurred	0
8	GPIOWUF	RO	GPIO Wakeup Flag 0: No GPIO Wakeup Event Occurred 1: GPIO Wakeup Event Occurred	0
7:5	Reserved	RO	Not Used	0
4	SF	RO	Sleep Flag 0: No Sleep Occurred	0

			1: Sleep Occurred	
3:0	Reserved	RO	Not used	0

Analog control register(PMU_ACR): Address(0x0C)				
Bit	Symbol	R/W	Description	Default
31:9	Reserved	RO	Not used	0
8	IBIASEN	RW	IBIAS Enable 0: Disable IBIAS 1: Enable IBIAS	0
7	Reserved	RO	Not Used	0
6	BORVSEL	RW	BOR Reference Voltage Select 0: Select GPIO5 Analog Input Voltage as BOR Reference Voltage 1: Select BG Output Voltage as BOR Reference Voltage	1
5	Reserved	RO	Not Used	0
4	BUFEN	RW	BG Buffer Enable 0: Disable BG Buffer 1: Enable BG Buffer	0
3	Reserved	RO	Not Used	0
2	TSEN	RW	Tempearture Sensor Enable 0: Disable Tempearture Sensor 1: Enable Tempearture Sensor	0
1:0	Reserved	RO	Not used	0

BOR control register(PMU_BORCR): Address(0x10)				
Bit	Symbol	R/W	Description	Default
31:8	Reserved	RO	Not used	0
7:4	BOR3V3LS	RW	BOR3V3 Threshold Level Selection 0000: 2.021V 0001: 2.076V 0010: 2.134V 0011: 2.194V 0100: 2.259V 0101: 2.327V 0110: 2.4V 0111: 2.477V 1000: 2.56V 1001: 2.648V 1010: 2.742V 1011: 2.844V 1100: 2.953V 1101: 3.071V 1110: 3.199V	0xB
3:2	BOR3V3ACTSEL	RW	BOR3V3 Action Selection 00: No Action	1

			01: Interrupt Generated 10: System Reset 11: No Action	
1	Reserved	RO	Not Used	0
0	BOR3V3EN	RW	BOR3V3 Enable 0: Disable BOR3V3 1: Enable BOR3V3	0

BOR deglitch register(PMU_BORDEG): Address(0x14)				
Bit	Symbol	R/W	Description	Default
31:16	Reserved	RO	Not used	0
15:11	BOR3V3NEGTHRES	RW	BOR3V3 Negative Edge Deglitch Threshold When the BOR3V3 output signal changes from 1 to 0, if the output signal keeps (BOR3V3NEGTHRES+1) continuous clock cycle (clock is 256kHz) low level, the output signal is considered as low level.	1
10:8	Reserved	RO	Not used	0
7:3	BOR3V3POSTHRES	RW	BOR3V3 Positive Edge Deglitch Threshold When the BOR3V3 output signal changes from 0 to 1, if the output signal keeps a high level (BOR3V3POSTHRES+1) clock cycle (clock is 256kHz) continuously, the output signal is considered to be high level.	0x1F
2	Reserved	RO	Not used	0
1	BOR3V3DBNC	RO	Debounced BOR3V3 Signal Output 0:BOR3V3 Signal Low after Debounced 1:BOR3V3 Signal High after Debounced	0
0	BOR3V3DEGEN	RW	BOR3V3 Deglitch Enable 0:Disable BOR3V3 Deglitch 1:Enable BOR3V3 Deglitch Note: The filter filter clock frequency is 256kHz	0

Over temperature monitor control register(PMU_OTMCR): Address(0x20)				
Bit	Symbol	R/W	Description	Default
31:8	Reserved	RO	Not used	0
7:4	OTLS	RW	OVTEMP Monitor Level Selection 0000: 90°C 0001: 95°C 0010: 100°C 0011: 105°C 0100: 110°C 0101: 115°C 0110: 120°C 0111: 125°C	0xb

			1000: 130°C 1001: 135°C 1010: 140°C 1011: 145°C 1100: 150°C 1101: 155°C 1110: 160°C 1111: 165°C	
3:2	OTACTSEL	RW	Over Temperature Action 00: No Action 01: Interrupt Generated 10: System Reset 11: No Action	0
1	Reserved	RO	Not used	0
0	OTE	RW	Over Temperature Monitor Enable 0: Disable 1: Enable	0

VBAT monitor control register(PMU_VBATMCR): Address(0x30)				
Bit	Symbol	R/W	Description	Default
31:28	Reserved	RO	Not used	0
27:24	OVLS	RW	Battery Over Voltage Monitor Level Selection 0000: 20.06V 0001: 21.26V 0010: 22.58V 0011: 23.78V 0100: 25.02V 0101: 26.30V 0110: 27.54V 0111: 28.78V 1000: 30.02V 1001: 31.30V 1010: 32.46V 1011: 33.74V 1100: 35.10V 1101: 36.30V 1110: 37.58V 1111: 38.82V	0x4
23:22	Reserved	RO	Not used	0
21:20	OVHYS	RW	Battery Over Voltage Monitor Hysteresis Selection 00: 42mV 01: 0.714V 10: 1.344V 11: 1.624V	0x1
19	OVACTSEL	RW	Battery Over Voltage Action 0: No Action	0

			1: System Reset	
18:17	Reserved	RO	Not Used	0
16	OVE	RW	Battery Over Voltage Monitor Enable 0: Disable Battery Over Voltage Monitor 1: Enable Battery Over Voltage Monitor	0
15:13	Reserved	RO	Not used	0
12:8	UVLS	RW	Battery Under Voltage Monitor Level Selection 00000: 4.026V 00001: 4.124V 00010: 4.22V 00011: 4.332V 00100: 4.444V 00101: 4.64V 00110: 4.684V 00111: 4.82V 01000: 4.956V 01001: 5.1V 01010: 5.26V 01011: 5.428V 01100: 5.556V 01101: 5.7V 01110: 5.844V 01111: 5.996V 10000: 6.18V 10001: 6.356V 10010: 6.532V 10011: 6.724V 10100: 6.932V 10101: 7.148V 10110: 7.3V 10111: 7.46V 11000: 7.62V 11001: 7.796V 11010: 7.98V 11011: 8.164V 11100: 8.364V 11101: 8.572V 11110: 8.796V 11111: 9.028V	0x9
7:6	Reserved	RO	Not used	0
5:4	UVHYS	RW	Battery Under Voltage Monitor Hysteresis Selection 00: 16mV 01: 136mV 10: 232mV 11: 328mV	0x1
3	UVACTSEL	RW	Battery Under Voltage Action 0: No Action 1: System Reset	0

2:1	Reserved	RO	Not Used	0
0	UVE	RW	Battery Under Voltage Monitor Enable 0:Disable Battery Under Voltage Monitor 1:Enable Battery Under Voltage Monitor	0

VBAT OV debounce control register(PMU_VBATOVDCCR): Address(0x34)				
Bit	Symbol	R/W	Description	Default
31	OVDE	RW	Over Voltage Monitor Signal Debouncer Enable 0:Disable Over Voltage Signal Debouncer 1:Enable Over Voltage Signal Debouncer	1
30	OVDBNC	RO	Debounced Battery Over Voltage Monitor Output 0:Over Voltage Signal Low after Debounced 1:Over Voltage Signal High after Debounced	0
29:25	Reserved	RO	Not used	0
24	OVSTRB1CLK	RW	Clock Frequency Strobling 1 Select for Debouncing 0:Select High Frequency Clock for Debouncing 1:Select Low Frequency Clock for Debouncing	0
23:16	OVTHTRES1	RW	Over Voltage Debouncing Threshold for 0to1 Transition When the overvoltage signal changes from 0 to 1, the overvoltage signal is considered valid if the overvoltage signal is kept high for (OVTHTRES1+1) consecutive clock cycles (the clock is selected by OVSTRB1CLK)	0x1
15:9	Reserved	RO	Not used	0
8	OVSTRB0CLK	RW	Low Frequency Strobling 0 Select for Debouncing 0:Select High Frequency Clock for Debouncing 1:Select Low Frequency Clock for Debouncing	1
7:0	OVTHTRES0	RW	Over Voltage Debouncing Threshold for 1to0 Transition When the overvoltage signal changes from 1 to 0, the overvoltage signal is considered valid if the overvoltage signal keeps a high level for (OVTHTRES0+1) consecutive clock cycles (the clock is selected by OVSTRB0CLK)	0xFF

VBAT UV debounce control register(PMU_VBATUVDCR): Address(0x38)				
Bit	Symbol	R/W	Description	Default
31	UVDE	RW	Under Voltage Monitor Signal Debouncer Enable 0:Disable Under Voltage Signal Debouncer 1:Enable Under Voltage Signal Debouncer	1
30	UVDBNC	RO	Debounced Battery Under Voltage Monitor Output 0:Under Voltage Signal Low after Debounced 1:Under Voltage Signal High after Debounced	0
29:25	Reserved	RO	Not Used	0
24	UVSTRB1CLK	RW	Low Frequency Strobling 1 Select for Debouncing 0:Select High Frequency Clock for Debouncing	0

			1:Select Low Frequency Clock for Debouncing	
23:16	UVTHRES1	RW	Under Voltage Debouncing Threshold for 0 to 1 Transition Configured by software. When the undervoltage signal changes from 0 to 1, it is considered effective if the undervoltage signal keeps high level for (VTHRES1+1) consecutive clock cycles (the clock is selected by UVSTRB1CLK)	1
15:9	Reserved	RO	Not used	0
8	UVSTRB0CLK	RW	Low Frequency Strobing 0 Select for Debouncing 0:Select High Frequency Clock for Debouncing 1:Select Low Frequency Clock for Debouncing	1
7:0	UVTHRES0	RW	Under Voltage Debouncing Threshold for 1 to 0 Transition When the undervoltage signal changes from 1 to 0, if the undervoltage signal keeps a high level for (VTHRES0+1) consecutive clock cycles (the clock is selected by UVSTRB0CLK), the undervoltage signal is considered effective	0xFF

Interrupt control/status register(PMU_INTCSR): Address(0x40)				
Bit	Symbol	R/W	Description	Default
31:28	Reserved	RO	Not used	0
27	BORC	WO	BOR1V5 and BOR3V3 Interrupt Clear 1:Clear BOR1V5 and BOR3V3 Interrupt Flag	0
26	Reserved	RO	Not Used	0
25	BOR3V3F	RO	BOR3V3 Interrupt Flag 0:No BOR3V3 Interrupt Generated 1:BOR3V3 Interrupt Generated	0
24:20	Reserved	RO	Not used	0
19	OTC	WO	Over Temperature Interrupt Clear 1:Clear Over Temperature Interrupt Flag	0
18:17	Reserved	RO	Not Used	0
16	OTF	RO	Over Temperature Interrupt Flag 0:No Over Temperature Interrupt Generated 1:Over Temperature Interrupt Generated	0
15	OVPOL	RW	Battery Over Voltage Monitor OV Interrupt Polarity 0:Disable Flip Polarity 1:Enable Flip Polarity	0
14:12	Reserved	RO	Not used	0
11	OVC	WO	Over Voltage Interrupt Clear 1:Clear Over Voltage Interrupt Flag	0
10	OVIE	RW	Over Voltage Interrupt Enable 0:Disable Over Voltage Interrupt 1:Enable Over Voltage Interrupt	0
9	Reserved	RO	Not used	0
8	OVF	RO	Over Voltage Interrupt Flag	0

			When the VBAT exceeds the set threshold voltage and the OVIE is valid, the bit is automatically set by the hardware, and the write OVC can clear the bit 0:No Over Voltage Interrupt Generated 1:Over Voltage Interrupt Generated	
7	UVPOL	RW	Battery Under Voltage Monitor OV Interrupt Polarity When the bit is 1, the VBAT undervoltage signal is 0 and the UVIE is 1, the undervoltage interrupt is considered. When this bit is 0, the VBAT undervoltage signal is 1 and the UVIE is 1, the undervoltage interrupt is considered to be generated 0:Disable Flip Polarity 1:Enable Flip Polarity	0
6:4	Reserved	RO	Not used	0
3	UVC	WO	Under Voltage Interrupt Clear 1:Clear Under Voltage Interrupt Flag	0
2	UVIE	RW	Under Voltage Interrupt Enable 0:Disable Under Voltage Interrupt 1:Enable Under Voltage Interrupt	0
1	Reserved	RO	Not used	0
0	UVF	RO	Under Voltage Interrupt Flag When VBAT is below the set threshold voltage and UVIE is valid, the bit is automatically set by the hardware, and the bit can be cleared by writing UVC 0:No Under Voltage Interrupt Generated 1:Under Voltage Interrupt Generated	0

Safe mode register(PMU_SMR): Address(0x60)				
Bit	Symbol	R/W	Description	Default
31:24	SMRPASSWD	WO	Safe Mode Register Password To write a different bit in the safe mode register, the bit should be written to 0x5C. Otherwise invalid This bit is always read out to be 0	0
23:17	Reserved	RO	Not used	0
16	SAFEMODEREQ	RW	If Password is valid, Safe Mode Request 0: No effect 1:Enter Safe Mode	0
15:13	Reserved	RO	Not used	0
12	WDTRSTCNTEN	RW	If Password is valid, Watchdog Reset Counter Enable 0:Disable Watchdog Reset Counter 1:Enable Watchdog Reset Counter	0
11:9	Reserved	RO	Not Used	0
8	WDTRSTCNTCLR	WO	If Password is valid, Watchdog Reset Counter Clear 0: No effect 1:Clear Watchdog Reset Counter	0

7	Reserved	RO	Not Used	0
6:4	WDTRSTCNT	RO	Watchdog Reset Counter Current Value	0x0
3	Reserved	RO	Not Used	0
2:0	WDTRSTTHRES	RW	Watchdog Reset Counter Threshold When Watchdog Reset Counter reaches threshold, the device goes to safe mode	0x5

SYSCTRL

Overview

The SYSCTRL module is mainly used to store calibration values. These calibration values are used for the adjustment of the simulation part.

Features

- Supports two backup registers
- Support calibration register configuration

Functional Description

Back up register

This module contains two firmware scratches SYS_FWSR0 and SYS_FWSR1. SYS_FWSR0 is not subject to various software and hardware reset, only by power down reset control; SYS_FWSR1 can be reset by various software and hardware.

TRIM write configuration

To configure TRIM, follow the following process:

- 1) Enable TRIM write mode and write 0xE to SYS_TRIMENR;
- 2) Write TRIM values to the corresponding TRIM registers;
- 3) Disable TRIM write mode and write 0x0 to SYS_TRIMENR;
- 4) To latch the value of the TRIM register, write 0x10 to SYS_TRIMENR.

Register List

Register Mapping

SYSCTRL_BASE : 0x50000900

Offset	Register Name	Description	Reset Value
0x00	SYS_FWSR0	firmware scratch register0.	0x00
0x04	SYS_FWSR1	firmware scratch register1.	0x00
0x08	SYS_TRIMENR	trim enable register.	0x00
0x0c	SYS_TRIMSTR	trim status register.	0x00
0x10	SYS_PMUBGTRIMR	pmu bg trim register.	0x00
0x14	SYS_PMUIBIASTRIMR	pmu bias trim register.	0x00
0x1c	SYS_PMULDO1V5TRIMR	pmu ldo 1.5V trim register.	0x00
0x20	SYS_PMULDO3V3TRIMR	pmu ldo 3.3V trim register.	0x00

0x24	SYS_PMUILEDTRIMR	PMU ILED TRIM register.	0x00
0x28	SYS_PMUVFWBIASTRIMR	PMU VFW BIAS TRIM register.	0x00
0x30	SYS_OSC256KTRIMR	low frequent osc trim register.	0x80
0x34	SYS_OSC16MTRIMR	high frequent osc trim register.	0x00
0x40	SYS_LEDBR0TRIMR	led br register. step 120uA	0x00
0x44	SYS_LEDBR1TRIMR	led br register. step 120uA	0x00
0x48	SYS_LEDBR2TRIMR	led br register. step 120uA	0x00
0x50	SYS_LEDVFWTRIMR	led vfw detect trim register.	0x00

Register Detailed Description

RO: Read only, W: Write only, RW: Read/Write

SYS_FWSR0: Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:0	FWSR0	RW	Firmware scratch register 0. Only reset at power-on (e.g contents retained in Hibernate mode and retained despite any hard or soft resets).	0x0

SYS_FWSR1: Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:0	FWSR1	RW	Firmware scratch register 1. Only reset at power-on (e.g contents retained in Hibernate mode and retained despite any hard or soft resets).	0x0

SYS_TRIMENR: Address(0x08)				
Bit	Symbol	R/W	Description	Default
31:5	Reserved	RO	Not used	0
4	TRIM_LOCK	RW	Lock. b0:UNLOCK b1:LOCK	0
3:0	TRIM_ACCESS_KEY	RW	Access key. b0000:KEY_NOTCODE b1110:KEY_CODE	0x0

SYS_TRIMSTR: Address(0x0C)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	TRIMSTR	RO	Trim status. b0:Ineffect b1:Effect	0x0

SYS_PMUBGTRIMR: Address(0x10)

Bit	Symbol	R/W	Description	Default
31:5	Reserved	RO	Not used	0
4:0	PMUBG_TRIM	RW	Bandgap trim.	0x0

SYS_PMUIBIASSTRIM: Address(0x14)

Bit	Symbol	R/W	Description	Default
31:5	Reserved	RO	Not used	0
4:0	PMUIBIAS_TRIM	RW	Bias trim.	0x00

SYS_PmulDO1V5TRIMR: Address(0x1C)

Bit	Symbol	R/W	Description	Default
31:4	Reserved	RO	Not used	0
3:0	PMulDO1V5_TRIM	RW	Value.	0x0

SYS_PmulDO3V3TRIMR: Address(0x20)

Bit	Symbol	R/W	Description	Default
31:4	Reserved	RO	Not used	0
3:0	PMulDO3V3_TRIM	RW	Value.	0x0

SYS_PMUILEDTRIMR: Address(0x24)

Bit	Symbol	R/W	Description	Default
31:2	Reserved	RO	Not used	0
1:0	PMUILED_TRIM	RW	IBIAS provides TRIM signal with 30μA current for LED0 to 2	0x0

SYS_PmuVFWBIASSTRIMR: Address(0x28)

Bit	Symbol	R/W	Description	Default
31:2	Reserved	RO	Not used	0
1:0	PMUVFWBIAS_TRIM	RW	The IBIAS provides the TRIM signal of 2.5μA current to the VFW	0x0

SYS_OSC256KTRIMR: Address(0x30)

Bit	Symbol	R/W	Description	Default
31:8	Reserved	RO	Not used	0
7:0	OSC256K_TRIM	RW	Low frequency trim.	0x80

SYS_OSC16MTRIMR: Address(0x34)				
Bit	Symbol	R/W	Description	Default
31:8	Reserved	RO	Not used	0
7:0	OSC16M_TRIM	RW	High frequency trim.	0x0

SYS_LEDBR0TRIMR: Address(0x40)				
Bit	Symbol	R/W	Description	Default
31:9	Reserved	RO	Not used	0
8:0	LEDBR0_TRIM	RW	LEDBR trim, 120μA per step.	0x0

SYS_LEDBR1TRIMR: Address(0x44)				
Bit	Symbol	R/W	Description	Default
31:9	Reserved	RO	Not used	0
8:0	LEDBR1_TRIM	RW	LEDBR trim, 120μA per step.	0x0

SYS_LEDBR2TRIMR: Address(0x48)				
Bit	Symbol	R/W	Description	Default
31:9	Reserved	RO	Not used	0
8:0	LEDBR2_TRIM	RW	LEDBR trim, 120μA per step.	0x0

SYS_LEDVFWTRIMR: Address(0x50)				
Bit	Symbol	R/W	Description	Default
31:8	Reserved	RO	Not used	0
7:0	VFW_TRIM	RW	Trim value, 10μA per step.	0x0

GPIO

Overview

The GPIO module has a total of 6 general purpose I/O pins. Support pull up and down selection, data input and output direction control function. Each IO port supports dual edge interrupt trigger and clear function. The GPIO module has separate gated clock, reset for the entire module with separate clock and reset.

Features

- 6 programmable input/output interfaces.
- Each I/O port supports weak pull-up and weak pull-down operations.
- Data input and output direction control.
- Each I/O port supports dual edge triggering, clearing, and status querying of interrupts.

Functional Description

I/O functions

GPIO can control the direction of data input and output for each IO by input enable and output enable.

Input function: Configure the corresponding port to GPIO mode by port reuse, enable the input of the port, and read the level status of each IO port by the GPIO_IDR register.

Output function: Configure the corresponding port to GPIO mode by port reuse, enable the output of the port, and configure the output data of each port by the GPIO_ODR register.

Weak pull-up/down function

Port reuse is used to configure the corresponding port to GPIO mode. By enabling the weak pull up or weak pull down of the port, users can achieve a weak pull up or weak pull down operation for each IO port. The weak pull up and weak pull down enable control signals of each IO port are independent of each other, and users can configure the weak pull up and weak pull down operation of any IO according to the actual use situation.

Wakeup function in sleep mode

Once the port is configured into GPIO mode by port multiplexing, it goes into sleep mode, and any level change of the GPIO port will generate a wakeup event, which wakes up the whole system.

After the GPIO interrupt is enabled, the rising edge and falling edge of the port can be enabled according to the actual application requirements. Event wakeup is triggered when the port produces the expected level change.

The configurations of each IO are independent of each other, as are the rising edge enablement and falling edge enablement of each IO.

Triggering and clearing interrupts

The port is multiplexed into GPIO mode to enable gated clock and input enable. The interrupt enable, rising edge enable, or falling edge enable of a port triggers an interrupt when the port produces the expected level change. The interrupt source can be queried by reading the interrupt status register GPIO_IRQPR. Each interrupt generated by an IO port can be cleared by writing 1 to the bit corresponding to the interrupt status register port separately.

Configure flow

GPIO input function configuration

- Enable the GPIO clock:

The GPIO clock can be enabled and disabled by the RCC.RCC_PENR register.

- Multiplexing to GPIO mode:

The mode of a port can be configured by the AFIO.AFIO_MFPR register.

- Enable input:

The input enable for ports GPIO0 to GPIO5 can be configured by the GPIO.GPIO_IBER register.

- Configure pull-down:

Pull-down resistors for ports GPIO0 to GPIO5 can be configured by the GPIO.GPIO_PUPDR register.

- Get the input pin status:

The level status of the input pin can be obtained by reading the GPIO.GPIO_IDR register.

GPIO output function configuration

- Enable the GPIO clock:

The GPIO clock can be enabled and disabled by the RCC.RCC_PENR register.

- Multiplexing to GPIO mode:

The mode of a port can be configured by the AFIO.AFIO_MFPR register.

- Output enable:

The output enable from ports GPIO0 to GPIO5 can be configured by the GPIO.GPIO_OBER register

- Configure the output data:

Output data from ports GPIO0 to GPIO5 can be configured by the GPIO.GPIO_ODR register.

GPIO interrupt configuration

- Enable the GPIO clock:

The GPIO clock can be enabled and disabled by the RCC.RCC_PENR register.

- Multiplexing to GPIO mode:

The mode of a port can be configured by the AFIO.AFIO_MFPR register.

- Enable input

The input enable for ports GPIO0 to GPIO5 can be configured by the GPIO.GPIO_IBER register.

- Enable GPIO edge detection:

Falling edge detection for ports GPIO0 to GPIO5 enables configuration by the GPIO.GPIO_FTSR register.

Rising edge detection for ports GPIO0 to GPIO5 enables configuration by the GPIO.GPIO_RTSR register.

- Enable GPIO port interrupt:

The interrupt enable on ports GPIO0 to GPIO5 is configured by the GPIO.GPIO_IRQENR register.

- Get the GPIO interrupt status:

A GPIO interrupt is triggered when the port level status of a port configured for GPIO interrupt mode changes as expected. When a GPIO interrupt is triggered, the interrupt status of the port can be obtained by reading the GPIO.GPIO_IRQPR register.

- Clear the GPIO interrupt:

The interrupt state of a port can be cleared by writing 1 to the corresponding interrupt state register bit.

Register List

Register Mapping

GPIO_BASE: 0x50000A00

Offset	Register Name	Description	Reset Value
0x00	GPIO_IBER	GPIO Input Enable Register	0x00
0x04	GPIO_OBER	GPIO Output Enable Register	0x00
0x08	GPIO_IDR	GPIO Input Data Register	0x00
0x0C	GPIO_ODR	GPIO Output Data Register	0x00
0x10	GPIO_PUPDR	GPIO Pull-Up/Pull-Down Register	0x00
0x14	GPIO_IRQER	GPIO Interrupt Request Enable Register	0x00
0x18	GPIO_FTSR	GPIO Falling Edge Detection Enable Register	0x00
0x1C	GPIO_RTSR	GPIO Rising Edge Detection Enable Register	0x00
0x20	GPIO_IRQPR	GPIO Interrupt Status Register	0x00

Register Detailed Description

RO: Read only, W: Write only, RW: Read/Write, ROW1: Read only, Write 1 clear

GPIO_IBER: Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	IBER5	RW	GPIO5 Input Enable Bit 0: Disable GPIO5 Input 1: Enable GPIO5 Input	0
4	IBER4	RW	GPIO4 Input Enable Bit 0: Disable GPIO4 Input 1: Enable GPIO4 Input	0
3	IBER3	RW	GPIO3 Input Enable Bit 0: Disable GPIO3 Input 1: Enable GPIO3 Input	0
2	IBER2	RW	GPIO2 Input Enable Bit 0: Disable GPIO2 Input 1: Enable GPIO2 Input	0
1	IBER1	RW	GPIO1 Input Enable Bit 0: Disable GPIO1 Input 1: Enable GPIO1 Input	0
0	IBER0	RW	GPIO0 Input Enable Bit 0: Disable GPIO0 Input 1: Enable GPIO0 Input	0

GPIO_OBER: Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	OBER5	RW	GPIO5 Output Enable Bit 0: Disable GPIO5 Output 1: Enable GPIO5 Output	0
4	OBER4	RW	GPIO4 Output Enable Bit 0: Disable GPIO4 Output 1: Enable GPIO4 Output	0
3	OBER3	RW	GPIO3 Output Enable Bit 0: Disable GPIO3 Output 1: Enable GPIO3 Output	0
2	OBER2	RW	GPIO2 Output Enable Bit 0: Disable GPIO2 Output 1: Enable GPIO2 Output	0
1	OBER1	RW	GPIO1 Output Enable Bit 0: Disable GPIO1 Output 1: Enable GPIO1 Output	0
0	OBER0	RW	GPIO0 Output Enable Bit 0: Disable GPIO0 Output 1: Enable GPIO0 Output	0

GPIO_IDR: Address(0x08)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	IDR5	RO	GPIO5 Input Data Bit 0: GPIO5 Input Data Value = 0 1: GPIO5 Input Data Value = 1	0
4	IDR4	RO	GPIO4 Input Data Bit 0: GPIO4 Input Data Value = 0 1: GPIO4 Input Data Value = 1	0
3	IDR3	RO	GPIO3 Input Data Bit 0: GPIO3 Input Data Value = 0 1: GPIO3 Input Data Value = 1	0
2	IDR2	RO	GPIO2 Input Data Bit 0: GPIO2 Input Data Value = 0 1: GPIO2 Input Data Value = 1	0
1	IDR1	RO	GPIO1 Input Data Bit 0: GPIO1 Input Data Value = 0 1: GPIO1 Input Data Value = 1	0
0	IDR0	RO	GPIO0 Input Data Bit 0: GPIO0 Input Data Value = 0 1: GPIO0 Input Data Value = 1	0

GPIO_ODR: Address(0x0C)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	ODR5	RW	GPIO5 Output Data Bit 0: GPIO5 Output Data Value = 0 1: GPIO5 Output Data Value = 1	0
4	ODR4	RW	GPIO4 Output Data Bit 0: GPIO4 Output Data Value = 0 1: GPIO4 Output Data Value = 1	0
3	ODR3	RW	GPIO3 Output Data Bit 0: GPIO3 Output Data Value = 0 1: GPIO3 Output Data Value = 1	0
2	ODR2	RW	GPIO2 Output Data Bit 0: GPIO2 Output Data Value = 0 1: GPIO2 Output Data Value = 1	0
1	ODR1	RW	GPIO1 Output Data Bit 0: GPIO1 Output Data Value = 0 1: GPIO1 Output Data Value = 1	0
0	ODR0	RW	GPIO0 Output Data Bit 0: GPIO0 Output Data Value = 0 1: GPIO0 Output Data Value = 1	0

GPIO_PUPDR: Address(0x10)				
Bit	Symbol	R/W	Description	Default
31:12	Reserved	RO	Not used	0
11:10	PUPDR5	RW	GPIO5 Pull-Up/Pull-Down Control 00: GPIO5 No Pull-Up/Pull-Down 01: GPIO5 Pull-Up Mode 10: GPIO5 Pull-Down Mode 11: Reserved	0
9:8	PUPDR4	RW	GPIO4 Pull-Up/Pull-Down Control 00: GPIO4 No Pull-Up/Pull-Down 01: GPIO4 Pull-Up Mode 10: GPIO4 Pull-Down Mode 11: Reserved	0
7:6	PUPDR3	RW	GPIO3 Pull-Up/Pull-Down Control 00: GPIO3 No Pull-Up/Pull-Down 01: GPIO3 Pull-Up Mode 10: GPIO3 Pull-Down Mode 11: Reserved	0
5:4	PUPDR2	RW	GPIO2 Pull-Up/Pull-Down Control 00: GPIO2 No Pull-Up/Pull-Down 01: GPIO2 Pull-Up Mode 10: GPIO2 Pull-Down Mode 11: Reserved	0
3:2	PUPDR1	RW	GPIO1 Pull-Up/Pull-Down Control 00: GPIO1 No Pull-Up/Pull-Down 01: GPIO1 Pull-Up Mode 10: GPIO1 Pull-Down Mode 11: Reserved	0
1:0	PUPDR0	RW	GPIO0 Pull-Up/Pull-Down Control 00: GPIO0 No Pull-Up/Pull-Down 01: GPIO0 Pull-Up Mode 10: GPIO0 Pull-Down Mode 11: Reserved	0

GPIO_IRQENR: Address(0x14)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	IRQENR5	RW	GPIO5 Interrupt Enable Bit 0: Disable GPIO5 Interrupt 1: Enable GPIO5 Interrupt	0
4	IRQENR4	RW	GPIO4 Interrupt Enable Bit 0: Disable GPIO4 Interrupt 1: Enable GPIO4 Interrupt	0
3	IRQENR3	RW	GPIO3 Interrupt Enable Bit 0: Disable GPIO3 Interrupt	0

			1: Enable GPIO3 Interrupt	
2	IRQENR2	RW	GPIO2 Interrupt Enable Bit 0: Disable GPIO2 Interrupt 1: Enable GPIO2 Interrupt	0
1	IRQENR1	RW	GPIO1 Interrupt Enable Bit 0: Disable GPIO1 Interrupt 1: Enable GPIO1 Interrupt	0
0	IRQENR0	RW	GPIO0 Interrupt Enable Bit 0: Disable GPIO0 Interrupt 1: Enable GPIO0 Interrupt	0

GPIO_FTSR: Address(0x18)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	FTSR5	RW	GPIO5 Falling Edge Detection Enable Bit 0: Disable GPIO5 Falling Edge Detection 1: Enable GPIO5 Falling Edge Detection	0
4	FTSR4	RW	GPIO4 Falling Edge Detection Enable Bit 0: Disable GPIO4 Falling Edge Detection 1: Enable GPIO4 Falling Edge Detection	0
3	FTSR3	RW	GPIO3 Falling Edge Detection Enable Bit 0: Disable GPIO3 Falling Edge Detection 1: Enable GPIO3 Falling Edge Detection	0
2	FTSR2	RW	GPIO2 Falling Edge Detection Enable Bit 0: Disable GPIO2 Falling Edge Detection 1: Enable GPIO2 Falling Edge Detection	0
1	FTSR1	RW	GPIO1 Falling Edge Detection Enable Bit 0: Disable GPIO1 Falling Edge Detection 1: Enable GPIO1 Falling Edge Detection	0
0	FTSR0	RW	GPIO0 Falling Edge Detection Enable Bit 0: Disable GPIO0 Falling Edge Detection 1: Enable GPIO0 Falling Edge Detection	0

GPIO_RTSR: Address(0x1C)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	RTSR5	RW	GPIO5 Rising Edge Detection Enable Bit 0: Disable GPIO5 Rising Edge Detection 1: Enable GPIO5 Rising Edge Detection	0
4	RTSR4	RW	GPIO4 Rising Edge Detection Enable Bit 0: Disable GPIO4 Rising Edge Detection 1: Enable GPIO4 Rising Edge Detection	0

3	RTSR3	RW	GPIO3 Rising Edge Detection Enable Bit 0: Disable GPIO3 Rising Edge Detection 1: Enable GPIO3 Rising Edge Detection	0
2	RTSR2	RW	GPIO2 Rising Edge Detection Enable Bit 0: Disable GPIO2 Rising Edge Detection 1: Enable GPIO2 Rising Edge Detection	0
1	RTSR1	RW	GPIO1 Rising Edge Detection Enable Bit 0: Disable GPIO1 Rising Edge Detection 1: Enable GPIO1 Rising Edge Detection	0
0	RTSR0	RW	GPIO0 Rising Edge Detection Enable Bit 0: Disable GPIO0 Rising Edge Detection 1: Enable GPIO0 Rising Edge Detection	0

GPIO_IRQPR: Address(0x20)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	IRQPR5	RO/W1	GPIO5 Interrupt Status Bit 0: No GPIO5 Interrupt Occurred 1: GPIO5 Interrupt Occurred	0
4	IRQPR4	RO/W1	GPIO4 Interrupt Status Bit 0: No GPIO4 Interrupt Occurred 1: GPIO4 Interrupt Occurred	0
3	IRQPR3	RO/W1	GPIO3 Interrupt Status Bit 0: No GPIO3 Interrupt Occurred 1: GPIO3 Interrupt Occurred	0
2	IRQPR2	RO/W1	GPIO2 Interrupt Status Bit 0: No GPIO2 Interrupt Occurred 1: GPIO2 Interrupt Occurred	0
1	IRQPR1	RO/W1	GPIO1 Interrupt Status Bit 0: No GPIO1 Interrupt Occurred 1: GPIO1 Interrupt Occurred	0
0	IRQPR0	RO/W1	GPIO0 Interrupt Status Bit 0: No GPIO0 Interrupt Occurred 1: GPIO0 Interrupt Occurred	0

AFIO

Overview

The AFIO module contains the multiplexing of each IO individually as well as the selection of PWM channels.

Features

- Multiplexing of common ports.
- Selection of PWM channel.

Functional Description**Multiplexing mode switching**

- Each IO port supports four modes and the mode switching between IO ports is independent of each other.
- The reuse of its ports is as follows:

Port	MFP=3	MFP=2	MFP=1	MFP=0	default
GPIO0	PWM	/	ANA	GPIO0	MFP=0
GPIO1	PWM	/	ANA	GPIO1	MFP=0
GPIO2	PWM	LINS_TXD	ANA	GPIO2	MFP=0
GPIO3	PWM	LINS_RXD	ANA	GPIO3	MFP=0
GPIO4	PWM	LINM_TXD	ANA	GPIO4	MFP=0
GPIO5	PWM	LINM_RXD	ANA	GPIO5	MFP=0

Selection of PWM

Each port of AW23004 can be multiplexed into PWM mode. When the port is multiplexed into PWM mode, each GPIO port can select the PWM channel to be output by the AFIO.AFIO_PWMSEL register, so that all three PWMS can be output from any IO port.

Take GPIO1 as an example, configure MFP register to 0x30 to select PWM output mode. If PWMSEL is chosen to be 0x0, then PWM0 is output from GPIO1 port; If 0x4, PWM1 output from GPIO1 port; If 0x8, PWM2 outputs from GPIO1 port. This is the same for all IO port configurations.

Register List**Register Mapping**

Offset	Register Name	Description	Reset Value
0x00	AFIO_MFPR	GPIO Alternate Function Register	0x00
0x04	AFIO_PWMSELR	PWM Selection Register	0x00

Register Detailed Description

AFIO_BASE : 0x50000800

RO: Read only, W: Write only, RW: Read/Write.

AFIO_MFPR: Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:24	Reserved	RO	Not used	0
23:20	GPIO5_AFR	RW	GPIO5 Alternate Function Bit	0x0
19:16	GPIO4_AFR	RW	GPIO4 Alternate Function Bit	0x0
15:12	GPIO3_AFR	RW	GPIO3 Alternate Function Bit	0x0
11:8	GPIO2_AFR	RW	GPIO2 Alternate Function Bit	0x0
7:4	GPIO1_AFR	RW	GPIO1 Alternate Function Bit	0x0
3:0	GPIO0_AFR	RW	GPIO0 Alternate Function Bit	0x0

AFIO_PWMSELR: Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:12	Reserved	RO	Not used	0
11:10	GPIO5_PWM_SEL	RW	GPIO5 PWM Channel Selection 00: PWM channel0 01: PWM channel1 10: PWM channel2 11: Reserved	0x0
9:8	GPIO4_PWM_SEL	RW	GPIO4 PWM Channel Selection 00: PWM channel0 01: PWM channel1 10: PWM channel2 11: Reserved	0x0
7:6	GPIO3_PWM_SEL	RW	GPIO3 PWM Channel Selection 00: PWM channel0 01: PWM channel1 10: PWM channel2 11: Reserved	0x0
5:4	GPIO2_PWM_SEL	RW	GPIO2 PWM Channel Selection 00: PWM channel0 01: PWM channel1 10: PWM channel2 11: Reserved	0x0
3:2	GPIO1_PWM_SEL	RW	GPIO1 PWM Channel Selection 00: PWM channel0 01: PWM channel1 10: PWM channel2 11: Reserved	0x0
1:0	GPIO0_PWM_SEL	RW	GPIO0 PWM Channel Selection 00: PWM channel0 01: PWM channel1 10: PWM channel2 11: Reserved	0x0

LED_CTRL

Features

- 4 channels constant current sink LED drive, 60mA maximum output current
- Each channel independent 9bit brightness control, STEP=120μA
- The resolution of PWM can be adjusted up to 16bit
- Support 4-channel PWM modulation
- The PWM frequency ranges from 80 Hz to 250Hz
- The PWM clock is derived from the system clock and supports 1/2/4/8/16/64/256/1024 frequency division
- Support LED forward guide on voltage detection, LED voltage drop detection 0 V~8 V configurable

- The configuration characteristics of the rise threshold PRISE and fall threshold PFALL are as follows.
 - $PRISE < PFALL$, corresponding to PWM output duty cycle $PWM_DUTY = (PFALL - PRISE) / PERIOD$
 - $PRISE = 0$ and $PFALL = PERIOD$, corresponding to 100% duty cycle of PWM output
 - $PRISE \geq PFALL$, which corresponds to 0% duty cycle of PWM output

Functional Description

LED drive current configuration

AW23004 has three independent high-precision LED driver modules, and the current variation range is 0~60mA with 120μA step. The reference current of the LED driver module is provided by LED IBIAS. The LED IBIAS module is calibrated at the factory, and the calibration value is stored in the built-in FLASH, which is loaded into the PMUIBIAS_TRIM register (which is located in the SYSCTRL module) after the program is started. The maximum current of LEDx is calculated by:

$$I_{LEDx}(max) = LEDBRx_TRIM * 120\mu A$$

Where $x=0,1,2,3$ and LEDBRx_TRIM is the register configuration entry (located in the SYSCTRL module).

The current of LEDx is calculated by:

$$I_{LEDx} = I_{LEDx}(max) * PWM_DUTY = LEDBRx_TRIM * 120\mu A * PWM_DUTY$$

Where PWM_DUTY is the duty cycle of the input PWM wave, see PWM section for details.

The LED driver module configuration steps are as follows:

- 1) BUFEN set and wait for 50μs (BUFEN is located in the ACR register of the PMU module);
- 2) IBIASEN is set to enable LED IBIAS module (IBIASEN is located in the ACR register of PMU module);
- 3) Set EN_LEDx_BIAS to enable LEDx BIAS. Configure LEDBRx_TRIM to control the maximum current of LEDx.
- 4) PWM related registers are configured and LED_EN is set to generate PWM waveform and control the current of LEDx.

PWM control

The counting clock of the PWM is obtained by the system clock frequency division. User can configure the PWMFRQ register to flexibly select the clock frequency.

After the LEDBRx_TRIM configuration is completed, the current of each LED can be controlled by adjusting the PWM duty cycle. The PWM duty cycle depends on the configuration of three registers: PERIOD, PFALL and PRISE, which can be calculated by:

$$PWM_DUTY = \frac{PFALL - PRISE}{PERIOD}$$

Where the value of PERIOD should be greater than 2, and the value of PFALL should be no less than the value of PRISE, otherwise the waveform of PWM may not meet the expectation.

The frequency division coefficient, count period, rise threshold, fall threshold, and reverse phase configuration terms are allowed to be modified during operation. In order to enable multi-channel LED parameters to be configured simultaneously and prevent PWM waveform mutation, these values are updated at the end of the current count. By continuously configuring the registers and adjusting the waveform of the PWM, user controls the current of LEDx and obtains different LED effects.

LED forward voltage detection

The configuration steps of LED forward voltage detection are as follows:

- 1) BUFEN set and wait for 50μs (BUFEN is located in the ACR register of the PMU module);
- 2) IBIASEN is set to enable LED IBIAS module (IBIASEN is located in the ACR register of PMU module);
- 3) Set EN_VFW_BIAS to enable VFW BIAS module.
- 4) Select the appropriate GAIN value, and then set EN_VFW_DECT to enable the detection module.

Register Detailed Description

LED_CTRL_BASE : 0x50000400

RO: Read only, W: Write only, RW: Read/Write.

Pwm Control register (PWM_CR0): Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:16	Reserved	RO	Not used	0
15:14	PWMFORCE3	RW	PWM3 force enable bit[1]: PWM3 enable 0: Diasble 1: Enable bit[0]: PWM3 output 0: LOW 1: HIGH	0
13:12	PWMFORCE2	RW	PWM2 force enable bit[1]: PWM2 enable 0: Diasble 1: Enable bit[0]: PWM2 output 0: LOW 1: HIGH	0
11:10	PWMFORCE1	RW	PWM1 force enable bit[1]: PWM1 enable 0: Diasble 1: Enable bit[0]: PWM1 output 0: LOW 1: HIGH	0
9:8	PWMFORCE0	RW	PWM0 force enable bit[1]: PWM0 enable 0: Diasble 1: Enable bit[0]: PWM0 output 0: LOW 1: HIGH	0
7	EN_LED	RW	LED enable 0: Diasble 1: Enable	0
6:3	INVERT	RW	PWM invert INVERT[0]: PWM_OUT0 invert enable 0: Diasble 1: Enable INVERT[1]: PWM_OUT1 invert enable 0: Diasble 1: Enable INVERT[2]: PWM_OUT2 invert enable 0: Diasble	0

			1: Enable INVERT[3]: PWM_OUT3 invert enable 0: Diasble 1: Enable	
2:0	PWMFRQ	RW	PWM Clock frequency 000: DIV1 001: DIV2 010: DIV4 011: DIV8 100: DIV16 101: DIV64 110: DIV256 111: DIV1024	0

Pwm Control register (PWM_CR1): Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:16	Reserved	RO	Not used	0
15:0	PERIOD	RW	Maximum count value of PWM	0

Pwm Update register (PWM_PUR): Address(0x08)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	UPDATE	RW	LED parameter update enable 0: Diasble 1: Enable	0

Pwm Count register (PWM_PCR): Address(0x0C)				
Bit	Symbol	R/W	Description	Default
31:16	Reserved	RO	Not used	0
15:0	PWMCNT	RO	PWM count value	0

Threshold control register(PWM_THR0): Address(0x10)				
Bit	Symbol	R/W	Description	Default
31:16	PRISE0	RW	LED0 rise threshold selection	0
15:0	PFALL0	RW	LED0 descent threshold selection	0

Threshold control register(PWM_THR1): Address(0x14)				
Bit	Symbol	R/W	Description	Default
31:16	PRISE1	RW	LED1 rise threshold selection	0
15:0	PFALL1	RW	LED1 descent threshold selection	0

Threshold control register(PWM_THR2): Address(0x18)

Bit	Symbol	R/W	Description	Default
31:16	PRISE2	RW	LED2 rise threshold selection	0
15:0	PFALL2	RW	LED2 descent threshold selection	0

Threshold control register(PWM_THR3): Address(0x1C)

Bit	Symbol	R/W	Description	Default
31:16	PRISE3	RW	LED3 rise threshold selection	0
15:0	PFALL3	RW	LED3 descent threshold selection	0

Led control register(LED_LCR): Address(0x20)

Bit	Symbol	R/W	Description	Default
31:7	Reserved	RO	Not used	0
6	EN_LED3_BIAS	RW	LED3 bias enable 0: Diasble 1: Enable	0
5	EN_LED2_BIAS	RW	LED2 bias enable 0: Diasble 1: Enable	0
4	EN_LED1_BIAS	RW	LED1 bias enable 0: Diasble 1: Enable	0
3	EN_LED0_BIAS	RW	LED0 bias enable 0: Diasble 1: Enable	0
2:1	SRF	RW	Drop rate adjustment of LED DRIVER Note: 00 is the fastest speed	0
0	SRR	RW	LED DRIVER rise rate adjustment Note: 0 is the fastest rate	0

Vfw control register(VFW_VCR0): Address(0x24)

Bit	Symbol	R/W	Description	Default
31:3	Reserved	RO	Not used	0
2	EN_VFW_DECT	RW	VFW current sensing enable 0: Diasble 1: Enable	0
1	EN_VFW_BIAS	RW	VFW bias enabled 0: Diasble 1: Enable	0
0	GAIN	RW	VFW gain selection enabled 0: 1/4	0

			1: 1/8	
--	--	--	--------	--

Vfw control register(VFW_VCR1): Address(0x28)				
Bit	Symbol	R/W	Description	Default
31:2	Reserved	RO	Not used	0
1	VFW_PWM_FPLS_EN	RW	At PWM low level, the VFW test current is enabled 0: Diasble 1: Enable	1
0	VFW_PWM_RPLS_EN	RW	At PWM high level, VFW test current enabled 0: Diasble 1: Enable	0

Vfw test register(VFW_VTR0): Address(0x2C)				
Bit	Symbol	R/W	Description	Default
31:0	VFW_TEST_EN	RW	Write 32'h33445566 into test mode, other values exit test mode, VFW test mode state 0: Non-VFW test mode 1: VFW test mode	0

Vfw test register(VFW_VTR1): Address(0x30)				
Bit	Symbol	R/W	Description	Default
31:4	Reserved	RO	Not used	0
3	VFW_TEST_CURRENT_EN	RW	In VFW test mode, the VFW current is enabled 0: Disable the enable 1: Turn on the enable	1
2	VFW_TEST_DECT_PULSE_N	RW	In VFW test mode, VFW detection is enabled 0: Turn on the enable 1: Disable the enable	0
1:0	VFW_TEST_SEL_LED	RW	When VFW_TEST_EN is active, the VFW current is selected to enable the LED channel 00: Select LED0 01: Select LED1 10: Select LED2 11: Reserved	0

ADC

Features

- 12bit precision analog ADC

- Single input
- Analog channel support
 - 1/32 VBAT
 - GPIO0~5
 - LED0~2
 - VDD1V5
 - VREF
 - Temperature sensor
- Digital channel supports analog channel free mapping, and supports up to 4 digital channels continuous scanning
- Support internal interface (PWM) trigger scan action, and software trigger scan action
- Support single-channel interrupt and multi-channel interrupt
- Support multiple scan modes, including single scan, continuous scan, cycle scan

Functional Description

Source of trigger

- Software trigger
- The falling edge, rising edge or double edge of PWMx (0~2) can be selected as the trigger source

Scan mode

Single scan mode: Trigger ADC scan SEQ_LEN ADC channels. After the scanning action is completed, the ADC channel will not be scanned even if the trigger signal is generated again. The following registers are configured to enter single-scan mode: TRIG_MODE in ADC_CR is set to 1, and TRIG_VALID in ADC_CR is set to 1.

Continuous scan mode: Trigger ADC scan SEQ_LEN ADC channels. The SEQ_LEN ADC channels will rescan if the trigger signal is generated again. The following registers are configured to enter continuous scan mode: TRIG_MODE in ADC_CR is set to 0, and TRIG_VALID in ADC_CR is set to 1.

Cyclic scan mode: Trigger ADC scan SEQ_LEN ADC channels. After scanning, SEQ_LEN ADC channels are rescanned. The following registers are configured to enter the cyclic scan mode: CONT is set to 1 in ADC_CR and TRIG_VALID is set to 1 in ADC_CR.

Sampling time configuration

To collect different analog signals, different sampling times need to be configured, as shown in the following table.

Analog signal	Sampling time/ μ s
Chip voltage	8 μ s
Chip temperature	8 μ s
GPIO0~5	8 μ s
LED0~2	32 μ s
VDD1P5	8 μ s
VREF	8 μ s

When the system clock is configured to 16M and CH0 takes the led voltage, STUP_DLY should be configured to 0xFF and SAMPLE to 0xFF. When the led voltage is collected without CH0, it is necessary to configure CHANNEL_DLY as 0xFF and SAMPLE as 0xFF.

Analog quantity calculation

1) Power supply voltage calculation

$$VBAT = \frac{\text{code} * VREF * 32}{4096}$$

Where VREF is selected by VREF_SEL in ADC_CR.

2) Junction voltage calculation of LED

$$VFW = \frac{\text{code} * VREF * \text{Gain}}{4096}$$

Where VREF is selected by VREF_SEL in ADC_CR, Gain is selected by VFW_VCR0_b.GAIN in LED_CTRL, if the LED junction voltage is 0~4.8V, GAIN is selected by 4, if the LED junction voltage is 0~9.6V, GAIN is selected by 8.

3) Chip temperature calculation

$$Vtemp = \frac{\text{code} * VREF}{4096}$$

VREF is selected by VREF_SEL in ADC_CR, and the coefficient of Vtemp converted to temperature is 0.44643°C/mV. For example, if the voltage collected to the temperature sensor at room temperature 25°C is Vtemp_type, the chip temperature Tchip under the temperature sensor voltage VtempT is:

$$Tchip = 0.44643 * (VtempT - Vtemp_type) + 25$$

4) Other

$$V = \frac{\text{code} * VREF}{4096}$$

VREF is selected by VREF_SEL in ADC_CR.

Operating mode

The operating mode of the ADC is shown in the following figure. The PWM falling edge is selected as the trigger source of the ADC operation in the register setting. The number of scanned channels is chosen to be 3. When the PWM falling edge comes, the ADC will scan CH0/1/2 in turn, and the analog channels mapped by CHx can be freely combined, for example CH0 selects 1/32 VBAT, CH1 selects LED1, and CH2 selects temperature sensor.

After the PWM falling edge comes, after a TTRIG_DLY+TSTUP_DLY delay, the CH0 channel starts scanning. The setup time of scanning is controlled by the CHx_SMPL register, and the specific time is configured according to the sampling time. After the establishment time of CHx_SMPL, the ADC starts to convert the data, which requires 13 ADC_CLK cycles, in which the ADC_CLK cycle is controlled by the CONV_CLK_DIV frequency division coefficient. After the conversion is complete, TCHANNEL_DLY starts the next channel conversion.

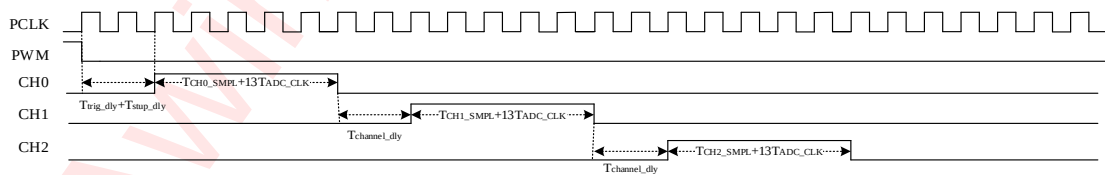


Figure 8 An example diagram of the ADC operating mode

Register List

Register Detailed Description

ADC_CTRL_BASE : 0x50000700

RO: Read only, W: Write only, RW: Read/Write.

ADC_SR: Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:3	Reserved	RO	Not used	0
2	START	RW	ADC start working status 0: The ADC can be started 1: The ADC is working	0
1	EOSEQ	RW	ADC end of sequence scan process 0: Scan in progress 1: The scan is complete	0
0	EOC	RW	ADC end of channel scan process 0: Scan in progress 1: The scan is complete	0

ADC_CR: Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:22	Reserved	RO	Not used	0
21:20	VREF_SEL	RW	ADC reference voltage select 0x0: Select VBG as VREF 0x1: Select 2*VBG as VREF 0x2: Select VDD 3.3V as VREF	0x1
19	CONT	RW	ADC continuous scan mode 0: adc stop when sequence scan is over 1: adc will start from first channel again when sequence is over	0
18:16	CONV_CLK_DIV	RW	clock divider of sysclk for analog-ADC 000: div by 4 011: div by 8 100: div by 16 101: div by 32 110: div by 64 111: div by 128	0x0
15	TRIG_MODE	RW	ADC trigger valid once select 0: adc trigger will always be valid 1: adc trigger will be invalid when conversion is done	0
14	TRIG_VALID	RW	ADC trigger valid enable bit 0: adc trigger is invalid 1: adc trigger is valid	1
13:12	PWM_SEL	RW	ADC PWM trigger select 00: trigger by PWM0 01: trigger by PWM1 10: trigger by PWM2 11: trigger by PWM3	0x0
11:9	EXT_SEL	RW	ADC trigger select 000: trigger by posedge of pwm signal	0x7

			001: trigger by negedge of pwm signal 010: trigger by both edge of pwm signal 111: trigger by software	
8	SW_TRIG	RW	ADC software trigger When EXT_SEL[2:0] is 3'b111 0: The software trigger signal cannot trigger the ADC scan 1: The software trigger signal can trigger the ADC scan	0
7:2	Reserved	RO	Not used	0
1	EOSEQIE	RW	ADC end of sequence interrupt enable 0: Disable 1: Enable	0
0	EOCIE	RW	ADC end of channel interrupt enable 0: Disable 1: Enable	0

ADC_DLYR: Address(0x08)				
Bit	Symbol	R/W	Description	Default
31:24	Reserved	RO	Not used	0
23:16	TRIG_DLY	RW	ADC start delay when trigger happens delay time = $T_{fclk} \times (TRIG_DELAY + 2)$	0x10
15:8	CHANNEL_DLY	RW	ADC channel delay when scan channel switch from one to another delay time = $T_{fclk} \times (CHANNEL_DLY + 4)$	0x00
7:0	STUP_DLY	RW	ADC start up delay time before sample phase delay time = $T_{fclk} \times (STUP_DLY + 2)$	0x10

ADC_SMPR: Address(0x0C)				
Bit	Symbol	R/W	Description	Default
31:24	CH3_SMPL	RW	ADC channel 3 sampling time configuration sample time = $T_{fclk} \times (CHx_SMPL + 1)$	0x0
23:16	CH2_SMPL	RW	ADC channel 2 sampling time configuration sample time = $T_{fclk} \times (CHx_SMPL + 1)$	0x0
15:8	CH1_SMPL	RW	ADC channel 1 sampling time configuration sample time = $T_{fclk} \times (CHx_SMPL + 1)$	0x0
7:0	CH0_SMPL	RW	ADC channel 0 sampling time configuration sample time = $T_{fclk} \times (CHx_SMPL + 1)$	0x0

ADC_SQR1: Address(0x10)				
Bit	Symbol	R/W	Description	Default
31:2	Reserved	RO	Not used	0
1:0	SEQ_LEN	RW	ADC scan sequence length	0x0

			00: ONE_CHANNEL 01: TWO_CHANNELS 10: THREE_CHANNELS 11: FOUR_CHANNELS	
--	--	--	--	--

ADC_SQR2: Address(0x14)				
Bit	Symbol	R/W	Description	Default
31:16	Reserved	RO	Not used	0
15:12	CH3_SEL	RW	ADC scan channel selection, refer to CH0_SEL	0x0
11:8	CH2_SEL	RW	ADC scan channel selection, refer to CH0_SEL	0x0
7:4	CH1_SEL	RW	ADC scan channel selection, refer to CH0_SEL	0x0
3:0	CH0_SEL	RW	ADC scan channel select 0000: Reserved 0001: 1/32*VBAT 0010: temp sensor 0011: GPIO0 0100: GPIO1 0101: GPIO2 0110: GPIO3 0111: GPIO4 1000: GPIO5 1001: VREF 1010: VDD1V5 1011: VDD3V3 1100: VFW_LED0 1101: VFW_LED1 1110: VFW_LED2 1111: Reserved	0x0

ADC_DR1: Address(0x18)				
Bit	Symbol	R/W	Description	Default
31:28	Reserved	RO	Not used	0
27:16	ADC_DATA1	RO	ADC channel 1 conversion data	0x0
15:12	Reserved	RO	Not Used	0
11:0	ADC_DATA0	RO	ADC channel 0 conversion data	0x0

ADC_DR2: Address(0x1C)				
Bit	Symbol	R/W	Description	Default
31:28	Reserved	RO	Not used	0
27:16	ADC_DATA3	RO	ADC channel 3 conversion data	0x0
15:12	Reserved	RO	Not Used	0
11:0	ADC_DATA2	RO	ADC channel 2 conversion data	0x0

LIN Bus

LIN bus integrates LIN_PHY and LIN_CONTROLLER to realize LIN communication. x standard, adaptive baud rate, 1-20KB/s transceiver rate, maximum support 115200b/s one-way receiving rate. Supports LIN automatic addressing.

Features

- Compatible with LIN2.x and SAE J2602 standards
- Support for automatic addressing
- Support adaptive baud rate, rate range 1~20kb/s, maximum support 115200b/s receiving rate
- Support wake-up detection in low power mode
- Multiple timeout detection mechanism and hardware circuit protection function
- Supports multiple frame format error detection mechanisms
- Configurable protocol frame length

Functional Description

LIN_PHY

LIN_PHY integrates RX module and TX module to convert high voltage signal of LIN port into low voltage digital signal to LIN controller. The delay and other related timing requirements of the digital signal output by the LIN_PHY meet the ISO17987 specification.

RXD filter

In order to prevent the electromagnetic pulse interference to LIN bus in industrial environment or other application environment, DIG_PHY integrates a digital filter driven by the system clock.

The high level filter and low level filter support free configuration, which facilitates the user's flexible choice in different application environments.

Baud rate

The slave supports adaptive baud rate function, and users can receive protocol frames from the host without configuring baud rate in advance. Depending on the system clock frequency, the slave can maximally support 115200b/s one-way reception or 1-20kb /s two-way transmission.

Frame length and validation

The slave supports protocol frames with a data length of 0 to 8 bytes configured by the LIN_CR1.DATA_LENGTH register. But when the register is configured as 4'b1111, the data segment length of the protocol frame is determined by Bit5 and Bit4 of the received ID field.

ID[5]	ID[4]	Data length
0	0	2
0	1	2
1	0	4
1	1	8

The slave supports both classical and enhanced verification modes.

Low power mode

The slave supports low power mode. After LIN bus timeout, LIN controller will automatically enter the low power mode, LIN_SR.SLEEP is set, and an interrupt notification is sent. The user can configure the chip to enter the low power mode, turn off the analog module or unnecessary digital module, so as to save system power

consumption.

After entering the low-power mode, the LIN controller uses the low-speed clock to detect whether there is a valid wakeup instruction on the LIN bus. After detecting the wake-up command, the chip automatically enters the wake-up process and turns on the high-speed clock and other simulator components.




FIG. 9 Timing diagram of low power consumption of LIN wake-up chip

The wakeup command refers to a dominant level that exceeds the set width of the LIN_TSR.WKUP_REC_THRES register and a valid rising edge to ensure that the wakeup command was issued by the device and not due to a bus grounding error.

Timeout detection

Multiple timeout detection counters are integrated in the LIN controller to detect the timeout of the bus or internal signal, mainly including:

- LIN bus timeout:

The LIN bus is inactive and the explicit or invisible level is held for more than a threshold time (configured by the register LIN_TSR.BUS_TIMEOUT_DET_THRES). The LIN controller detects this timeout state and generates an interrupt. At the same time, the LIN controller monitors the wake-up signal of the LIN bus.

- LIN bus explicit timeout:

The LIN bus is inactive and the dominance level is held for more than a threshold time (configured by the register LIN_TSR.BUS_TIMEOUT_DET_THRES). This means that the LIN bus is very likely to be in the ground state; When the LIN_PHY_CR.PU30K_AUTOOFF_EN register is 1, if the LIN bus is dominant timeout, it will automatically disconnect the connection between the pull-up resistor and the LIN bus to prevent the overshoot of large current from causing damage to the device.

- Wake-up response timeout:

When the LIN host is sleeping, the LIN controller can control the bus to initiate a wake-up command transmission actively. At the same time, after the wake-up command transmission is completed, the LIN controller starts to detect whether the host is successfully awakened. If the wake-up is successful, the host will initiate a protocol frame transmission. If the controller does not detect a valid protocol frame within a set threshold time (configured by LIN_TSR.WKUP_REPEAT_THRES), wake-up has failed, and an interrupt is generated so that the user can decide whether to wake up again.

- TXD dominant timeout

The TXD data of analog transceiver comes from the internal logic of LIN controller. When LIN_TXD is 0, LIN_IN is 0, and there is valid data transmission on the bus. If LIN_TXD is 0 more than 64ms, it is considered that there is an error in the internal circuit of the controller, at this time, there will be an interrupt, and it is up to the user to decide whether to reset the controller. The transmitter circuit of the analog transceiver will automatically disconnect in the case of TXD timeout to prevent the damage of the device by current overshoot.

Error detection

The LIN controller can detect a variety of errors within the protocol frame or internal logic, including:

- Controller response timeout error

When the controller receives the Header field sent by the host, it first determines the rate of the current frame through the Break-Sync field, and then receives the PID field according to the determined rate and checks whether the checksum in the PID field is wrong. If the receiver is correct, it generates an interrupt to notify the user that the correct frame header has been received. It requires the user to indicate whether the current frame is received or sent, the length and content of the frame data field, and the validation method. Once the user

has determined what to receive or send, the LIN_CR1.DATA_ACK bit is written to inform the controller that the current frame configuration is complete.

Due to the maximum length limit of LIN protocol, after the controller receives the frame header and generates an interrupt, if the host has begun to send data and the first byte of data has been sent before the DATA_ACK configuration, the user has not written DATA_ACK at this time, it is considered that the controller response time is out and the current frame cannot be correctly parsed.

- Frame response timeout error

When the controller receives the Header field from the host, it first determines the current frame rate using the Break-Sync field, and then prepares to receive the PID field and the data field. If the PID field or data field is not received within the maximum length specified by the protocol, a frame response timeout error will be generated.

- Sending and receiving path error

The controller will continuously compare the values of RXD and TXD when sending the protocol frame. If they are not equal at a certain time, it is considered that there is more than one node driving the LIN bus at present, resulting in a sending and receiving path error.

- Frame missing error

When the controller receives the Header field from the host, it first determines the current frame rate using the Break-Sync field, and then prepares to receive the PID field and the data field. If the PID field or data field is not received within the maximum length specified in the protocol, a frame missing error will occur.

- Start/stop bit error

- Testing and error

Automatic addressing

The chip integrates LIN_SW and two LIN buses: LIN_IN and LIN_OUT. LIN_SW is controlled by the register LIN_PHY_CR.AUTO_ADDRESS_EN to link LIN_IN and LIN_OUT together inside the chip for automatic addressing purposes.

Configuration flow

LIN Slave initializes the configuration process

- 1) Start the LIN module clock

The turning on and off of the LIN module clock can be configured by means of the RCC.RCC_PENR register.

- 2) Enable the data sending and receiving function of LIN module

Configure LIN_ANALOG_PHY to enable the data sending and receiving functions of LIN Master module and LIN Slave module.

- 3) Configure LIN interrupts

The interrupt for the LIN Slave module can be configured via the LINS.LIN_IER register.

- 4) Enable the 30kΩ pull-up resistor of the LIN Slave module

The 30kΩ pull-up resistor of the LIN Slave module can be configured via the LINS.LIN_PHY_ANR register.

- 5) Enable automatic addressing function

The automatic addressing of the LIN module can be turned on or off by means of the LINS.LIN_PHY_CR register.

- 6) Configure the LIN bus timeout threshold

The LIN Slave module bus timeout threshold can be configured via the LINS.LIN_TSR register.

- 7) Configure the wake-up signal retransmission interval

The interval at which the wake-up signal is resent can be configured by means of the LINS.LIN_TSR register.

- 8) Configure the LIN Slave to send data monitoring function

The send data monitoring function of the LIN Slave module can be configured through the LINS.LIN_CR2 register.

9) Configure the communication baud rate (adaptive baud rate or adaptive Baud rate)

The LIN Slave module adaptive baud rate function can be configured via the LINS.LIN_CR2 register.

When the adaptive baud rate function of the LIN Slave module is disabled, the fixed baud rate can be configured through the LINS.LIN_RTR register.

LIN Slave data receiving process

The LIN Slave data receiving process is as follows:

1) Generate an interrupt request

Upon receiving the correct ID field, the LIN slave generates an interrupt request to notify the program that a new instruction has been received.

2) Configure the frame orientation

The ID is read, and the instruction is parsed to identify the type of operation for the current frame. When the operation type of the current frame is recognized as receive, the Bit5 of the LINS.LIN_CR1 register needs to be configured to 0 and the frame direction is configured to receive.

3) Configure the length of received data

The received data length is configured in the LINS.LIN_CR1 register.

4) Configure the checksum type of the received data

The type of the received data checksum can be configured via the LINS.LIN_CR1 register.

5) Frame data confirmation

After the frame orientation, the length of the received data, and the checksum type of the received data are configured, the Bit4 of the LINS.LIN_CR1 register needs to be configured to 1 to inform the controller to continue parsing the frame content.

6) Wait for data reception to complete

After the hardware receives the data, it stores the data in the buffer and completes the verification. If the verification data is correct, the receiving data completion interrupt will be generated.

7) Parsing data at the application layer

The application layer reads the received data from the LINS.LIN_DR1 and LINS.LIN_DR2 registers and parses the received data.

LIN Slave data sending process

The LIN Slave data sending process is as follows:

1) Generate an interrupt request

Upon receiving the correct ID field, the LIN slave generates an interrupt request to notify the program that a new instruction has been received.

2) Configure the frame orientation

The ID is read, and the instruction is parsed to identify the type of operation for the current frame. When the operation type of the current frame is recognized as send, the Bit5 of the LINS.LIN_CR1 register needs to be configured to 1 and the frame direction is configured to send.

3) Configure the length of data to be sent

The length of the sent data is configured in the LINS.LIN_CR1 register.

4) Configure the checksum type of the sent data

The type of the received data checksum can be configured via the LINS.LIN_CR1 register.

5) Configure to send data

Write the data to be sent to the LINS.LIN_DR1 and LINS.LIN_DR2 registers.

6) Frame data confirmation

After the frame direction, the length of the data to be sent, the checksum type of the data to be sent, and the data to be sent are configured, the Bit4 of the LINS.LIN_CR1 register needs to be configured to 1 to notify the controller to start the data sending process.

7) Wait for the data to be sent

After the completion of sending data, the sending data completion interrupt will be generated.

LIN Slave sleep and wake up process

When the LIN automatic sleep function is enabled, when there is no activity on the LIN bus and the duration of the dominant or invisible level exceeds the set automatic sleep time, the controller will automatically enter the sleep state.

The LINS.LIN_CR2 register is configured to enable and disable the LIN automatic sleep function.

The duration of the stealth level on the LIN bus can be configured via the LINS.LIN_CR1 register.

When receiving a sleep command sent by the host, the Bit6 of the LINS.LIN_CR1 register can also be configured to 1 to put the controller to sleep.

When the LIN controller is in the sleep state and detects a valid wake-up signal, it will generate a LIN wake-up interrupt. When the LIN wake-up interrupt is generated, the Bit6 of the LINS.LIN_CR1 register needs to be configured to 0 to make the controller exit the sleep state.

Register Detailed Description

LIN_S_BASE : 0x50000500

RO: Read only, W: Write only, RW: Read/Write.

LIN_DR1: Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:24	DATA4	RW	Data Buffer 4. 4th byte of the reponse data	0x0
23:16	DATA3	RW	Data Buffer 3. 3rd byte of the reponse data	0x0
15:8	DATA2	RW	Data Buffer 2. 2nd byte of the reponse data	0x0
7:0	DATA1	RW	Data Buffer 1. 1st byte of the reponse data	0x0

LIN_DR2: Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:24	DATA8	RW	Data Buffer 8. 8th byte of the reponse data	0x0
23:16	DATA7	RW	Data Buffer 7. 7th byte of the reponse data	0x0
15:8	DATA6	RW	Data Buffer 6. 6th byte of the reponse data	0x0
7:0	DATA5	RW	Data Buffer 5. 5th byte of the reponse data	0x0

LIN_IDR: Address(0x08)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5:0	PID	RW	PID Buffer	0x0

LIN_SR: Address(0x0C)				
Bit	Symbol	R/W	Description	Default
31:30	Reserved	RO	Not used	0
29	BUS_TIMEOUT_INT_STATUS	RO	Bus timeout interrupt status.	0
28	TXD_TIMEOUT_INT_STATUS	RO	Txd timeout interrupt status.	0
27:25	Reserved	RO	Not used	0
24	WKUP_INT_STATUS	RO	Wake up receive status.	0
23:20	Reserved	RO	Not used	0
19	TXD_TIMEOUT	RO	Txd timeout status. This bit is set to 1 if the TXD is continuously 0 for more than 64ms, and clear to 0 when the TXD is 1. TXD of LIN_PHY is turned off after TXD timeout	0
18	WKUP_TIMEOUT	RO	Wake up timeout status. This bit is set to 1 and written 1 clear 0 if the frame header is not received within a certain period of time after the controller sends the wake-up signal	0
17	ACK_TIMEOUT	RO	Data Acknowledge timeout status. The frame data confirms the status This bit is set when the user does not acknowledge the frame data after the frame data request is valid and before the first byte of the frame data is received. Write 1 clear.	0
16	RESPONSE_TIMEOUT	RO	None response timeout status. This bit is set when the PID or data area is missing due to the frame. Write 1 clear.	0
15	TXD_ERR_DATA	RO	TXD Compare Error In Data/Start Bit. This bit is set when the controller sends data or when there is an error that TXD is not the same as RXD. Write 1 clear.	0
14	TXD_ERR_STOP	RO	TXD Compare Error In Stop Bit. This bit is set when there is an error that TXD is not the same as RXD when the controller sends the stop bit. Write 1 clear.	0
13	TXD_ERR	RO	Txd Compare Error. This bit is set when LIN_TXD is detected to be	0

			different from LIN_RXD, and a 1 is written to clear a 0. This bit indicates that the LIN bus has multiple nodes sending data at the same time.	
12	FRAME_ERR	RO	Frame Byte Filed Error. This bit is set when the data area is too short or the data area is too long to cause a timeout. Write 1 clear. Note: Too long refers to more than 127 Tbit.	0
11	STARTB_ERR	RO	Start Bit Filed Error. This bit is set if the start bit width is detected to be less than 1Tbit. Write 1 clear.	0
10	PID_ERR	RO	Pid Parity Check Error. This bit is set in the case of PID data verification error. Write 1 clear.	0
9	CHECK_ERR	RO	Checksum Error. This bit is set in the case of frame checksum failure. Write 1 clear.	0
8	STOPB_ERR	RO	Stop Bit Error. This bit is set if the stop bit is detected to be 0. Write 1 clear.	0
7	BUS_ACTIVE	RO	LIN Bus Active Status. This bit is set when a valid frame header is received and reset when the frame is over. This bit can also be cleared by writing the LIN_CR1->PROC_RESET bit	0
6	BUS_TIMEOUT	RO	LIN Bus timeout Status. This bit is set when the LIN bus has been inactive for a certain period of time (LIN_TSR->BUS_TIMEOUT_DET_THRES) and the LIN controller automatically goes to sleep after this bit	0
5	BUS_DOMINANT_TIMEOUT	RO	LIN Bus Dominant timeout Status. This bit is set after the LIN bus has maintained the dominant level for a certain period of time (LIN_TSR->BUS_TIMEOUT_DET_THRES), and the LIN controller will automatically go to sleep after this position	0
4	ABORTED	RO	LIN Core Aborted Status. This bit is set to 1 if the user interrupts the current transmission by writing the LIN_CR1->PROC_RESET bit and is reset to 0 when a valid frame header is detected	0
3	DATA_REQ	RO	Data Request Status. When the frame header is received and the	0

			PID is correct, this bit is set to 1 to inform the controller that a new frame needs to be processed. The controller needs to determine the transmission direction, check type, transmission data, etc. of the current frame according to the PID. After the judgment is completed, the LIN_CR1->DATA_ACK bit is written to inform the controller to continue to receive or send the current frame	
2	WKUP_TX_STATUS	RO	Wake Up Status. This bit is set after the controller starts to send the wake-up signal, and it will automatically clear 0 after the transmission is completed	0
1	TC	RO	End of Transmission Status. This bit is set after the frame is sent, and 0 is cleared after the frame header is received	0
0	FC	RO	End of Frame Status. This bit is set after the frame is sent/received. Write 1 clear.	0

LIN_IER: Address(0x10)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	TXD_TIMEOUT_IER	RW	TXD Timeout Interrupt Enable. 0: Disable 1: Enable	0
4	WKUP_TIMEOUT_IER	RW	Wake-Up Timeout Interrupt Enable. 0: Disable 1: Enable	0
3	TXD_ERR_IER	RW	TXD Compare Error Interrupt Enable. 0: Disable 1: Enable	0
2	BUS_TIMEOUT_IER	RW	Bus Timeout Interrupt Enable. 0: Disable 1: Enable	0
1	DATA_REQ_IER	RW	Data Request Interrupt Enable. 0: Disable 1: Enable	0
0	FC_IER	RW	End of Frame Transmission Interrupt Enable. 0: Disable 1: Enable	0

LIN_CR1: Address(0x14)				
Bit	Symbol	R/W	Description	Default

31:13	Reserved	RO	Not used	0
12	CHEK_SEL	RW	Checksum Select. 0: Classic 1: Enhanced	0
11:8	DATA_LENTH	RW	Data length. PID[5:4] length 2'b00 2 2'b01 2 2'b10 4 2'b11 8	0x0
7	PROC_RESET	RW	Frame Processing Reset. 0: Disable 1: Enable	0
6	SLEEP	RW	Sleep Request. 0: Disable 1: Enable	0
5	FRAME_DIR	RW	Frame Direction Selection. 0: Disable 1: Enable	0
4	DATA_ACK	RW	Data Acknowledge. 0: Disable 1: Enable	0
3:2	Reserved	RO	Not Used	0
1	TRS_WKUP	RW	Transmit WakeUp Request. 0: Disable 1: Enable	0
0	Reserved	RO	Not used	0

LIN_CR2: Address(0x18)				
Bit	Symbol	R/W	Description	Default
31:9	Reserved	RO	Not used	0
8	AUTO_RATE_EN	RW	Auto BaudRate Enable. 0: Disable 1: Enable	1
7:4	Reserved	RO	Not Used	0
3	TXD_ERR_MODE	RW	TXD Compare Err Mode. 0: Disable 1: Enable	0
2	TXD_TIMEOUT_DET_EN	RW	TXD timeout Detect Enable. 0: Disable 1: Enable	1
1	TXD_MONIT_EN	RW	TXD Monitor Compare Enable. 0: Disable	0

			1: Enable	
0	AUTO_SLEEP_EN	RW	Auto Sleep Enable. 0: Disable 1: Enable	1

LIN_RTR: Address(0x1C)				
Bit	Symbol	R/W	Description	Default
31:23	Reserved	RO	Not used	0
22:8	DIVIDER	RW	BaudRate Divider: $f_{clk}=f_{sysclk}/(divider+fraction/256)$	0x3FFF
7:0	FRACTION	RW	Rate Fraction Configuration: $f_{clk}=f_{sysclk}/(divider+fraction/256)$	0x0

LIN_TSR: Address(0x20)				
Bit	Symbol	R/W	Description	Default
31:26	Reserved	RO	Not used	0
25:24	WKUP_LEN	RW	Length of wake-up signal 00: 250μs 01: 500μs 10: 750μs 11: 1000μs	0x1
23:19	Reserved	RO	Not used	0
18:16	INTERBYTE_LEN	RW	Inter-Byte length.	0x0
15:10	Reserved	RO	Not used	0
9:8	BUS_TIMEOUT_DET_THRES	RW	LIN Bus timeout threshold. 00: 4s 01: 6s 10: 8s 11: 10s	0x0
7:2	WKUP_REC_THRES	RW	Wake Up Detected threshold. threshold = $WKUP_THRES * T_{(lf_clk)}$	0x26
1:0	WKUP_REPEAT_THRES	RW	Wake Up Signal re-send threshold. If the controller does not receive a valid frame header within a certain time after sending the wake-up signal, it means that the wake-up has failed and the controller needs to send the wake-up signal again 00: 180ms 01: 200ms 10: 220ms 11: 240ms	0x0

LIN_DR3: Address(0x24)				
Bit	Symbol	R/W	Description	Default

31:9	Reserved	RO	Not used	0
8	SWCHK_EN	RW	Software Checksum Calculate Enable. 0: Disable 1: Enable	0
7:0	DATA9	RW	data9.	0x0

LIN_PHY_ANR: Address(0x80)				
Bit	Symbol	R/W	Description	Default
31:17	Reserved	RO	Not used	0
16	TXD_INVERT_EN	RW	LIN_TXD inversion enabled. 0: When LIN_TXD is 0, LIN sends 0, and when LIN_TXD is 1, LIN sends 1 1: When LIN_TXD is 0, LIN sends 1, and when LIN_TXD is 1, LIN sends 0	1
15:8	Reserved	RO	Not used	0
7	PU30K_EN	RW	The 30K pull-up resistor of the LIN_PHY is enabled	1
6	TX_EN	RW	LIN_PHY TXD enable	0
5	RX_EN	RW	LIN_PHY RXD enable	0
4	TX_RISE_CTRL	RW	LIN_TXD rise slope selection 0: Slow rise 1: Rapid rise	0
3:2	TX_SLOPE	RW	LIN_TXD swing rate	0x0
1:0	TX_BOOST	RW	LIN pull-down drive current	0x0

LIN_PHY_CR: Address(0x84)				
Bit	Symbol	R/W	Description	Default
31:10	Reserved	RO	Not used	0
9	RXD_NEG_FILTER_EN	RW	RXD rising edge filtering enable This bit is used to filter out burrs during RXD0->1, and the width of the burrs to be filtered is controlled by LIN_TSR->RXD_POS_THRES	0
8	RXD_POS_FILTER_EN	RW	RXD falling edge filtering enable This bit is used to filter out burrs during RXD1->0, and the width of the burrs to be filtered is controlled by LIN_TSR->NEG_POS_THRES	0
7:6	Reserved	RO	Not used	0
5	TXD_AUTOOFF_EN	RW	TXD Auto Turnoff Enable. 0: TXD is controlled by LIN_PHY_ANR->TX_EN 1: TXD is shut down automatically	0
4	PU30K_AUTOOFF_EN	RW	PULLUP 30K Resistor Auto Turnoff	1

			When enabled, the 30K pull-up resistor of the LIN_PHY is automatically turned off after the LIN bus dominant level timeout	
3	Reserved	RO	Not used	0
2	AUTO_ADDRESS_AUTOOFF	RW	Auto-Addressing Function Auto Disable. After this position, automatic addressing is automatically turned off in the event of a LIN bus explicit level timeout	1
1	AUTO_ADDRESS_LOCK	RW	Automatic addressing is locked After this position, the auto-addressing register cannot be changed	0
0	AUTO_ADDRESS_EN	RW	Automatic addressing enable	1

LIN_PHY_TSR: Address(0x88)				
Bit	Symbol	R/W	Description	Default
31:16	Reserved	RO	Not used	0
15:8	RXD_NEG_THRES	RW	RXD Negedge Giltch Filter Threshold: $\text{threshold} = (\text{RXD_NEG_THRES} + 2) * T_{\text{sysclk}}$	0x0
7:0	RXD_POS_THRES	RW	RXD Posedge Giltch Filter Threshold: $\text{threshold} = (\text{RXD_POS_THRES} + 2) * T_{\text{sysclk}}$	0x0

LIN_M_BASE : 0x50000600

LIN_PHY_ANR: Address(0x80)				
Bit	Symbol	R/W	Description	Default
31:17	Reserved	RO	Not used	0
16	TXD_INVERT_EN	RW	LIN_TXD inversion enabled. 0: When LIN_TXD is 0, LIN sends 0, and when LIN_TXD is 1, LIN sends 1 1: When LIN_TXD is 0, LIN sends 1, and when LIN_TXD is 1, LIN sends 0	1
15:9	Reserved	RO	Not used	0
8	PU1K_EN	RW	The 1K pull-up resistor of the LIN_PHY is enabled	1
7	PU30K_EN	RW	The 30K pull-up resistor of the LIN_PHY is enabled	0
6	TX_EN	RW	LIN_PHY TXD enable	0
5	RX_EN	RW	LIN_PHY RXD enable	0
4	TX_RISE_CTRL	RW	LIN_TXD rise slope selection 0: Slow rise 1: Rapid rise	0
3:2	TX_SLOPE	RW	LIN_TXD swing rate	0x0
1:0	TX_BOOST	RW	LIN pull-down drive current	0x0

LIN_PHY_CR: Address(0x84)				
Bit	Symbol	R/W	Description	Default
31:6	Reserved	RO	Not used	0
5	TXD_AUTOOFF_EN	RW	TXD Auto Turnoff Enable. After this position, when the chip is in hibernate mode and the LIN bus is invisible, LIN_TXD will be automatically turned off 0: TXD is controlled by LIN_PHY_ANR->TX_EN 1: TXD is shut down automatically	0
4:0	Reserved	RO	Not used	0

WWDG

Overview

Window watchdog (WWDG) is usually used to monitor abnormal late or early operations of applications caused by external interference or unforeseeable logical conditions. Unless the countdown counter is refreshed before reaching 0x40, the watchdog circuit will generate an MCU reset when the preset time period is reached.

Before the countdown counter reaches the window register value, if the countdown counter value is refreshed, an MCU reset will also be generated. This indicates that the countdown counter needs to be refreshed within a limited time window.

Features

- Programmable free running decrement counter.
- Conditional reset:
 - When the value of the decrement counter is less than 0x40, if the watchdog is started, a reset is generated.
 - When the decrement counter is reloaded outside the window, if the watchdog is started, a reset is generated.
- If watchdog is enabled and interrupts are allowed, an Early wake-up interrupt (EWI) is generated when the decrement counter is equal to 0x40, which can be used to reload the counter to avoid a WWDG reset.

Functional Description


Timeout reset function

If the watchdog is enabled (write 1 into WDGA in WWDG_CR), and when the 7-bit decrement counter (T[6:0]) is flipped from 0x40 to 0x3F (T6 bit reset), a reset is produced.

A reset is also generated if the software reloads the counter when the value is greater than the number in the window register.

The timeout reset timing diagram of WWDG is shown as follows:

CNT decrement counter

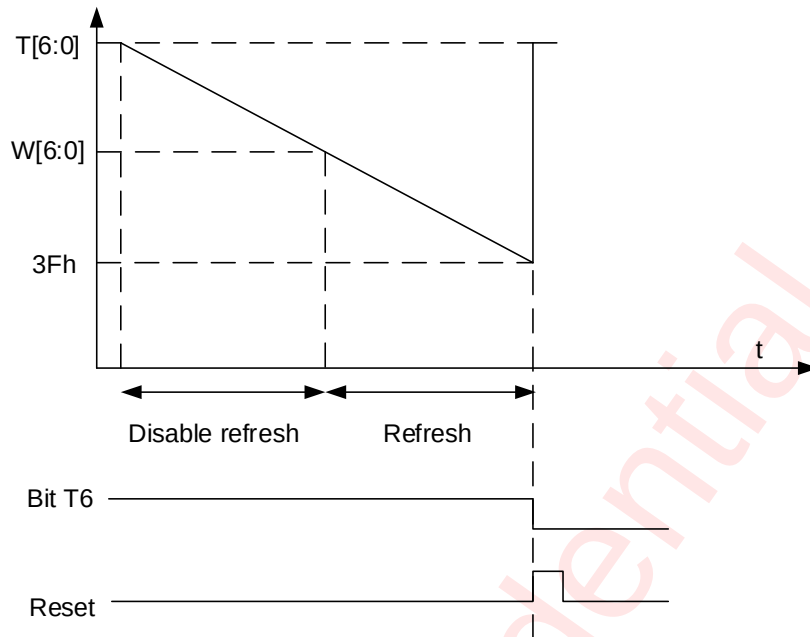**Figure 9 Time-out reset timing diagram of WWDG**

The formula for calculating the timeout is as follows:

$$T_{\text{WWDG}} = T_{\text{fclk}} * 32 * 2^{\text{WDGTB}} * (T[5:0] + 1)$$

Min-max timeout values for fclk=16KHz

WDGTB	Min timeout	Max timeout
0	2ms	128ms
1	4ms	256ms
2	8ms	512ms
3	16ms	1.024s
4	32ms	2.048s
5	64ms	4.096s
6	128ms	8.192s
7	256ms	16.384s

Early wake-up interrupt function

Setting the EWI bit in the WWDG_CFR register can enable the early wake-up interrupt, which is generated when the decrementing counter reaches 0x40. The corresponding interrupt service routine (ISR) can be used to load the counter to prevent WWDG from resetting.

Clear the EWI interrupt by writing '0' to the EWIF bit in the WWDG_SR register.

Register List

Register Mapping

WWDG_BASE : 0x50000300

Offset	Register Name	Description	Reset Value
0x00	WWDG_CR	WWDG Module control register	0x7F

0x04	WWDG_CFR	WWDG configuration register	0x1FF
0x08	WWDG_SR	WWDG status register	0x00

Register Detailed Description

RO: Read only, W: Write only, RW: Read/Write.

WWDG_CR: Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:8	Reserved	RO	Not used	0
7	WDGA	RW	WWDG enable bit 0: Disable 1: Enable	0
6:0	T	RW	7-bit counter	0x7F

WWDG_CFR: Address(0x04)				
Bit	Symbol	R/W	Description	Default
31:11	Reserved	RO	Not used	0
10	EWI	RW	Early Wakeup Interrupt 1: When the counter reaches 0x40, an interrupt is generated. This interrupt can only be cleared by the hardware reset	0
9:7	WDGTB	RW	Time-base prescaler 000: FCLK/32/1, timing period: 2ms, maximum timeout is $2\text{ms} \times (0\text{x}7\text{F}-0\text{x}3\text{F})=128\text{ms}$ 001: FCLK/32/2, timing period: 4ms, maximum timeout is $4\text{ms} \times (0\text{x}7\text{F}-0\text{x}3\text{F})=256\text{ms}$ 010: FCLK/32/4, timing period: 8ms, maximum timeout is $8\text{ms} \times (0\text{x}7\text{F}-0\text{x}3\text{F})=512\text{ms}$ 011: FCLK/32/8, timing period: 16ms, maximum timeout is $16\text{ms} \times (0\text{x}7\text{F}-0\text{x}3\text{F})=1.024\text{s}$ 100: FCLK/32/16, timing period: 32ms, maximum timeout is $32\text{ms} \times (0\text{x}7\text{F}-0\text{x}3\text{F})=2.048\text{s}$ 101: FCLK/32/32, timing period: 64ms, maximum timeout is $64\text{ms} \times (0\text{x}7\text{F}-0\text{x}3\text{F})=4.096\text{s}$ 110: FCLK/32/64, timing period: 128ms, maximum timeout is $128\text{ms} \times (0\text{x}7\text{F}-0\text{x}3\text{F})=8.192\text{s}$ 111: FCLK/32/128, timing period: 256ms, maximum timeout is $256\text{ms} \times (0\text{x}7\text{F}-0\text{x}3\text{F})=16.384\text{s}$	0x3
6:0	W	RW	7-bit window value These bits contain the window value to compare with the decrement counter	0x7F

WWDG_SR: Address(0x08)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	EWIF	RW	early wakeup interrupt flag When the counter value reaches 40h, this bit is set '1' by the hardware. It must be cleared by software writing '0'.	0

WAKEUP_TIMER

Features

- 25-bit counter, operating in 16kHz clock domain.
- Support to wake up the chip from low power mode.
- Support interrupt control function, including interrupt generation, interrupt clearing, and interrupt masking.
- When the timer is working, TimerLoadCount changes. It will only be updated by the timer when it reaches 0 or when it is restarted. Otherwise, the timer will continue to decrease until it reaches 0 before updating TimerLoadCount.

Configuration flow

1) Configure WAKEUP_TIMER loading value

The WAKEUP_TIMER reload value can be configured by the WAKEUP_TIMER.TimerLoaderCount.

2) Configure WAKEUP_TIMER interrupt

The activation and masking of WAKEUP_TIMER interrupts can be configured by the WAKEUP_TIMER.TimerControlReg.

3) Enable WAKEUP_TIMER interrupt

Enable WAKEUP_TIMER global interrupt and set interrupt priority based on application configuration.

4) Start WAKEUP_TIMER

The enable and disable of WAKEUP_TIMER can be configured by the WAKEUP_TIMER.TimerControlReg.

5) WAKEUP_TIMER interrupt generated

When WAKEUP_TIMER is enabled, the counter starts counting down from the value configured by the WAKEUP_TIMER.TimerLoaderCount register. When the count value decreases to 0, a WAKEUP_TIMER interrupt is generated, the counter value returns to WAKEUP_TIMER, and start counting down again based on the value configured in the TimerLoaderCount.

6) WAKEUP_TIMER interrupt clearing

After the WAKEUP_TIMER interrupt is generated, it is necessary to write to the WAKEUP_TIMER.TimerEOI register to clear the WAKEUP_TIMER interrupt status.

7) Reconfigure WAKEUP_TIMER count value

During the counting process of WAKEUP_TIMER, the register WAKEUP_TIMER.TimerLoadCount can be configured at any time to update the load count value. At this time, the original counting process is not interrupted. When the original counting process is decremented to 0, the updated load count value is returned to continue decrementing.

8) Disable WAKEUP_TIMER

During the use of WAKEUP_TIMER, the WAKEUP_TIMER.TimerControlReg register can be configured at any time to disable WAKEUP_TIMER.

Usage Restrictions

- 1) TimerLoadCount must be set before starting timer_en, and if TimerLoadCount is modified midway, Timer must be disabled and then enable again.
- 2) TimerLoadCount time interval cannot be set to 0x1~0xF, which is a relatively small value. It is desired to set the time to be at least 1ms, TimerLoadCount>0x1F.

Register List

Register Mapping

WAKEUP_TIMER_BASE : 0x50000E00

Offset	Register Name	Description	Reset Value
0x00	TimerLoadCount	Wakeup timer load counter register	0x1FFFFFFF
0x08	TimerControlReg	Wakeup timer control register	0
0x0c	TimerEOI	Write 1 Clear Interrupt Status register	0
0x10	TimerIntStat	Interrupt status register	0

Register Detailed Description

RO: Read only, W: Write only, RW: Read/Write, WC: Write clear.

TimerLoadCount: Address(0x00)				
Bit	Symbol	R/W	Description	Default
31:25	Reserved	RO	Not used	0
24:0	TimerLoadCount	RW	Wakeup timer load counter register	0x1FFFFFFF

TimerControlReg: Address(0x08)				
Bit	Symbol	R/W	Description	Default
31:3	Reserved	RO	Not used	0
2	TimerIntMsk	RW	interrupt mask. 0: Diasble 1: Enable	0
1	Reserved	RO	Not used	0
0	TimerEn	RW	Timer enable. 0: Diasble 1: Enable	0

TimerEOI: Address(0x0c)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	TimerIntclr	WC	Write 1 Clear Interrupt Status.	0

TimerIntStat: Address(0x10)				
Bit	Symbol	R/W	Description	Default
31:1	Reserved	RO	Not used	0
0	TimerIntstate	RO	Interrupt state.	0

Awinic Confidential

APPLICATION INFORMATION

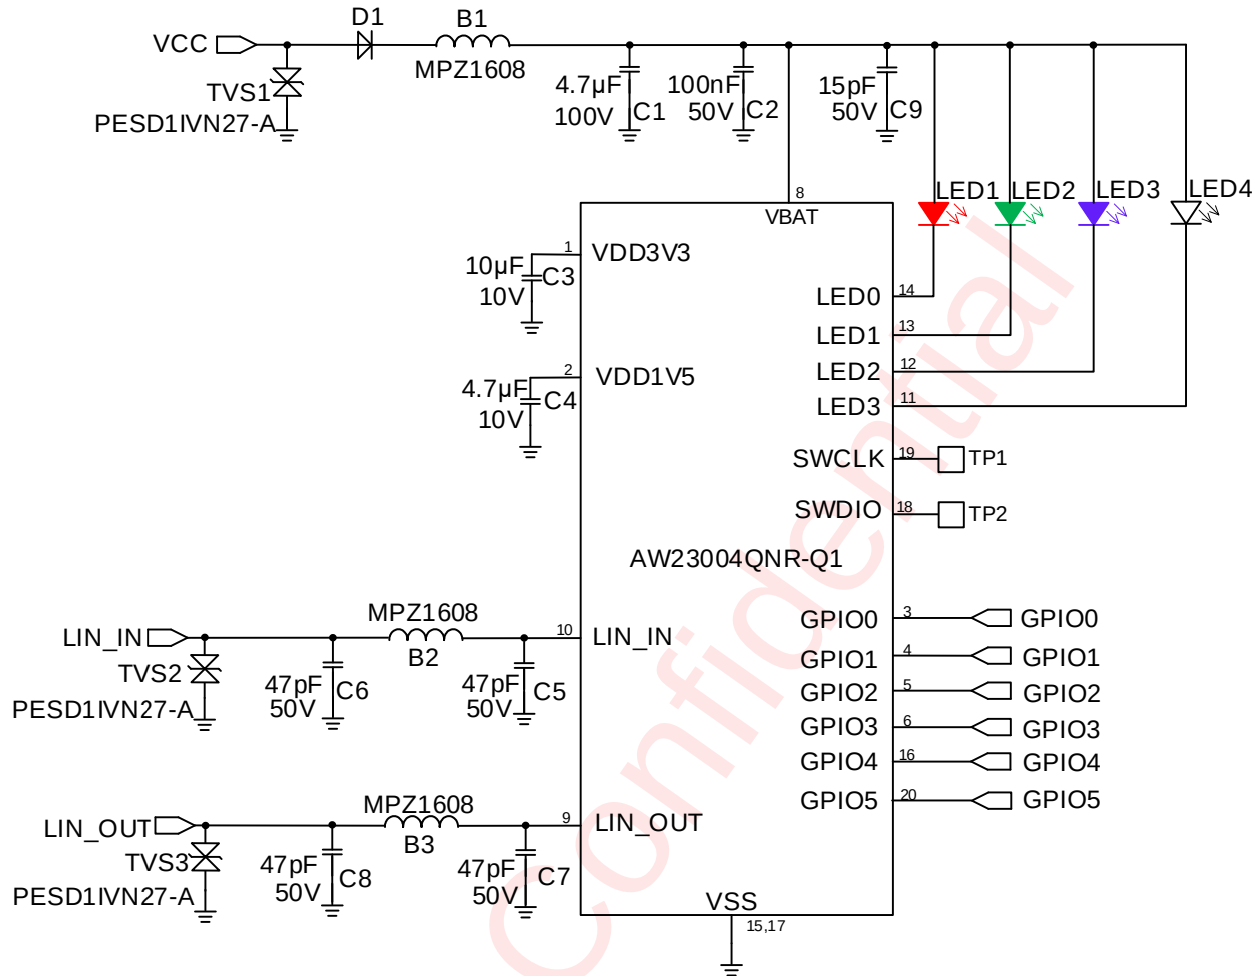


Figure 10 AW23004QNR-Q1 Typical Application Circuit

Component selection instructions

The recommended value of capacitor C1 is 4.7µF, C2 is 0.1µF, C3 is 10µF, and C5, C6, C7 and C8 is 220pF. The specific capacity can be selected according to the application and debugging.

It is recommended to reserve a capacitor position for the LED anode to prevent EMC issues that may arise from different LED characteristics.

VBAT, LIN_IN and LIN_OUT lines reserve series magnetic beads B1, B2 and B3, mainly to reduce EMI interference, which can be selected according to debugging. It is recommended that to place B1 between D1 and C1.

The series diode is recommended at the input of the VBAT power supply, and the circuit to prevent the reverse current is realized by using the unidirectional conductive characteristics of the diode.

VBAT, LIN_IN and LIN_OUT wiring port reserved TVS tube, recommended bipolar working voltage of 27V bipolar TVS tube, improve ESD capacity, specific specifications can be selected according to the application and debugging.

Choose the appropriate LED according to the actual needs.

Component List

Component	Designator	Description	Range	Recommend Value	Unit
Capacitance	C1	100V, X7R	1~100	4.7	μF
Capacitance	C2	50V, X7R	/	0.1	μF
Capacitance	C3	10V, X7R	4.7~10	10	μF
Capacitance	C4	10V, X7R	1~4.7	4.7	μF
Capacitance	C5、C6、C7、C8	50V, X7R	/	220	pF
Capacitance	C9	50V, X7R	10~20	15	pF
Diode	D1		/	/	/
TVS	TVS1、TVS2、TVS3	PESD11VN27-A	/	/	/
Bead	B1, B2, B3	MPZ1608	/	/	/
LED	LED1, LED2, LED3, LED4	/	/	/	/

PCB LAYOUT CONSIDERATION

To fully utilize the performance of the AW23004QNR-Q1, the PCB layout and routing should be carefully considered. The design process should follow the following principles:

- 1) The power decoupling capacitors (C1 C2) of chip AW23004QNR-Q1 should be placed as close as possible to the VBAT pin of the chip, and follow the principle that the current first passes through the large capacitor, then passes through the small capacitor, and finally reaches the chip. It is recommended to place the LED capacitor near the LED anode and VSS to reduce the LED circuit area. It is recommended to place ground around the chip, away from high-frequency devices, as shown in the figure:
- 2) The wire width of VBAT power supply to chip pin is not less than 0.25mm, the wire width of VBAT connected to LED lamp is not less than 0.75mm, and the wire width of each LED is not less than 0.25mm;
- 3) Requirements for LIN_IN and LIN_OUT:
 - The signal lines of LIN_IN and LIN_OUT are separated from the power line to avoid crossing with the power line to reduce interference;
 - Separate layout with high-frequency signal lines to reduce mutual interference;
 - Chip away from the high-frequency chip at least 3mm;
 - Reasonably set the direction and length of LIN_IN and LIN_OUT signal lines to ensure the stability and reliability of signal transmission.
- 4) The maximum output current of GPIOs port is 10mA, and the recommended trace width is not less than 0.25mm.



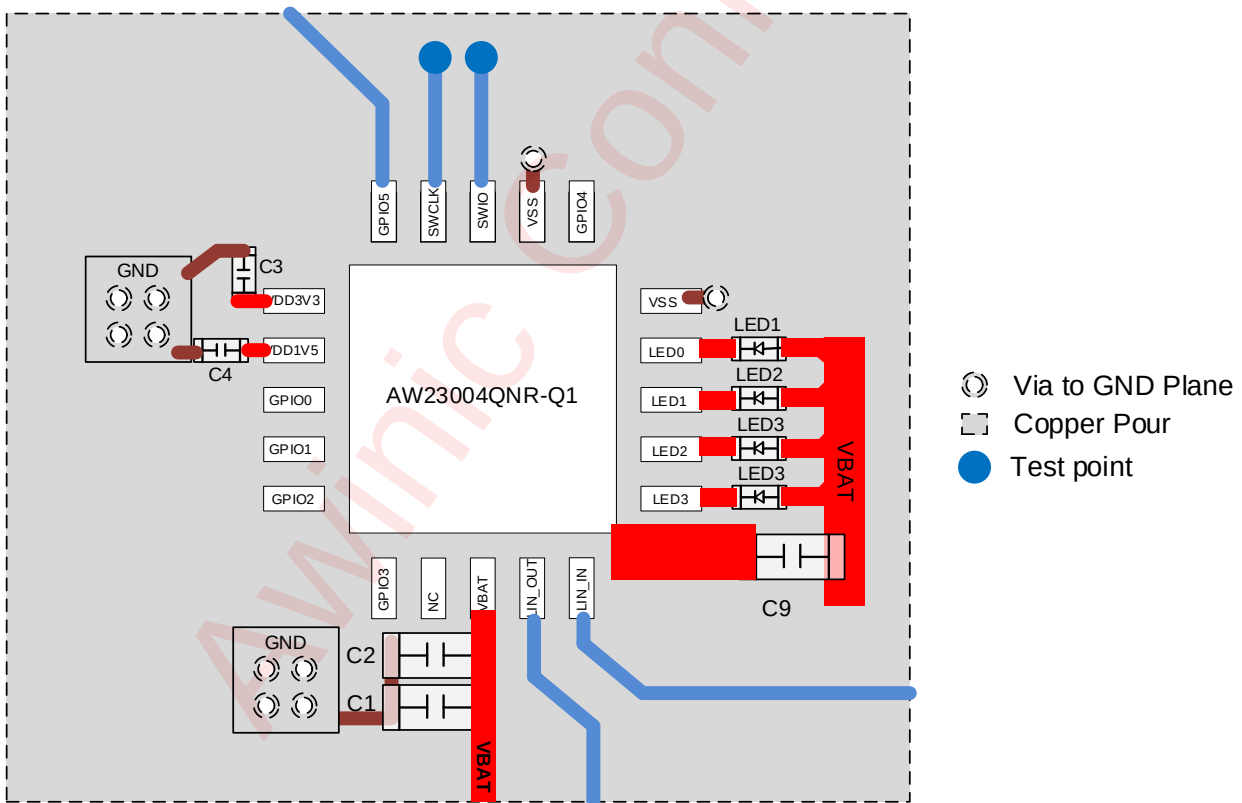


Figure 11 AW23004QNR-Q1 PCB LAYOUT

TAPE AND REEL INFORMATION

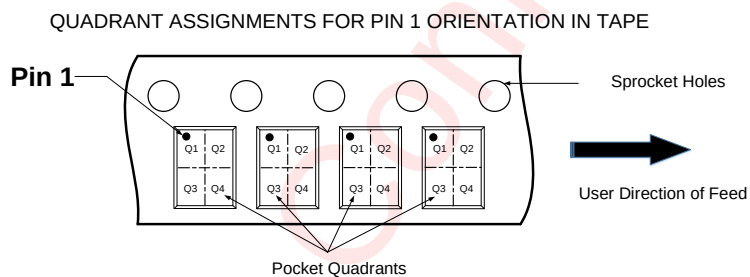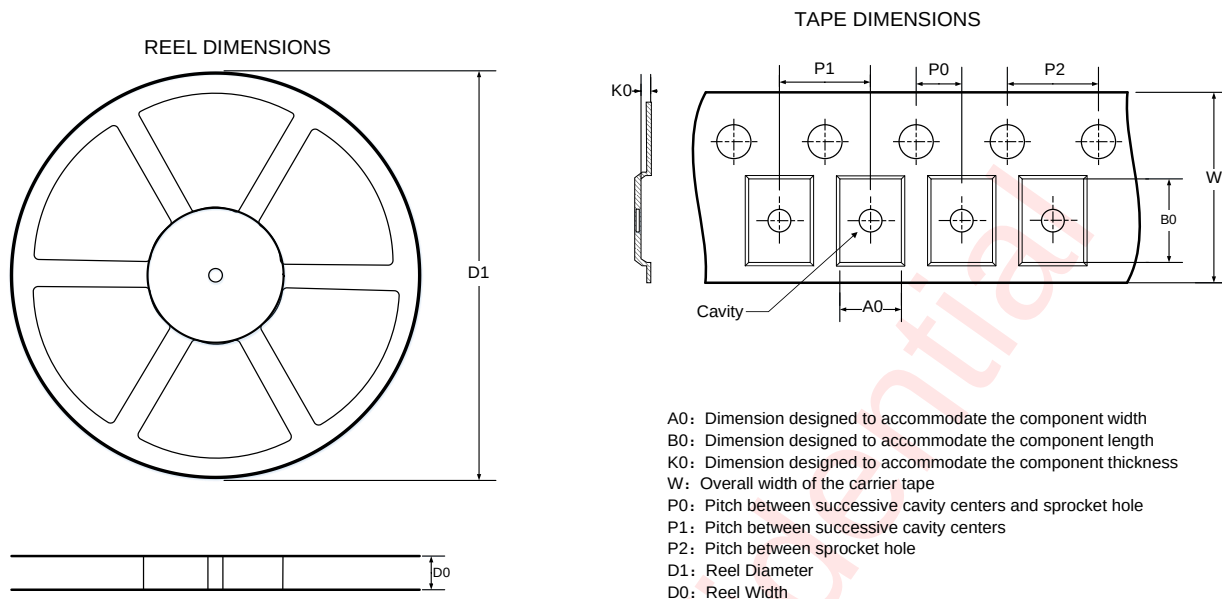


Note: The above picture is for reference only. Please refer to the value in the table below for the actual size

DIMENSIONS AND PIN1 ORIENTATION

D1 (mm)	D0 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
330	12.4	4.3	4.3	1.1	2	8	4	12	Q1


All dimensions are nominal

PACKAGE DESCRIPTION

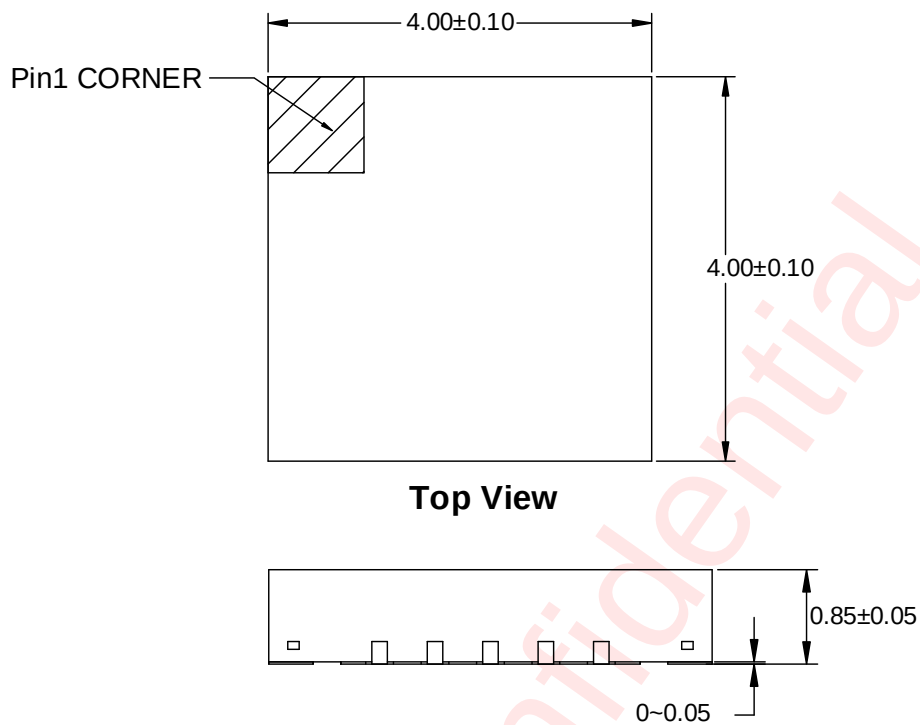

Top View


Side View

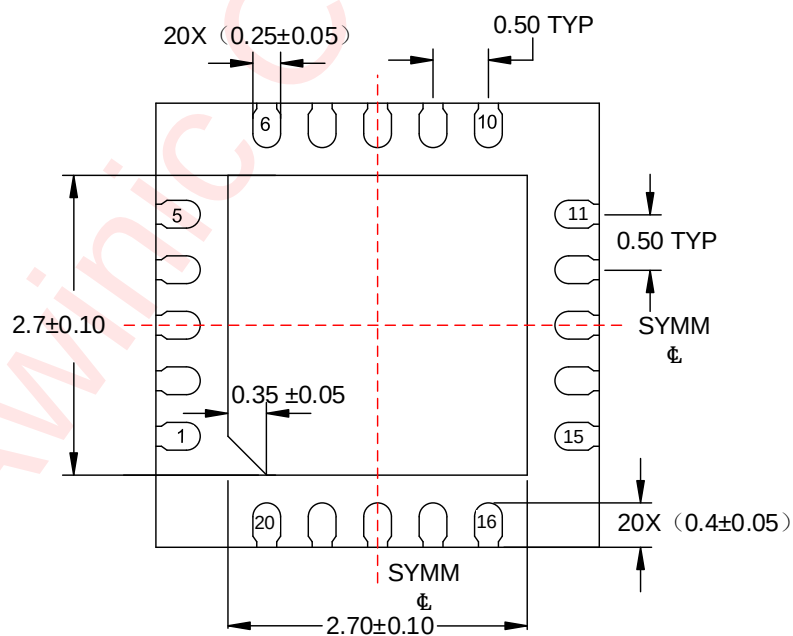


Bottom View

Unit: mm

LAND PATTERN DATA

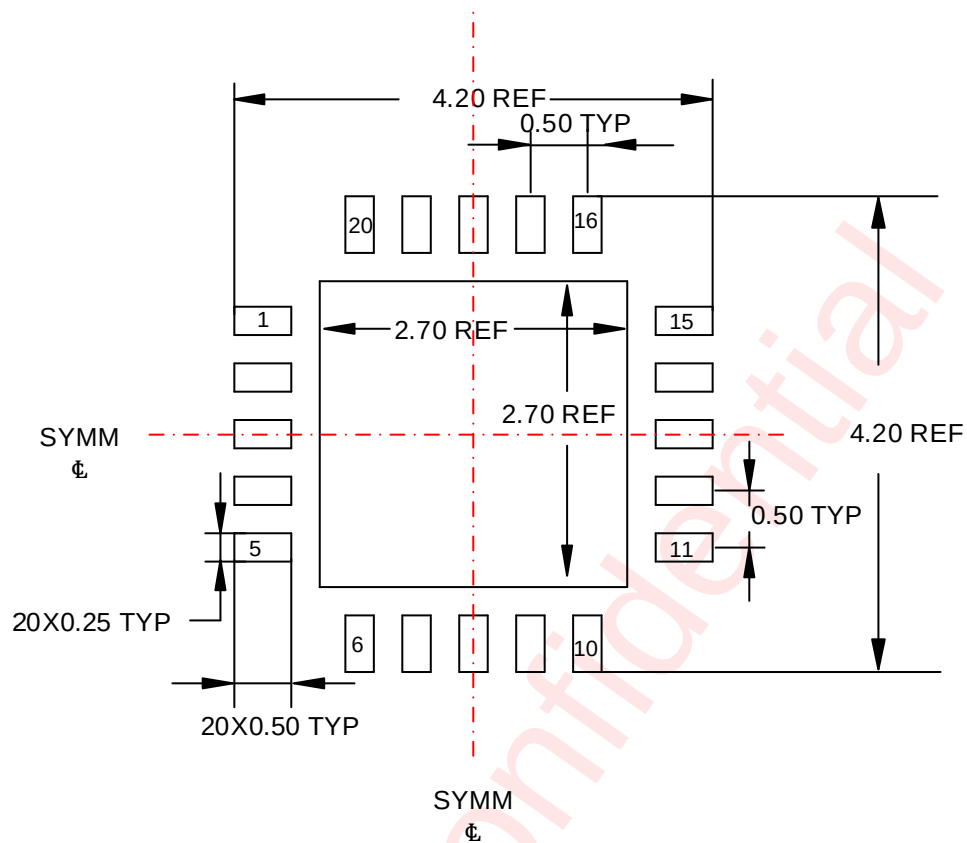


0.05 MAX
All AROUND



NON SOLDER MASK DEFINED

0.05 MIN
All AROUND



SOLDER MASK DEFINED

Unit: mm

REVISION HISTORY

Version	Date	Change Record
V1.0	Aug. 2024	Officially released
V1.1	Oct. 2024	Update Moisture Sensitivity Level to MSL3 (P5)
V1.2	Apr. 2025	Update Typical Application Circuit and application information (P2, 5, 84-86)

Awinic Confidential

DISCLAIMER

All trademarks are the property of their respective owners. Information in this document is believed to be accurate and reliable. However, Shanghai AWINIC Technology Co., Ltd (AWINIC Technology) does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

AWINIC Technology reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. Customers shall obtain the latest relevant information before placing orders and shall verify that such information is current and complete. This document supersedes and replaces all information supplied prior to the publication hereof.

AWINIC Technology products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an AWINIC Technology product can reasonably be expected to result in personal injury, death or severe property or environmental damage. AWINIC Technology accepts no liability for inclusion and/or use of AWINIC Technology products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications that are described herein for any of these products are for illustrative purposes only. AWINIC Technology makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

All products are sold subject to the general terms and conditions of commercial sale supplied at the time of order acknowledgement.

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Reproduction of AWINIC information in AWINIC data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. AWINIC is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of AWINIC components or services with statements different from or beyond the parameters stated by AWINIC for that component or service voids all express and any implied warranties for the associated AWINIC component or service and is an unfair and deceptive business practice. AWINIC is not responsible or liable for any such statements.