



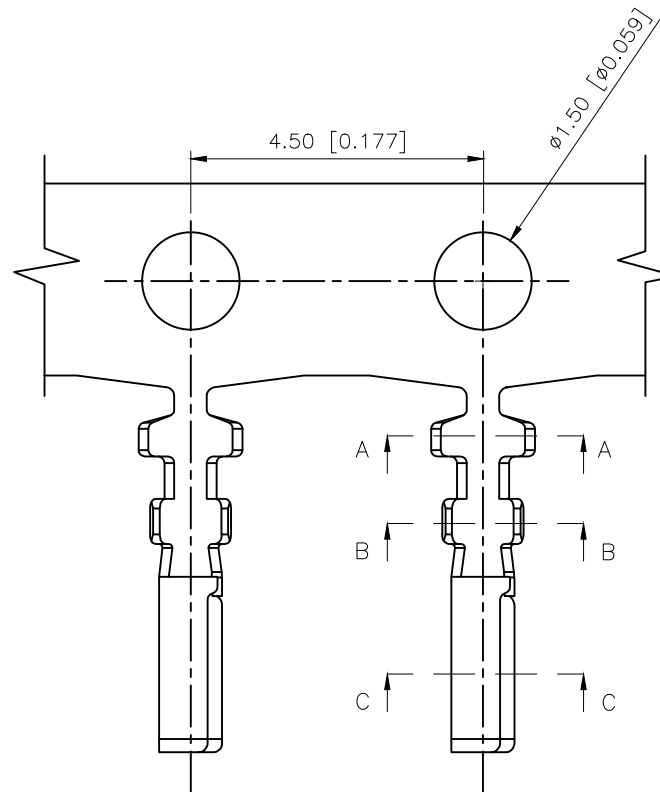


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.31	阿树

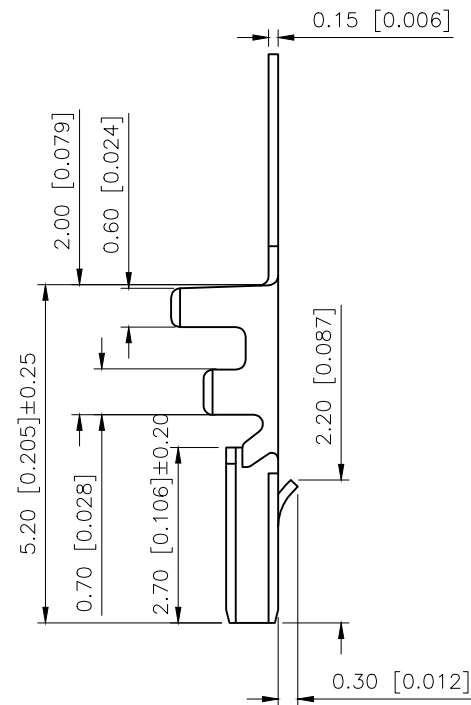

Specifications:

规格:

Voltage rating: 50V AC/DC

额定电压: 50V AC/DC

Current rating: 1A AC/DC

额定电流: 1A AC/DC

Contact resistance: 20mΩ Max

接触电阻: 20mΩ Max

Insulation resistance: 100MΩ min

绝缘电阻: 100MΩ Min

Withstanding voltage: 250V AC/minute

耐受电压: 250V AC/分钟

Temperature range: -40℃~+125℃

温度范围: -40℃~+125℃

Cycles: 12000

寿命: 12000

PART NO.:

X1254 I-P SN
① ② ③ ④

①Series Number.

②Category: T-terminal

③Material: P-Phosphor bronze

④Plating: XX:V01-Gold Plated

SN-Tin Plating

X1254T-PV01	Phosphor bronze	AWG#28~32	1.0mm(MAX)	Stamping Pating 30u"Ni Whole Gold Flash	X1254H
X1254T-PSN				Stamping Before Pating: 30u" Ni 70U"Sn Min	
PART NO	Material	Wire Range	Insulation O.D	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	1.25mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.:	X1254T-PSN
APPROVED		SIZE:	A4	DWG NO.:	X-X1254T-PSN