

XtremeSense™ TMR Differential Coreless Current Sensor with Programmable Gain

FEATURES AND BENEFITS

- User-programmable field range:
 - 6 to 8 mT □ 12 to 48 mT
- Preset magnetic field ranges:
 - ± 6 mT
- AEC-Q100 Grade 1 ^[1] automotive qualified (A variants only)
- Optimized for high dV/dt applications
- Differential sensing for stray-magnetic-field suppression
- Linear analog output voltage
- 1 MHz bandwidth
- Response time: < 300 ns
- Supply voltage: 3.3 or 5 V
- Low-noise performance
- Package: 8-lead TSSOP

PACKAGE



Not to scale

8-lead TSSOP

APPLICATIONS

- Solar/power inverters
- Battery management systems
- Industrial equipment
- Power utility meters
- Power conditioner
- DC-DC converters

DESCRIPTION

The CT456 is a high-bandwidth and low-noise integrated zero-loss contactless current sensor that uses Allegro patented XtremeSense tunnel magnetoresistance (TMR) technology to enable high-accuracy current measurements for many consumer, enterprise, and industrial applications. The device supports two standard field ranges where the CT456 senses and translates the magnetic field into a linear analog output voltage.

The CT456 is also available in a user-programmable variant, which enables end-of-line calibration of gain and offset. While the sensor is preprogrammed to compensate for gain and offset temperature drift, the ability to adjust offset and gain relaxes mechanical tolerances during sensor mounting.

This coreless current sensor is not only small in size and simple to incorporate into a design, but it also provides effective common-mode rejection. This enables the CT456 to have greater than 90% immunity to stray magnetic fields, which thus have almost no impact on the accuracy of the current measurement.

The device has less than 300 ns output response time while the current consumption is ~ 6 mA. The CT456 is equipped with a filter function to reduce the noise on the output pin.

The CT456 is assembled in a low-profile, industry-standard eight-lead thin-shrink small-outline package (TSSOP) that is green and RoHS compliant.

FUNCTIONAL BLOCK DIAGRAM

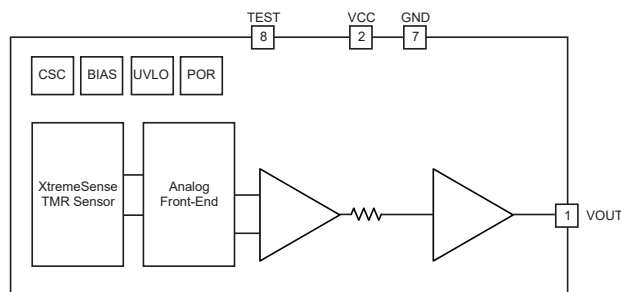


Figure 1: CT456 Functional Block Diagram for TSSOP-8

[1] For more details, see the Testing and Quality Assurance section.

Table of Contents

Features and Benefits.....	1	Electrical Characteristics	6
Description	1	Calibration Description.....	12
Applications.....	1	Device Programming	12
Packages.....	1	Functional Description	15
Functional Block Diagrams.....	1	XtremeSense TMR Current Sensor Location	17
Selection Guide	2	Package Outline Drawings	18
Absolute Maximum Ratings	3	Tape and Reel Pocket Drawings and Dimensions.....	19
Recommended Operating Conditions	3	Device Markings	20
Application Diagrams.....	4	Part Ordering Number Legend	21
Pinout Diagrams and Terminal Lists.....	5	Revision History	22

SELECTION GUIDE

Part Number	Qualification	Polarity	Range (mT)	Supply Voltage (V)	Configuration	Operating Temperature Range (°C)	Package
FACTORY-CALIBRATED SENSORS							
CT456-A06B5-TS08	AEC-Q100 Grade 1	Bipolar	±6	5	Differential	−40 to 125	8-lead TSSOP 3 mm × 6.4 mm × 1.1 mm
CT456-H06B5-TS08	—						
PROGRAMMABLE SENSORS							
CT456-A00B3-TS08	AEC-Q100 Grade 1	Bipolar	±6 to ±8 and ±12 to ±48	3.3	Differential	−40 to 125	8-lead TSSOP 3 mm × 6.4 mm × 1.1 mm
CT456-H00B3-TS08	—						
CT456-A00B5-TS08	AEC-Q100 Grade 1	Bipolar	±6 to ±8 and ±12 to ±48	5			
CT456-H00B5-TS08	—						
CT456-A00U5-TS08	AEC-Q100 Grade 1	Unipolar					
CT456-H00U5-TS08	—						

ABSOLUTE MAXIMUM RATINGS [1]

Characteristic	Symbol	Notes	Rating	Unit
Supply Voltage	V_{CC}		-0.3 to 6	V
Analog Input/Output Pins, Maximum Voltage	$V_{I/O}$		-0.3 to ($V_{CC} + 0.3$) [2]	V
Electrostatic Discharge Protection Level	ESD	Human Body Model (HBM) per JESD22-A114	± 2 (min)	kV
		Charged Device Model (CDM) per JESD22-C101	± 0.5 (min)	kV
Junction Temperature	T_J		-40 to 150	°C
Storage Temperature	T_{STG}		-65 to 155	°C
Lead Soldering Temperature	T_L	10 seconds	260	°C

[1] Stresses exceeding the absolute maximum ratings may damage the CT456: The CT456 may not function or be operable at levels that exceed the recommended operating conditions, and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses that exceed the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

[2] The lower of ($V_{CC} + 0.3$ V) or 6 V.

RECOMMENDED OPERATING CONDITIONS [1]

Characteristic	Symbol	Notes	Min.	Typ.	Max.	Unit
Supply Voltage Range	V_{CC}	5 V_{CC} variant (-x5)	4.75	5	5.5	V
		3.3 V_{CC} variant (-x3)	3	3.3	3.6	V
Output Voltage Range	V_{OUT}		0	—	V_{CC}	V
Output Current	I_{OUT}		—	—	± 1	mA
Operating Ambient Temperature	T_A	Extended Industrial	-40	25	125	°C

[1] The Recommended Operating Conditions table defines the conditions for actual operation of the CT456. Recommended operating conditions are specified to ensure optimal performance to the specifications. Allegro does not recommend exceeding them or designing to absolute maximum ratings.

APPLICATION DIAGRAM

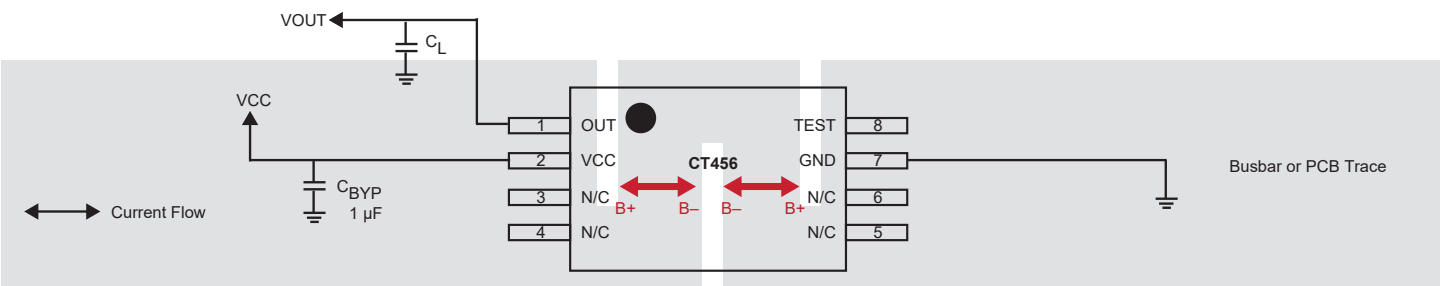


Figure 2: CT456 Application Diagram for Measuring
Differential Magnetic Field for TSSOP-8

PINOUT DIAGRAM AND TERMINAL LIST

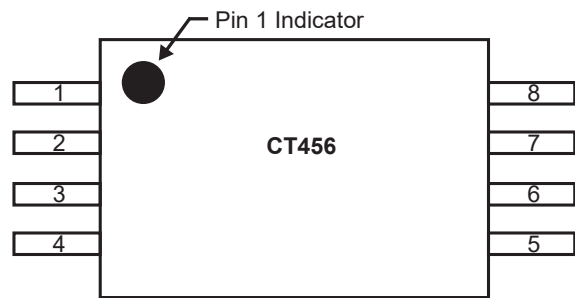


Figure 3: CT456 Pinout Diagram for Eight-Lead TSSOP
(Top-Down View)

Terminal List

Number	Name	Function
1	OUT	Analog output voltage that represents the measured current/field.
2	VCC	Supply voltage.
3, 4, 5, 6	NC	No connect (leave floating).
7	GND	Ground.
8	TEST	Pin used for calibration. Connect to ground if not used.

ELECTRICAL CHARACTERISTICS: $V_{CC} = 3$ to 3.6 V or 4.75 to 5.5 V, $T_A = -40^\circ\text{C}$ to 125°C , $C_{BYP} = 1$ μF , unless otherwise specified; typical values are $V_{CC} = 3.3$ or 5 V and $T_A = 25^\circ\text{C}$

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
POWER SUPPLIES						
Supply Current	I_{CC}	$f_{BW} = 1$ MHz, no load, $B_{OP} = 0$ mT	–	6	9	mA
OUT Maximum Drive Capability	I_{OUT}	OUT covers 10% to 90% of V_{CC} span	–1	–	1	mA
OUT Capacitive Load	C_L		–	–	100	pF
OUT Resistive Load	R_L		–	100	–	k Ω
Power Supply Rejection Ratio ^[1]	PSRR		–	35	–	dB
Sensitivity Power Supply Rejection Ratio ^[1]	SPSRR		–	35	–	dB
Offset Power Supply Rejection Ratio ^[1]	OPSRR		–	40	–	dB
Bandwidth ^[1]	f_{BW}	Small signal = –3 dB	–	1	–	MHz
ANALOG OUTPUT (OUT)						
OUT Voltage Linear Range	V_{OUT}	$5 V_{CC}$ variant (-x5)	0.5	–	4.5	V
		$3.3 V_{CC}$ variant (-x3)	0.65	–	2.65	V
Output High Saturation Voltage	V_{OUT_SAT}	$T_A = 25^\circ\text{C}$	$V_{CC} - 0.3$	$V_{CC} - 0.25$	–	V
TIMINGS						
Power-On Time	t_{ON}	$V_{CC} \geq 4$ V variant (-x5), $V_{CC} \geq 2.5$ V variant (-x3)	–	100	200	μs
Rise Time ^[1]	t_{RISE}	$B_{OP} = B_{RNG(MAX)}$, $T_A = 25^\circ\text{C}$, $C_L = 100$ pF	–	200	–	ns
Response Time ^[1]	$t_{RESPONSE}$	$B_{OP} = B_{RNG(MAX)}$, $T_A = 25^\circ\text{C}$, $C_L = 100$ pF	–	300	–	ns
Propagation Delay ^[1]	t_{DELAY}	$B_{OP} = B_{RNG(MAX)}$, $T_A = 25^\circ\text{C}$, $C_L = 100$ pF	–	250	–	ns
PROTECTION						
Undervoltage Lockout	V_{UVLO}	Rising V_{CC}	–	2.5	–	V
		Falling V_{CC}	–	2.45	–	V
UVLO Hysteresis	V_{UV_HYS}		–	50	–	mV

^[1] Guaranteed by design and characterization; not tested in production.

ELECTRICAL CHARACTERISTICS

$V_{CC} = 3.3$ or 5 V, $T_A = 25^\circ\text{C}$, and $C_{BYP} = 1\ \mu\text{F}$ (unless otherwise specified)

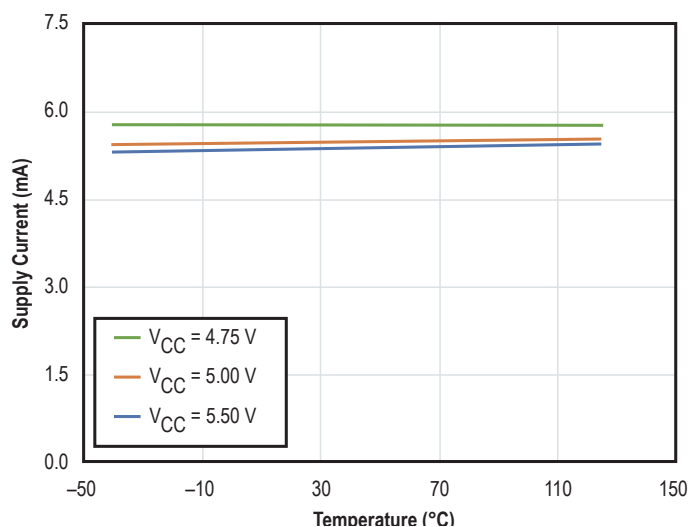


Figure 4: 5 V_{CC} Variant (-x5)
Supply Current vs. Temperature vs. Supply Voltage

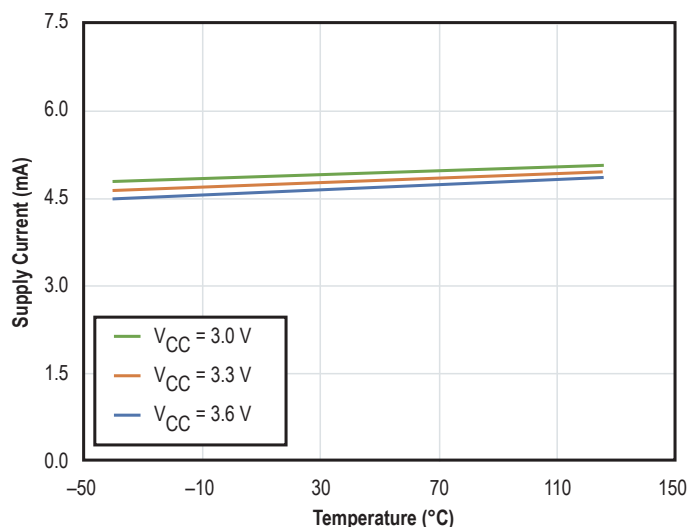


Figure 5: 3.3 V_{CC} Variant (-x3)
Supply Current vs. Temperature vs. Supply Voltage

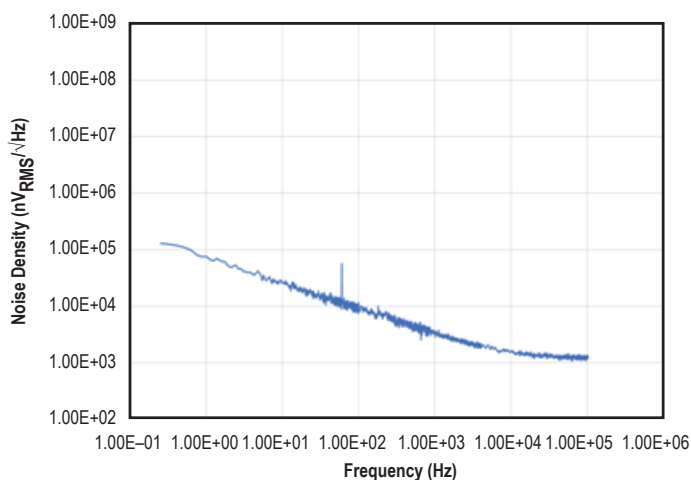


Figure 6: Noise Density vs. Frequency

CT456-x06B5: ±6 mT – ELECTRICAL CHARACTERISTICS: ^{[1][2]} $V_{CC} = 4.75$ to 5.5 V, $T_A = -40^{\circ}\text{C}$ to 125°C , $C_{BYP} = 1$ μF , unless otherwise specified; typical values are $V_{CC} = 5$ V and $T_A = 25^{\circ}\text{C}$

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Magnetic Field Range	B _{RNG}		−6	−	6	mT
Voltage Output Quiescent	V _{OQ}			2.5		V
Sensitivity	S		−	333.3	−	mV/mT
Bandwidth [3]	f _{BW}	Small signal = −3 dB	−	1	−	MHz
Noise	e _N	T _A = 25°C, f _{BW} = 100 kHz	−	2.77	−	μT _{RMS}
OUT ACCURACY PERFORMANCE						
Linearity Error	E _{LIN}	B _{OP} = B _{OP(MAX)} , T _A = −40°C to 125°C	−	±0.1	−	% FS
Sensitivity Temperature Drift	E _{SENS_Tdrift}	B _{OP} = B _{OP(MAX)} , T _A = 25°C to 125°C	−	±1.4	−	%
		B _{OP} = B _{OP(MAX)} , T _A = 25°C to −40°C	−	±1.6	−	%
Offset Voltage Error	V _{OE}	B _{OP} = 0 mT, T _A = 25°C	−	±4	−	mV
Offset Voltage Temperature Drift	V _{OE_Tdrift}	B _{OP} = 0 mT, T _A = 25°C to 125°C	−	±15	−	mV
		B _{OP} = 0 mT, T _A = 25°C to −40°C	−	±26	−	mV
LIFETIME DRIFT						
Sensitivity Error Including Lifetime Drift	E _{SENS(DRIFT)}	B _{OP} = B _{OP(MAX)} , T _A = −40°C to 125°C	−	±3	−	%
Offset Voltage Error Including Lifetime Drift	V _{OE(DRIFT)}	B _{OP} = 0 mT, T _A = −40°C to 125°C	−	±34	−	mV

[1] Typical (typ) values are the mean ±3 sigma of a test sample population. These are formatted as mean ±3 sigma.

[2] Lifetime drift characteristics are based on a statistical combination of production distributions and the worst-case distribution of parametric drift of individuals observed during AEC-Q100 qualification.

[3] Guaranteed by design and characterization. Not tested in production.

CT456-x00B5: Programmable Gain – ELECTRICAL CHARACTERISTICS: [1][2][3] $V_{CC} = 4.75$ to 5.5 V, $T_A = -40^{\circ}\text{C}$ to 125°C , $C_{BYP} = 1$ μF , unless otherwise specified; typical values are $V_{CC} = 5$ V and $T_A = 25^{\circ}\text{C}$

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Programmable Magnetic Field Range	B _{PRNG}		±6	–	±8	mT
			±12	–	±48	mT
Voltage Output Quiescent	V _{OQ}		–	2.5	–	V
Maximum Programmable Sensitivity	S _{PMAX}		–	333.3	–	mV/mT
Minimum Programmable Sensitivity	S _{PMIN}		–	41.7	–	mV/mT
Bandwidth [4]	f _{BW}	Small signal = –3 dB	–	1	–	MHz
Noise	e _N	T _A = 25°C, f _{BW} = 100 kHz, S = 41.7 mV/mT	–	6.44	–	μT _{RMS}
OUT ACCURACY PERFORMANCE [5]						
Linearity Error	E _{LIN}	B _{OP} = B _{OP(MAX)} , T _A = –40°C to 125°C	–	±0.3	–	% FS
Sensitivity Temperature Drift	E _{SENS_Tdrift}	B _{OP} = B _{OP(MAX)} , T _A = 25°C to 125°C	–	±1.4	–	%
		B _{OP} = B _{OP(MAX)} , T _A = 25°C to –40°C	–	±2.2	–	%
Offset Voltage Error	V _{OE}	B _{OP} = 0 mT, T _A = 25°C	–	±4	–	mV
Offset Voltage Temperature Drift	V _{OE_Tdrift}	B _{OP} = 0 mT, T _A = 25°C to 125°C	–	±15	–	mV
		B _{OP} = 0 mT, T _A = 25°C to –40°C	–	±26	–	mV
LIFETIME DRIFT [5]						
Sensitivity Error Including Lifetime Drift	E _{SENS(DRIFT)}	B _{OP} = B _{OP(MAX)} , T _A = –40°C to 125°C	–	±3	–	%
Offset Voltage Error Including Lifetime Drift	V _{OE(DRIFT)}	B _{OP} = 0 mT, T _A = –40°C to 125°C	–	±34	–	mV

[1] Tested on TSSOP package

[2] Typical (typ) values are the mean ± 3 sigma of a test sample population. These are formatted as mean ± 3 sigma.

[3] Lifetime drift characteristics are based on a statistical combination of production distributions and the worst-case distribution of parametric drift of individuals observed during AEC-Q100 qualification.

[4] Guaranteed by design and characterization. Not tested in production.

[5] Linearity and sensitivity temperature drift performance vary as a function of the sensitivity programmed. Errors are smaller when sensitivity is closer to the 6 mT version.

CT456-x00B3: Programmable Gain – ELECTRICAL CHARACTERISTICS: ^{[1][2]} $V_{CC} = 3$ to 3.6 V, $T_A = -40^{\circ}\text{C}$ to 125°C ,
 $C_{BYP} = 1$ μF , unless otherwise specified; typical values are $V_{CC} = 3.3$ V and $T_A = 25^{\circ}\text{C}$

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Programmable Magnetic Field Range	B _{PRNG}		±6	–	±8	mT
			±12	–	±48	mT
Voltage Output Quiescent	V _{OQ}		–	1.65	–	V
Maximum Programmable Sensitivity	S _{PMAX}		–	166.7	–	mV/mT
Minimum Programmable Sensitivity	S _{PMIN}		–	20.8	–	mV/mT
Bandwidth [3]	f _{BW}	Small signal = –3 dB	–	1	–	MHz
Noise	e _N	T _A = 25°C, f _{BW} = 100 kHz, S = 166 mV/mT	–	14	–	μT _{RMS}
OUT ACCURACY PERFORMANCE [4]						
Linearity Error	E _{LIN}	B _{OP} = B _{OP(MAX)} , T _A = –40°C to 125°C	–	±0.3	–	% FS
Sensitivity Temperature Drift	E _{SENS_Tdrift}	B _{OP} = B _{OP(MAX)} , T _A = 25°C to 125°C	–	±1.4	–	%
		B _{OP} = B _{OP(MAX)} , T _A = 25°C to –40°C	–	±2.2	–	%
Offset Voltage Error	V _{OE}	B _{OP} = 0 mT, T _A = 25°C	–	±4	–	mV
Offset Voltage Temperature Drift	V _{OE_Tdrift}	B _{OP} = 0 mT, T _A = 25°C to 125°C	–	±13	–	mV
		B _{OP} = 0 mT, T _A = 25°C to –40°C	–	±15	–	mV
LIFETIME DRIFT [4]						
Sensitivity Error Including Lifetime Drift	E _{SENS(DRIFT)}	B _{OP} = B _{OP(MAX)} , T _A = –40°C to 125°C	–	±3	–	%
Offset Voltage Error Including Lifetime Drift	V _{OE(DRIFT)}	B _{OP} = 0 mT, T _A = –40°C to 125°C	–	±20	–	mV

[1] Typical values are the mean ± 3 sigma of a test sample population. These are formatted as mean ± 3 sigma.

[2] Lifetime drift characteristics are based on a statistical combination of production distributions and the worst-case distribution of parametric drift of individuals observed during AEC-Q100 qualification.

[3] Guaranteed by design and characterization. Not tested in production.

[4] Linearity and sensitivity temperature drift performance vary as a function of the sensitivity programmed. Errors are smaller when sensitivity is closer to the 6 mT version.

CT456-x00U5: Programmable Gain – ELECTRICAL CHARACTERISTICS: ^{[1][2]} $V_{CC} = 4.75$ to 5.5 V, $T_A = -40^{\circ}\text{C}$ to 125°C , $C_{BYP} = 1$ μF , unless otherwise specified; typical values are $V_{CC} = 5$ V and $T_A = 25^{\circ}\text{C}$

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Programmable Magnetic Field Range	B _{PRNG}		0 to 6	–	0 to 8	mT
			0 to 12	–	0 to 48	mT
Voltage Output Quiescent	V _{OQ}		–	0.5	–	V
Maximum Programmable Sensitivity	S _{PMAX}		–	666.7	–	mV/mT
Minimum Programmable Sensitivity	S _{PMIN}		–	83.3	–	mV/mT
Bandwidth [3]	f _{BW}	Small signal = –3 dB	–	1	–	MHz
Noise	e _N	T _A = 25°C, f _{BW} = 100 kHz, S = 83.3 mV/mT	–	4.56	–	μT _{RMS}
OUT ACCURACY PERFORMANCE [4]						
Linearity Error	E _{LIN}	B _{OP} = B _{OP(MAX)} , T _A = –40°C to 125°C	–	±0.3	–	% FS
Sensitivity Temperature Drift	E _{SENS_Tdrift}	B _{OP} = B _{OP(MAX)} , T _A = 25°C to 125°C	–	±1.4	–	%
		B _{OP} = B _{OP(MAX)} , T _A = 25°C to –40°C	–	±2.2	–	%
Offset Voltage Error	V _{OE}	B _{OP} = 0 mT, T _A = 25°C	–	±7	–	mV
Offset Voltage Temperature Drift	V _{OE_Tdrift}	B _{OP} = 0 mT, T _A = 25°C to 125°C	–	±11	–	mV
		B _{OP} = 0 mT, T _A = 25°C to –40°C	–	±25	–	mV
LIFETIME DRIFT [4]						
Sensitivity Error Including Lifetime Drift	E _{SENS(DRIFT)}	B _{OP} = B _{OP(MAX)} , T _A = –40°C to 125°C	–	±3	–	%
Offset Voltage Error Including Lifetime Drift	V _{OE(DRIFT)}	B _{OP} = 0 mT, T _A = –40°C to 125°C	–	±32	–	mV

[1] Typical (typ) values are the mean ± 3 sigma of a test sample population. These are formatted as mean ± 3 sigma.

[2] Lifetime drift characteristics are based on a statistical combination of production distributions and the worst-case distribution of parametric drift of individuals observed during AEC-Q100 qualification.

[3] Guaranteed by design and characterization. Not tested in production.

[4] Linearity and sensitivity temperature drift performance vary as a function of the sensitivity programmed. Errors are smaller when sensitivity is closer to the 6 mT version.

Calibration Description

The CT456-x00 is factory-trimmed for sensitivity and offset temperature drift. The sensor provides the ability to adjust gain to allow for all the mechanical tolerances during manufacturing. Gain calibration is recommended to be performed at room temperature (25°C) using the LabView and NI PXI solution.

Device Programming

COMMUNICATION

The programmable versions of the device allow customization of the sensitivity and offset voltage. These devices use a one-time programming (OTP) method, and parameters can be adjusted through test modes (volatile) before permanent programming.

The test mode allows an external controller to read, write, and program the device. The device enters test mode when the TEST pin is pulled to 1.4 V above the VCC level. VCC must be 3.3 V.

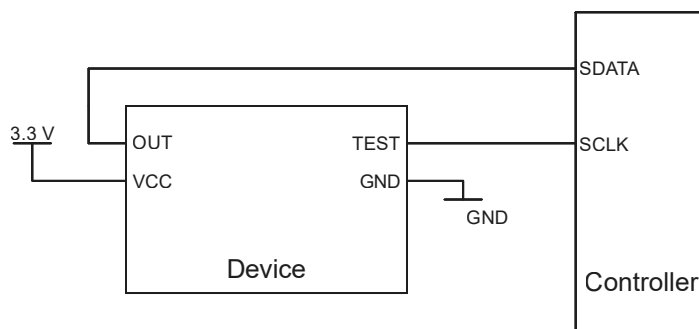


Figure 7: Programming Connections

Once the test mode is activated, the device expects 106 clock pulses on the TEST pin at the VCC voltage level or above, along with data on OUT. Those clock pulses should be separated by more than 1 μ s and less than 100 μ s. Data is read sequentially from the OUT pin upon each rising edge of TEST.

The fields for the data transmitted are:

- Key code (8 bits): should be 0b11110010; this prevents incorrect access
- OP code (2 bits):

OP Code	Description	OUT Operation	FILTER Operation	TEST Operation
0b00	Default operation	Analog output	Analog output	Open drain digital output
0b01	Program (permanently burns fuses; cannot be undone)	Serial data input	SCLK input	SDATA input
0b10	Try (emulates a configuration without permanent change)	Serial data input	SCLK input	SDATA input
0b11	Read fuse bits; volatile bits cannot be read	Serial data output	SCLK input	SDATA output

- CTRL code (16 bits): controls the connections of multiplexers; leave at 0
- FBIT (80 bits): trimming bits for offset, sensitivity, and temperature compensation


TIMING AND ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Units
SDATA Setup Time to SCLK	T_{SETUP}	15	—	—	ns
SDATA Hold Time to SCLK	T_{HOLD}	50	—	—	ns
SCLK Rise Time	T_{R1}	—	—	50	ns
SCLK Fall Time	T_{F1}	—	—	50	ns
SCLK High Time	T_{HIGH1}	500 [1]	—	—	ns
SCLK Low Time	T_{LOW1}	500 [1]	—	—	ns
SCLK High Voltage (typical pulse level for a test sequence)	V_{HIGH1}	$0.7 \times V_{\text{DD}}$	—	$V_{\text{DD}} + 1.5$	V
SCLK High Voltage (the first pulse for a test sequence)	V_{HIGH1}	$V_{\text{DD}} + 1.4$	$V_{\text{DD}} + 1.45$	$V_{\text{DD}} + 1.5$	V
SCLK Low Voltage	V_{LOW1}	-0.3	—	$0.3 \times V_{\text{DD}}$	V
SDATA Rise Time	T_{R2}	—	—	50	ns
SDATA Fall Time	T_{F2}	—	—	50	ns
SDATA High Time	T_{H2}	500	—	—	ns
SDATA Low Time	T_{LOW2}	500	—	—	ns
SDATA High Voltage	V_{HIGH2}	$0.7 \times V_{\text{DD}}$	—	V_{DD}	V
SDATA Low Voltage	V_{LOW2}	-0.3	—	$0.3 \times V_{\text{DD}}$	V
Supply Voltage	V_{DD}	2.97	3.3	4	V

[1] During programming, it should be greater than 2500 ns.


READ

After the device receives the correct KEY code and OP code = 0b11, it starts to output FBIT from the 28th SCLK pulse starting from FBIT[0].

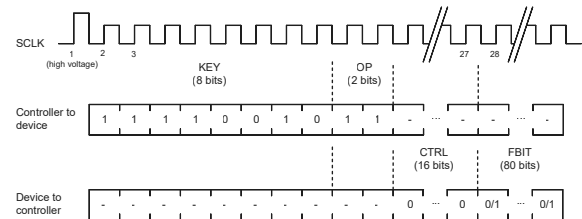

WRITE (VOLATILE)

After the device receives the correct KEY code and OP code = 0b01, if FBIT[76] is not set, update CTRL and FBIT with the received data.



To update only a part of FBIT, all other bits must be written as well. It might be needed to first read FBIT, then write it back with the relevant bits updated.

WRITE (PERMANENT)

After the device receives the correct KEY code and OP code = 0b10, if FBIT[76] is not set, update CTRL and permanently fuse FBIT with the previously volatile programmed data. The CTRL and FBIT data sent along with the fuse command are discarded. Cannot be undone.



TIME OUT

After a high-voltage pulse, the device returns to typical operation (timeout event) if:

- An incorrect KEY code is received
- OP code = 0b00
- Two SCLK rising edges are separated by more than 100 μ s.

Additional SCLK pulses after the 106 needed are discarded, but typical operation resumes only after timeout.

BITS DESCRIPTION

Location	Name	Description	Bits	Factory Default
CTRL[0:16]	Control bits	Factory trimmed. Do not modify.	16	0x00
FBIT[0]	–	Factory trimmed. Do not modify.	1	0
FBIT[19:1]	–	Factory trimmed. Do not modify.	19	Trimmed
FBIT[27:20]	V_OS_MAG_LEFT	Trims the magnetic offset of the left AFE up/down.	8	0
FBIT[35:28]	V_OS_MAG_RIGHT	Trims the magnetic offset of the right AFE up/down.	8	0
FBIT[43:36]	V_OS_ELECT_LEFT	Trims the electronic offset of the left AFE up/down.	8	0
FBIT[51:44]	V_OS_ELECT_RIGHT	Trims the electronic offset of the right AFE up/down.	8	0
Bit[59:52]	GAIN_INSTR_AMPS_LEFT	Trims the gain of the left AFE up/down.	8	0
Bit[67:60]	GAIN_INSTR_AMPS_RIGHT	Trims the gain of the right AFE up/down.	8	0
Bit[69:68]	–	Factory trimmed. Do not modify.	2	Trimmed
Bit[70]	GAIN_FOR_12MT	If Lo → 8 mT (20 A)/Hi → 12 mT (30 A) full-scale field.	1	0
Bit[79:71]	–	Factory trimmed. Do not modify.	9	Trimmed

FUNCTIONAL DESCRIPTION

Overview

The CT456 is a very-high-accuracy, coreless, contactless current sensor that can sense magnetic fields from 6 to 48 mT. The device has high sensitivity and a wide dynamic range with excellent accuracy (low total output error) across temperature.

The CT456 is also available in a user-programmable variant that enables end-of-line calibration of gain. While the sensor is pre-programmed to adjust sensitivity and offset temperature drift, the ability to adjust gain relaxes mechanical tolerances during sensor mounting.

When current is flowing through a busbar above or below the CT456, the XtremeSense TMR sensor inside the chip senses the field and generates corresponding differential voltage signals that then pass through the analog front-end (AFE) to output a current measurement.

The chip is designed to enable a fast response time of 300 ns for the current measurement from the OUT pin, as the bandwidth for the CT456 is 1 MHz. Even with a high bandwidth, the chip consumes a minimal amount of power.

Testing and Quality Assurance

Testing of the CT456 was conducted following AEC-Q100 standards to ensure reliability and performance in automotive conditions. During qualification, only the offset voltage error was tested at -40°C , 25°C , and 125°C . Sensitivity error was not checked directly during qualification but is estimated from qualification of similar packages.

Linear Output Current Measurement

The CT456 provides a continuous linear analog output voltage that represents the magnetic field generated by the current flowing through the busbar.

For the 5 V variant, the output voltage range of OUT is from 0.5 to 4.5 V with a V_{OQ} of 0.5 and 2.5 V for unidirectional and bidirectional fields, respectively. The output voltage range of the OUT pin as a function of the measured field is illustrated in Figure 8.

For the 3.3 V variant, the output voltage range of OUT is from 0.65 to 2.65 V with a V_{OQ} of 0.65 and 1.65 V for unidirectional

and bidirectional fields, respectively. The output voltage range of the OUT pin as a function of the measured field is illustrated in Figure 9.

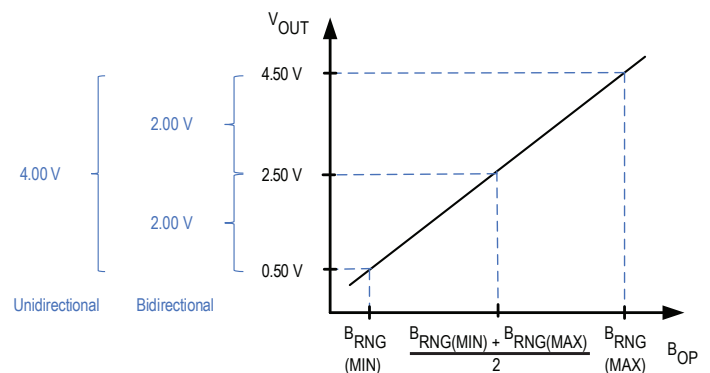


Figure 8: Linear Output Voltage Range (OUT) vs. Measured Magnetic Field (B_{OP})

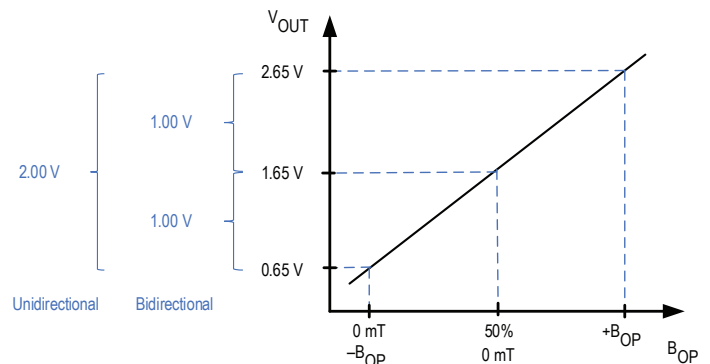


Figure 9: Linear Output Voltage Range (OUT) vs. Measured Magnetic Field (B_{OP})

Power-On Time (t_{ON})

Power-on time (t_{ON}) of 100 μs is the amount of time required by CT456 to start up, fully power the chip, and become fully operational from the moment the supply voltage is greater than the UVLO voltage. This time includes the ramp-up time and the settling time (within 10% of steady-state voltage under an applied magnetic field) after the power supply has reached the minimum V_{CC} .

Response Time (t_{RESPONSE})

Response time (t_{RESPONSE}) is the period of time between:

1. When the primary current signal reaches 90% of its final value, and
2. When the chip reaches 90% of its output corresponding to the applied current.

The CT456 has a response time of 300 ns.

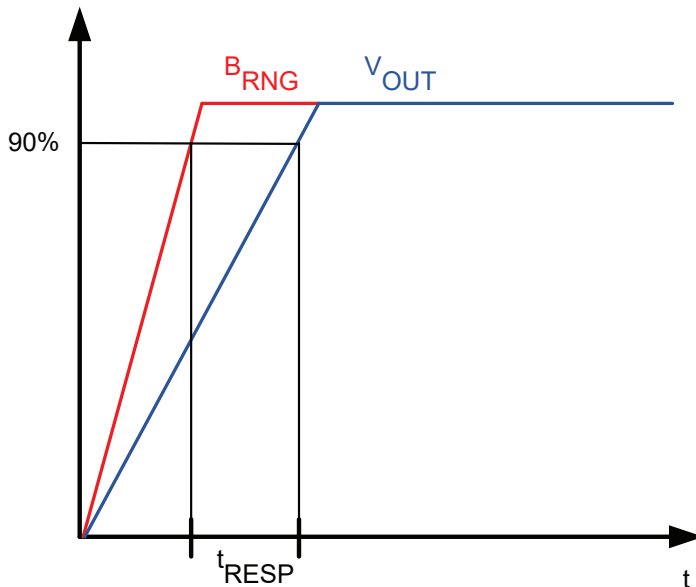


Figure 10: CT456 Response Time Curve

Rise Time (t_{RISE})

Rise time (t_{RISE}) is the period of time between when 10% and 90% of the full-scale output voltage is reached.

The CT456 has a rise time of 200 ns.

Propagation Delay (t_{DELAY})

Propagation delay (t_{DELAY}) is the period of time between:

1. When the primary current reaches 20% of its final value, and
2. When the chip reaches 20% of its output corresponding to the applied current.

The CT456 has a propagation delay of 250 ns.

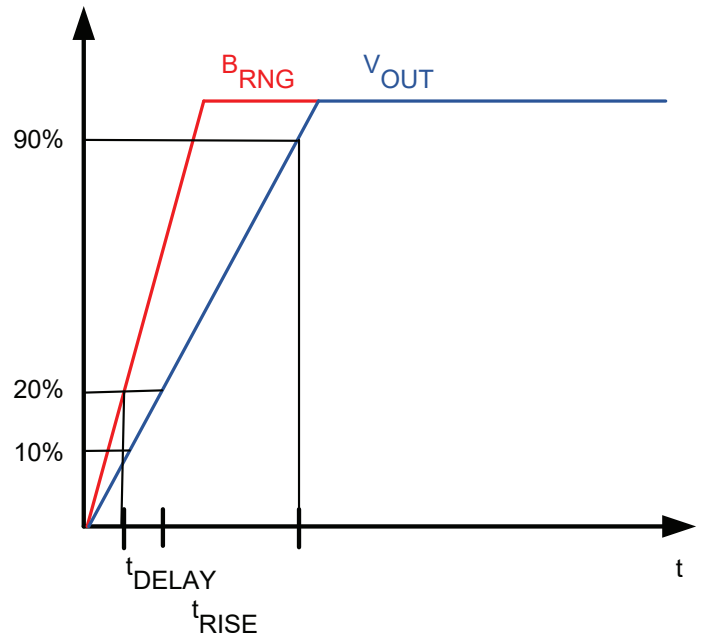


Figure 11: CT456 Propagation Delay and Rise Time Curve

Undervoltage Lockout (UVLO)

The undervoltage lockout protection circuitry of the CT456 is activated when the supply voltage (V_{CC}) reduces to less than 2.45 V. The CT456 remains in a low quiescent state until V_{CC} increases to greater than the UVLO threshold (2.5 V). In the condition where V_{CC} is less than 2.45 V and UVLO is triggered, the output from the CT456 is not valid. Once V_{CC} increases to greater than 2.5 V, the UVLO is cleared.

Current Sensing

The CT456 can sense and, therefore, measure the current by either placing a current-carrying busbar above or under the device. The chip is also sensitive enough to measure the current from a PCB trace that is routed beneath it.

Bypass Capacitor

A single 1 μF capacitor is needed for the V_{CC} pin to reduce the noise from the power supply and other circuits. This capacitor should be placed as close as practical to the CT456 to minimize inductance and resistance between the two devices.

XtremeSense TMR Current Sensor Location

The XtremeSense TMR current sensor location of the CT456 is shown in the figure that follows. All dimensions in the figures are nominal.

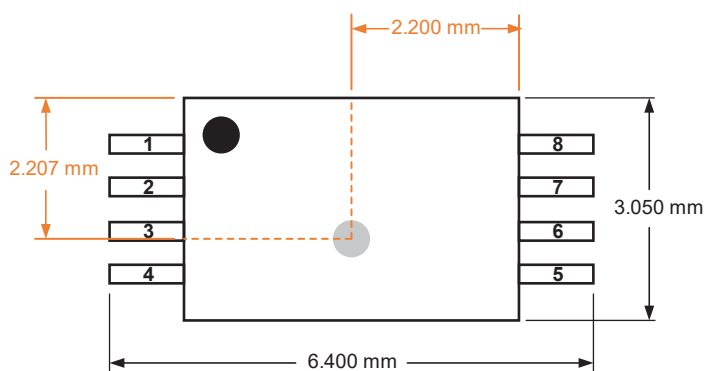


Figure 12: XtremeSense TMR Current Sensor Location in x-y Plane for CT456 in TSSOP-8 Package

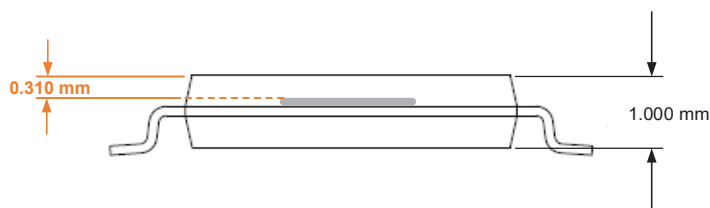



Figure 13: XtremeSense TMR Current Sensor Location in z Dimension for CT456 in TSSOP-8 Package

PACKAGE OUTLINE DRAWINGS
For Reference Only – Not for Tooling Use

Dimensions in millimeters – NOT TO SCALE

Dimensions exclusive of mold flash, gate burs, and dambar protrusions

Exact case and lead configuration at supplier discretion within limits shown

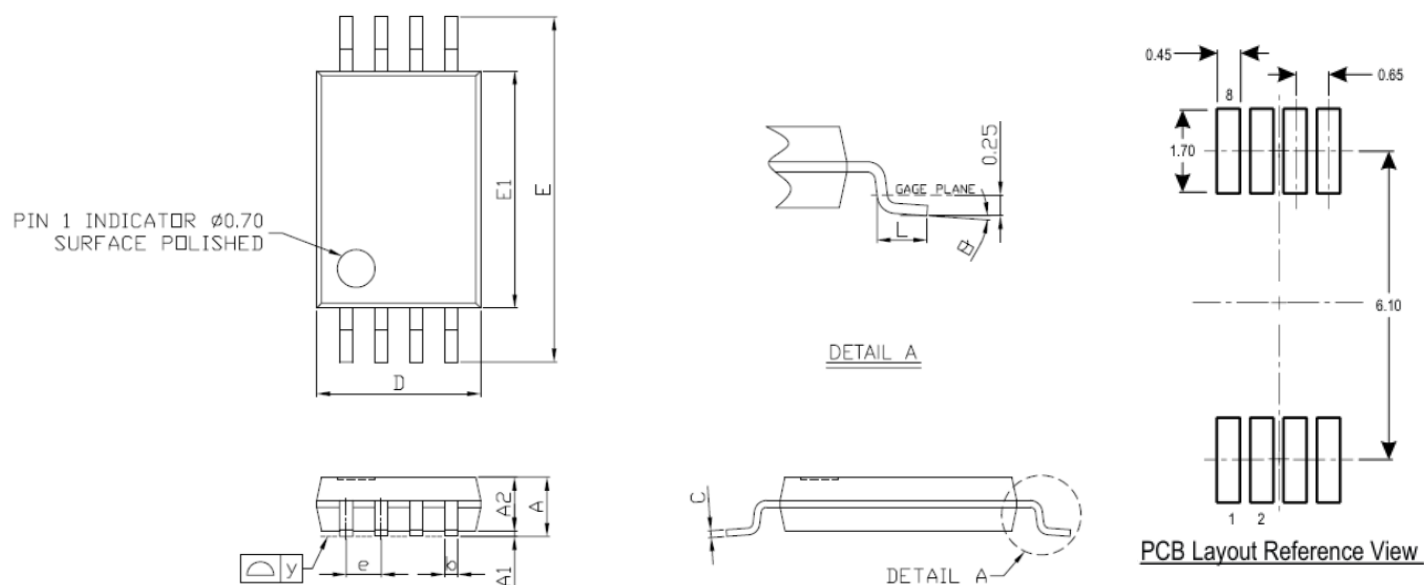
Figure 14: TSSOP-8 Package Drawing and Dimensions
Table 1: CT456 TSSOP-8 Package Dimensions

Symbol	Dimensions in Millimeters (mm)		
	Min.	Typ.	Max.
A	1.05	1.10	1.20
A1	0.05	0.10	0.15
A2	—	1.00	1.05
b	0.25	—	0.30
C	—	0.127	—
D	2.90	3.05	3.10
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e	—	0.65	—
L	0.50	0.60	0.70
y	—	—	0.076
θ	0°	4°	8°


TAPE AND REEL POCKET DRAWINGS AND DIMENSIONS

For Reference Only – Not for Tooling Use

Dimensions in millimeters – NOT TO SCALE

Dimensions exclusive of mold flash, gate burs, and dambar protrusions

Exact case and lead configuration at supplier discretion within limits shown

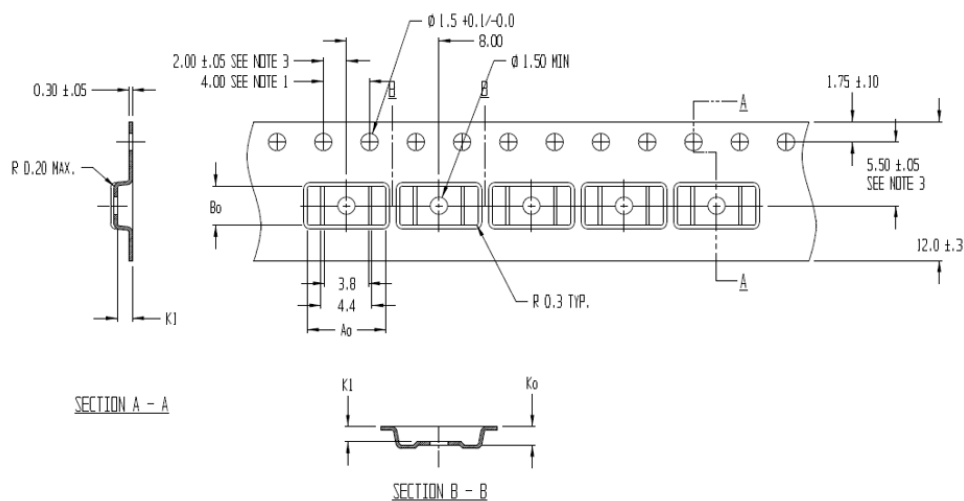

NOTES:

1. TO SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
2. CAMBER IN COMPLIANCE WITH EIA-481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

$A_0 = 6.80$
 $B_0 = 3.40$
 $K_0 = 1.60$
 $K_1 = 1.30$

Figure 15: Tape-and-Pocket Drawing for TSSOP-8 Package

DEVICE MARKINGS


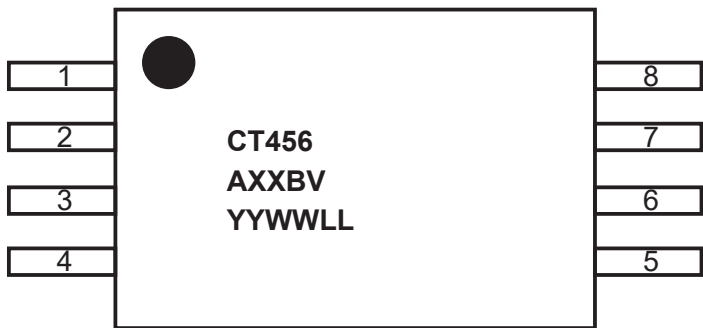


Figure 16: CT456 Device Marking
for 8-Lead TSSOP Package

Table 2: CT456 Device Marking Definition for 8-Lead TSSOP Package

Row No.	Code	Definition
1	•	Pin 1 Indicator
2	CT456	Allegro Part Number
3	A	Automotive Identifier
3	XX	Maximum Magnetic Field Rating
3	B	Sensing Polarity
3	V	Supply Voltage
4	YY	Calendar Year
4	WW	Work Week
4	LL	Lot Code

PART ORDERING NUMBER LEGEND

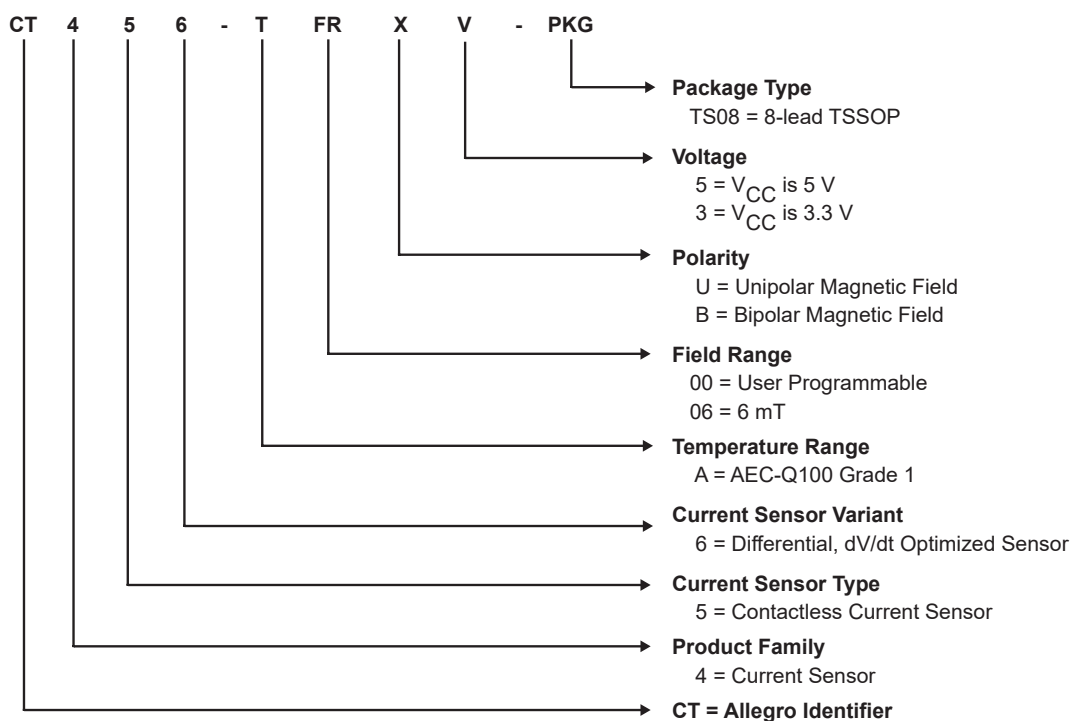

Revision History

Number	Date	Description
2	November 2, 2023	Document rebranded and minor editorial updates
3	February 29, 2024	Removed AEC-Q100 (pages 1, 2, 15); updated Offset Voltage (page 8); removed Out Accuracy Performance footnotes (pages 7-8); updated Sensitivity and removed Noise (page 8)
4	March 20, 2024	Updated Features and Benefits (page 1), Figure 3 and Terminal List (page 4)
5	July 29, 2024	Major overhaul to reflect automotive-qualified part per details provided in the new Testing and Quality Assurance section: changed user-programmable field range (page 1), preset magnetic field ranges (page 1) and all part numbers in the selection guide (page 2); removed evaluation board selection guide (page 2) and recommended external components table (page 4); changed application diagram (page 4) and electrical characteristics symbols for OUT capacitive load and OUT resistive load (page 6); removed voltage output quiescent and lifetime drift characteristics (page 6) and bandwidth performance plot (page 7); replaced device-specific electrical characteristic tables (pages 8 through 11); added Device Programming section (pages 12 through 14), Testing and Quality Assurance section (page 15), and 3.3 variant information in the Linear Output Current Measurement section (page 15); replaced current sensor position images (page 17); added PCB layout drawing (page 18); updated Device Markings section (page 20) and Part Ordering Number Legend section (page 21); and made minor editorial changes throughout (all pages), including removal of trailing zeros, reformatting of some images for readability (larger text), removal of archaic language (normal changed to typical), and minimization of the use of title case.

Copyright 2024, Allegro MicroSystems.

Allegro MicroSystems reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro's products are not to be used in any devices or systems, including but not limited to life support devices or systems, in which a failure of Allegro's product can reasonably be expected to cause bodily harm.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

Copies of this document are considered uncontrolled documents.

For the latest version of this document, visit our website:

www.allegromicro.com