

## AudioLarm II

CH-09-301-W(F)



### More Information

Chime Tone

 [Spec Sheet](#)

 [UL Recognized](#)

 RoHS Compliant

### Specifications

Revision: 7.18

Medium Loud Chime Tone; Fast Rate; Panel Mount Case and Wires Termination

|                                    |                                                                                                                                                  |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Mounting:</b>                   | Panel Mount                                                                                                                                      |
| <b>Operating Mode:</b>             | Medium Loud Fast Chime Tone                                                                                                                      |
| <b>Operating Voltage:</b>          | 220 Vac                                                                                                                                          |
| <b>Operating Frequency:</b>        |                                                                                                                                                  |
| <b>Typical Operating Current:</b>  | 40 mA at 220 Vac                                                                                                                                 |
| <b>Typical Sound Pressure:</b>     | 93±5 dB(A), at 220 Vac, at 24 inches (61 cm), at 25°C                                                                                            |
| <b>Termination:</b>                | Wires                                                                                                                                            |
| <b>Termination Strength:</b>       | Pull test with a maximum of 22 pounds (10 kg) load                                                                                               |
| <b>Operating Temperature:</b>      | -20_C to +65_C                                                                                                                                   |
| <b>Storage Temperature:</b>        | -40_C to +85_C                                                                                                                                   |
| <b>Surge Voltage:</b>              | 20% over maximum rated voltage for less than 5 minutes                                                                                           |
| <b>Reverse Voltage Protection:</b> | To the maximum operating voltage                                                                                                                 |
| <b>Construction Materials:</b>     | Internal Circuit- Audio-oscillator and piezoelectric driver<br>Potting- 2 parts epoxy resin or silicone, black<br>Diaphragm- Stainless Steel 304 |


**Gasket:**

**Environmental Durability:** ASTM B117 Certified - Withstands exposure to salt spray for 300 hours  
IP 68 Certified - Withstands water submergence and dust exposure  
Humidity- 95% relative humidity at +40\_C continuously for 100 hours.  
Vibration- Withstands vibration between 0 and 55 Hz. on all axes.

**Life Expectancy:** 10 years under normal operating conditions.

**Warranty:** For a period of two years from the date of manufacture under normal operating conditions.

[View Terms and Conditions of Sale](#)

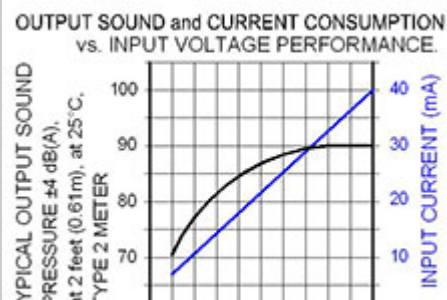

## Dimensions

