

## FS500E2 系列霍尔电流传感器

应用霍尔效应开环原理的电流传感器，能在电隔离条件下测量直流、交流、脉冲以及各种不规则波形的电流。


Open loop current sensor based on the principle of Hall-effect It can be used for measuring AC,DC,pulsed and mixed current.



电参数/Electrical characteristics								
	型号 Type	FS100E2	FS200E2	FS300E2	FS400E2	FS500E2	FS600E2	
$I_{PN}$	原边额定输入电流 Primary nominal input current	100	200	300	400	500	600	A
$I_p$	原边电流测量范围 Measuring range of primary current	0~±200	0~±400	0~+600	0~+800	0~+1000	0~±1000	A
$V_{SN}$	副边额定输出电压 Secondary nominal output voltage	4±1%						V
$V_c$	电源电压 Supply voltage	±12~±15(±5%)						V
$I_c$	电流消耗 Current consumption	$V_c=±15V$	<20					mA
$V_d$	绝缘电压 Insulation voltage	在原边与副边电路之间 2.5 KV 有效值/50Hz/1 分钟						
$e_L$	线性度 Linearity	<1						%FS
$V_0$	零点失调电压 Offset voltage	$T_A=25^{\circ}C$	<±10					mV
$V_{or}$	磁失调电压 Residual voltage	$I_{PN} \rightarrow 0$	<±10					mV
$V_{or}$	失调电压漂移 Thermal drift of V0	$I_p=0$ $T_A=-25\sim+85^{\circ}C$	<±0.5					mV/°C
$T_r$	响应时间 Response time	≤5						μs
f	频带宽度(-3dB) Frequency bandwidth(-3dB)	DC~20						kHz
$T_A$	工作环境温度 Ambient operating temperature	-40~+125						°C
$T_s$	贮存环境温度 Ambient storage temperature	-40~+150						°C
$R_L$	负载电阻 Load resistance	≥10K						Ω

标准 Standard	GI/FS-0105	
----------------	------------	--

外形尺寸 (mm) /Dimensions of drawing(mm)

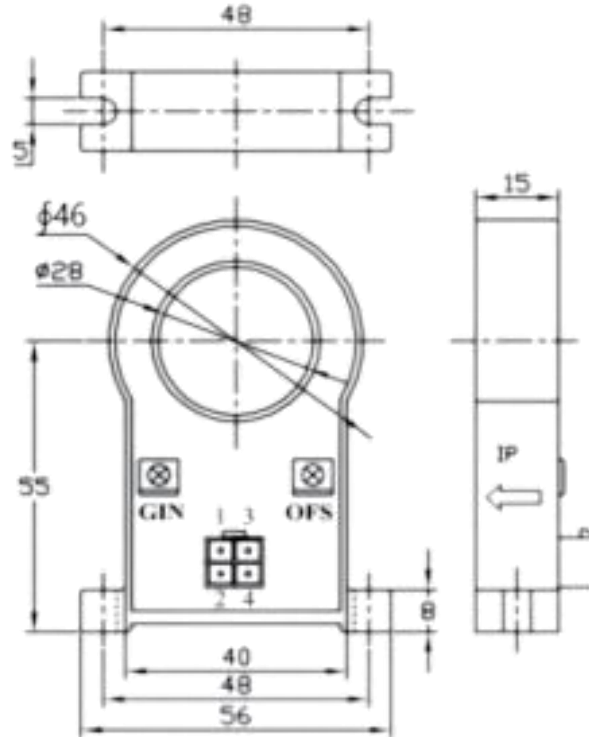

引脚说明: 1,+15V/+12V 2,-15V-12V 3,Vout 4,GND OFS零点调节 GIN 幅度调节

Elucidation: 1,+15V/+12V 2,-15V-12V 3,Vout 4,GND OFS zero adjustment GIN amplitude adjustment

使用说明/Remarks

- 错误的接线可能导致传感器损坏。传感器通电后，当被测电流从传感器箭头方向穿过，即可在输出端测得同相电压值。  
Incorrect wiring may cause damage to the sensor. After the sensor is powered on, when the measured current passes through the arrow direction of the sensor, the in-phase voltage value can be measured at the output end.
- 传感器的输出幅度可根据用户需求进行适当的调节。  
The output amplitude of the sensor can be adjusted according to the user's needs.
- 可按用户需求定制不同额定输入电流和输出电压的传感器。  
Sensors with different rated input current and output voltage can be customized according to user requirements.