

Over-Voltage Protection Load Switch with Surge Protection

Features

- Highly reliable FCQFN 1.6mm×1.2mm-12L package and FOPLP 1.6mm×1.2mm-12B package
- Surge protection
 - IEC 61000-4-5: 80V
- Integrated low R_{dson} nFET switch: typical 29mΩ
- 5A continuous current capability
- Default Over-Voltage Protection threshold
 - AW32915C: 6.8V
- OVP threshold adjustable range: 4V to 24V
- Input system ESD protection
 - IEC 61000-4-2 Contact discharge: ±8kV
 - IEC 61000-4-2 Air gap discharge: ±15kV
- Input voltage: 32V_{DC}
- Fast turn-off response: typical 50ns
- Over-Temperature Protection (OTP)
- Under-Voltage Lockout (UVLO)

Applications

- Smartphones
- Tablets
- Charging Ports

General Description

AW3291XC family OVP load switch features surge protection, an internal clamp circuit protects the device from surge voltages up to 80V.

AW3291XC features an ultra-low 29mΩ (typ.) R_{dson} nFET load switch. When input voltage exceeds the OVP threshold, the switch is turned off very fast to prevent damage to the protected downstream devices. The IN pin is capable of withstanding fault voltages up to 32V_{DC}.

The default OVP threshold is 6.8V (AW32915C), the OVP threshold can be adjusted from 4V to 24V through external OVLO pin.

The device features an open-drain output ACOKB, when $V_{IN_UVLO} < V_{IN} < V_{IN_OVLO}$ and the switch is on, ACOKB will be driven low to indicate a good power input, otherwise it is high impedance.

This device features over-temperature protection that prevents itself from thermal damaging.

Typical Application Circuit

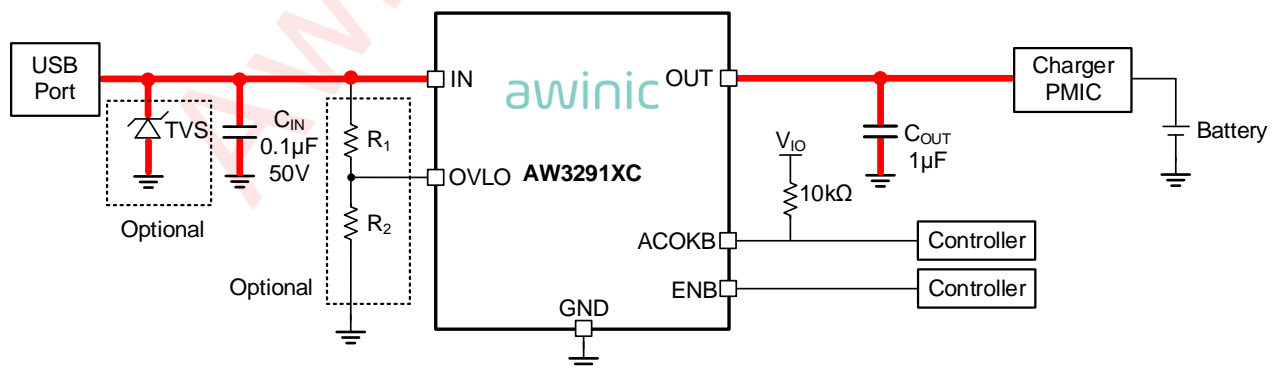


Figure 1 AW3291XC Typical Application Circuit

R_1 and R_2 are used for OVP threshold adjustment, to use default OVP threshold, connect OVLO to ground.

Pin Configuration And Top Mark

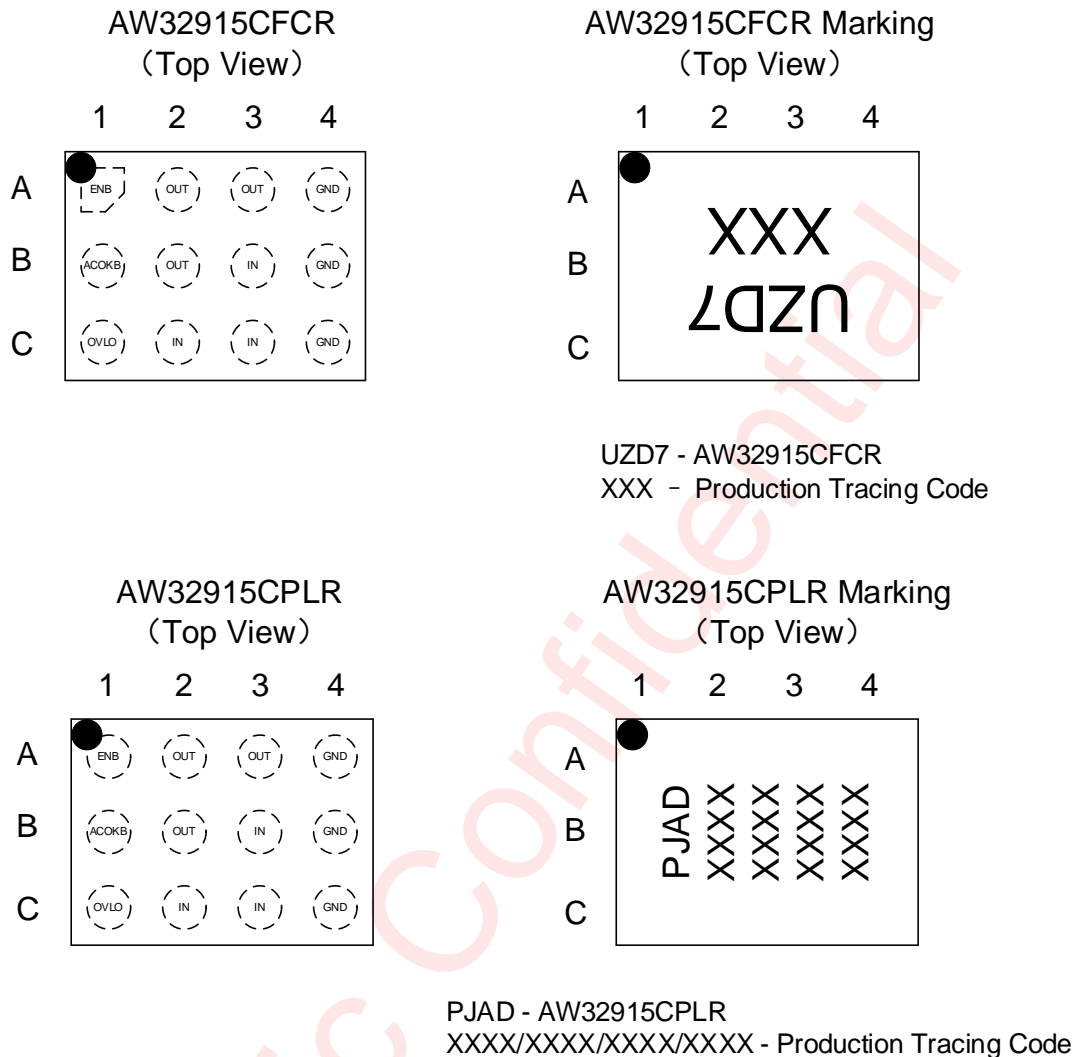


Figure 2 Pin Configuration and Top Mark

Pin Definition

No.	NAME	DESCRIPTION
A1	ENB	Enable pin, active low
B1	ACOKB	Power good flag, active-low, open-drain output. When $V_{IN_UVLO} < V_{IN} < V_{IN_OVLO}$, ACOKB is pulled low, otherwise it's hi-Z state
C1	OVLO	OVP threshold adjustment pin
C2, C3, B3	IN	Switch input and device power supply
A2, A3, B2	OUT	Switch output
A4, B4, C4	GND	Device ground

Functional Block Diagram

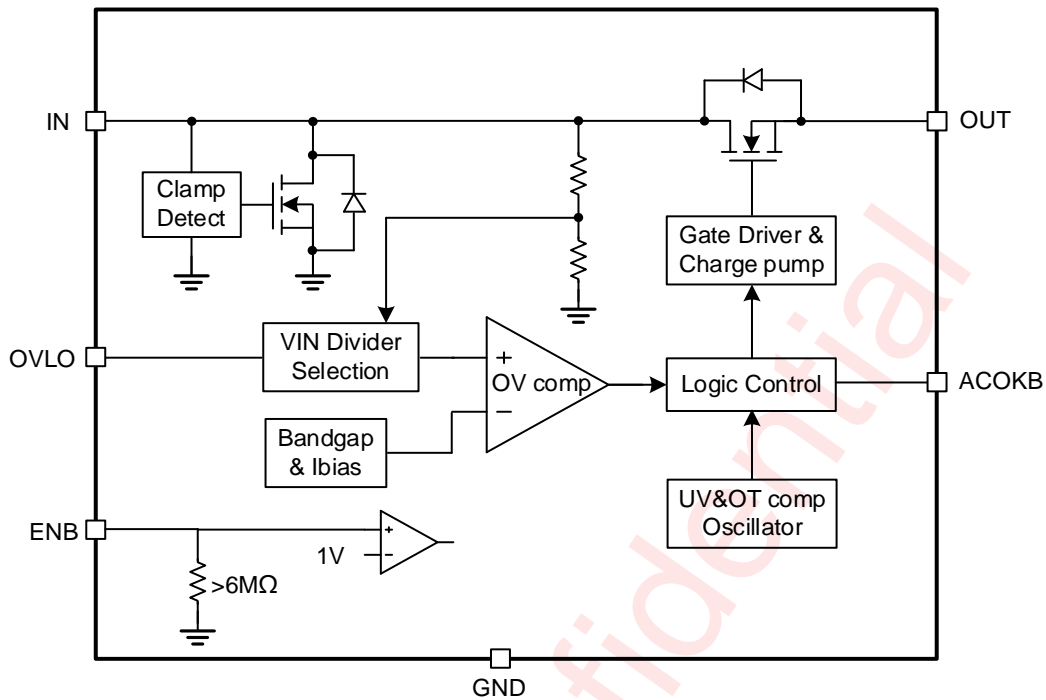


Figure 3 Functional Block Diagram

Typical Application Circuits

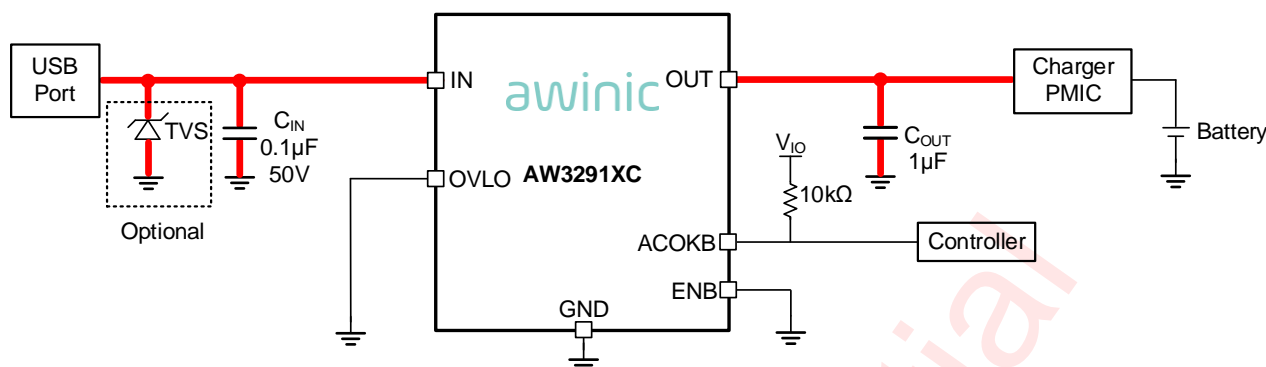


Figure 4 AW3291XC Typical Application Circuit(Using Default OVP Threshold)

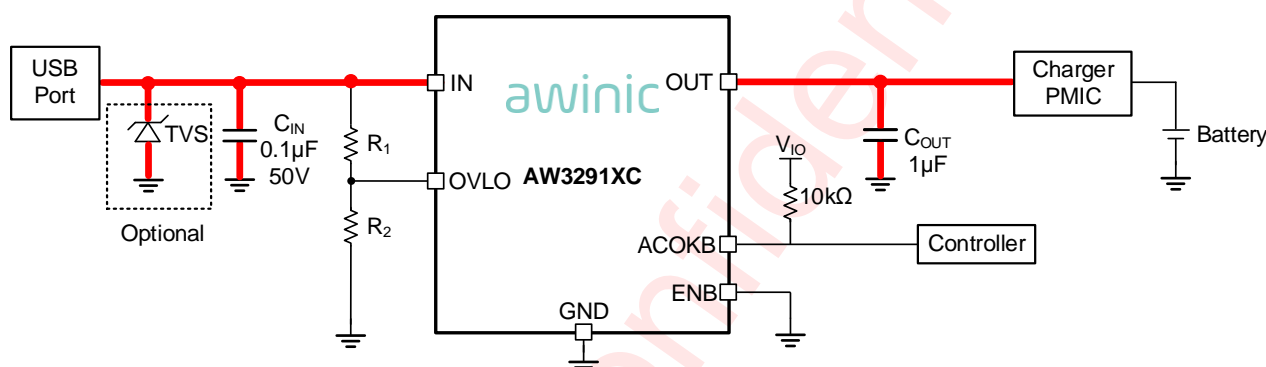


Figure 5 AW3291XC Typical Application Circuit(Using External Resistors Set OVP Threshold)

Notice for typical application circuits:

1. If VBUS is required to pass surge voltage greater than 80V, external TVS is needed, the maximum clamping voltage of the TVS should be below 32V.
2. When the default OVP threshold is used, connect OVLO pin to GND directly or through a 0Ω resistor. **OVLO pin cannot be left floating.**
3. If R₁ and R₂ are used to adjust the OVP threshold, it is better to use 1% precision resistors to improve the OVP threshold precision.
4. If ACOKB is not used, it can be left floating, or short to GND.
5. C_{IN} = 0.1µF is recommended for typical application, larger C_{IN} is also acceptable. The rated voltage of C_{IN} should be larger than the TVS maximum clamping voltage, if no TVS is applied and only AW3291XC is used, the rated voltage of C_{IN} should be 50V.
6. C_{OUT} = 1µF is recommended for typical application, larger C_{OUT} is also acceptable. The rated voltage of C_{OUT} should be larger than the OVP threshold. For example, if the OVP threshold is 6.8V, the rated voltage of C_{OUT} should be 10V or higher.

Ordering Information

Part Number	Temperature	Package	Marking	Moisture Sensitivity Level	Environmental Information	Delivery Form
AW32915 CFCR	-40°C ~ 85°C	FCQFN 1.6mm×1.2mm -12L	UZD7	MSL1	ROHS+HF	4500 units/ Tape and Reel
AW32915 CPLR	-40°C ~ 85°C	FOPLP 1.6mm×1.2mm -12B	PJAD	MSL1	ROHS+HF	3000 units/ Tape and Reel

Awinic Confidential

Absolute Maximum Ratings (NOTE 1)

Symbol	Parameter	Condition	Min.	Max.	Unit
V _{IN}	Input voltage		-0.3	32	V
V _{OUT}	Output voltage		-0.3	See ^(NOTE 2)	V
V _{OVLO}	OVLO voltage		-0.3	6	V
V _{ACOKB}	ACOKB voltage		-0.3	6	V
V _{ENB}	ENB voltage		-0.3	6	V
I _{SW}	Continuous current of switch IN-OUT ^(NOTE 3)	Continuous current on IN and OUT pin		5	A
I _{PEAK}	Peak current	Peak input and output current on IN and OUT pin(10ms)		8	A
I _{DIODE}	Continuous diode current	Continuous forward current through the nFET body diode		1.5	A
T _A	Ambient temperature		-40	85	°C
T _J	Junction temperature		-40	150	°C
T _{STG}	Storage temperature		-65	150	°C
T _{LEAD}	Soldering temperature	At leads, 10 seconds		260	°C

NOTE1: Conditions out of those ranges listed in “absolute maximum ratings” may cause permanent damages to the device. In spite of the limits above, functional operation conditions of the device should within the ranges listed in “recommended operating conditions”. Exposure to absolute-maximum-rated conditions for prolonged periods may affect device reliability.

NOTE2: 32V or V_{IN}+0.3V, whichever is smaller.

NOTE3: Limited by thermal design.

Thermal Information

Symbol	Parameter	Condition	Value		Unit
R _{θJA}	Thermal resistance from junction to ambient ^(NOTE 1)	In free air	FCQFN 1.6mm×1.2mm -12L	65	°C/W
			FOPLP 1.6mm×1.2mm -12B	65	°C/W

NOTE1: Thermal resistance from junction to ambient is highly dependent on PCB layout.

ESD and Latch-up Ratings

Symbol	Parameter	Condition	Value	Unit
V _{ESD}	IEC61000-4-2 system ESD on IN pin with 0.1μF C _{IN}	Contact discharge	±8	kV
		Air gap discharge	±15	kV
	Human Body Model	ESDA/JEDEC JS-001-2023	±2	kV
	Charged Device Model	ESDA/JEDEC JS-002-2022	±1.5	kV
I _{Latch-up}	Latch-up	JESD78F	±200	mA

Recommended Operating Conditions

Symbol	Parameter	Min.	Typ.	Max.	Unit
V _{IN}	Input DC voltage	2.8		28	V
C _{IN}	Input capacitance		0.1		μF
C _{OUT}	Output load capacitance		1	100	μF

Electrical Characteristics

$T_A = -40^{\circ}\text{C}$ to 85°C unless otherwise noted. Typical values are guaranteed for $V_{IN} = 5\text{V}$, $C_{IN} = 0.1\mu\text{F}$, $I_{IN} \leq 5\text{A}$ and $T_A = 25^{\circ}\text{C}$.

Symbol	Description	Test Conditions	Min.	Typ.	Max.	Units
V_{IN_CLAMP}	Input clamp voltage	$I_{IN} = 10\text{mA}$		32.8		V
R_{dson}	Switch on resistance	$V_{IN} = 5\text{V}$, $I_{OUT} = 1\text{A}$, $T_A = 25^{\circ}\text{C}$		29		m Ω
I_Q	Input quiescent current	$V_{IN} = 5\text{V}$, $V_{OVLO} = 0\text{V}$, $I_{OUT} = 0\text{A}$		88		μA
I_{IN_OVLO}	Input current at over-voltage condition	$V_{IN} = 5\text{V}$, $V_{OVLO} = 3\text{V}$, $V_{OUT} = 0\text{V}$		78		μA
V_{OVLO_TH}	OVLO set threshold		1.16	1.20	1.24	V
V_{OVLO_RNG}	OVLO threshold adjustable range		4		24	V
V_{OVLO_SEL}	External OVLO select threshold	OVLO rising		0.16		V
I_{OVLO}	OVLO pin leakage current	$V_{OVLO} = V_{OVLO_TH}$	-0.2		0.2	μA
Protection						
V_{IN_OVLO}	OVP trip level	V_{IN} rising	6.66	6.80	6.94	V
		Hysteresis		0.14		
V_{IN_UVLO}	UVLO trip level	V_{IN} rising		2.65	2.8	V
		Hysteresis		0.1		
T_{SDN}	Shutdown temperature			150		$^{\circ}\text{C}$
T_{SDN_HYS}	Shutdown temperature hysteresis			20		$^{\circ}\text{C}$

Electrical Characteristics (Continued)

$T_A = -40^{\circ}\text{C}$ to 85°C unless otherwise noted. Typical values are guaranteed for $V_{IN} = 5\text{V}$, $C_{IN} = 0.1\mu\text{F}$, $I_{IN} \leq 5\text{A}$ and $T_A = 25^{\circ}\text{C}$.

Symbol	Description	Test Conditions	Min.	Typ.	Max.	Units
Digital Logical Interface						
V_{OL}	ACOKB output low voltage	$I_{SINK} = 1\text{mA}$			0.4	V
I_{LEAK_ACOKB}	ACOKB leakage current	$V_{IO} = 5\text{V}$, ACOKB de-asserted	-0.5		0.5	μA
V_{IH}	ENB input high voltage		1.2			V
V_{IL}	ENB input low voltage				0.5	V
I_{LEAK_ENB}	ENB leakage current	$V_{ENB} = 5\text{V}$	0		2	μA
Timing Characteristics (Figure 6)						
t_{DEB}	Debounce time	From $V_{IN} > V_{IN_UVLO}$ to 10% V_{OUT}		10		ms
t_{START}	Start-up time	From $V_{IN} > V_{IN_UVLO}$ to ACOKB low		20		ms
t_{ON}	Switch turn-on time	$R_L = 100\Omega$, $C_L = 22\mu\text{F}$, V_{OUT} from 10% V_{IN} to 90% V_{IN}		0.8		ms
t_{OFF}	Switch turn-off time	$C_L = 0\mu\text{F}$, $R_L = 100\Omega$, $V_{IN} > V_{IN_OVLO}$ to V_{OUT} stop rising, V_{IN} rise at $10\text{V}/\mu\text{s}$		50		ns

Timing Diagram

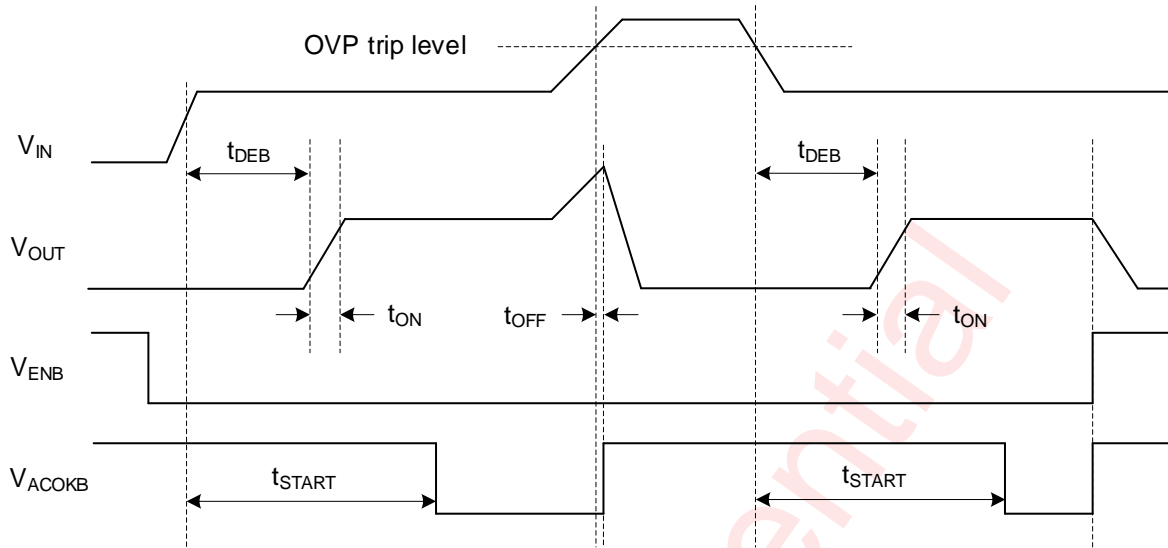


Figure 6 Timing Diagram

Typical Characteristics

$V_{IN} = 5V$, $V_{ENB} = 0V$, $V_{OVLO} = 0V$, $C_{IN} = 0.1\mu F$, $C_{OUT} = 1\mu F$, and $T_A = 25^\circ C$ unless otherwise specified.

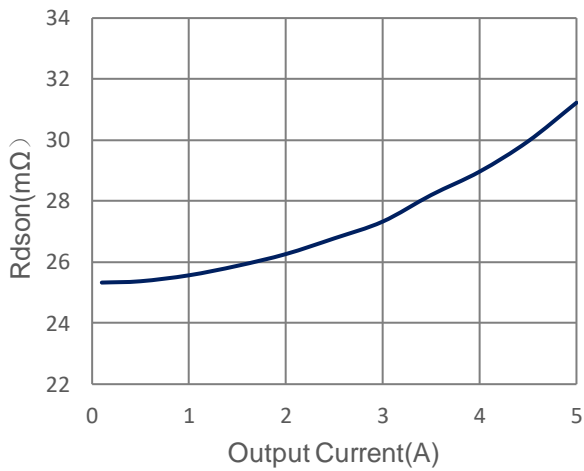


Figure 7 R_{dson} vs. Output Current

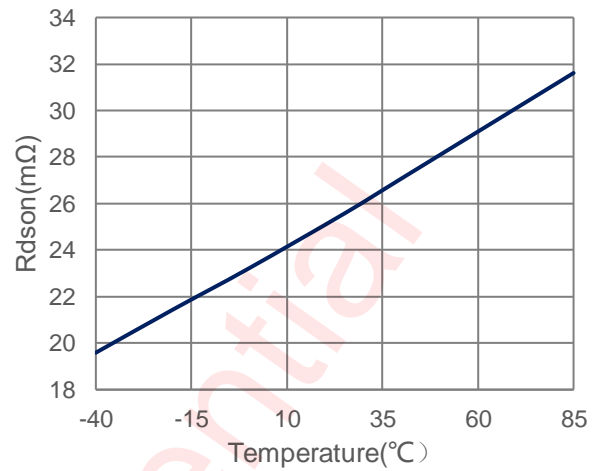


Figure 8 R_{dson} vs. Temp. ($I_{OUT} = 1A$)

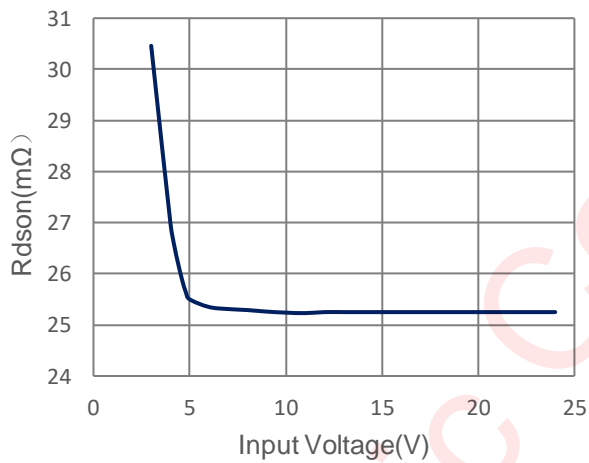


Figure 9 R_{dson} vs. Input Voltage ($I_{OUT} = 1A$)

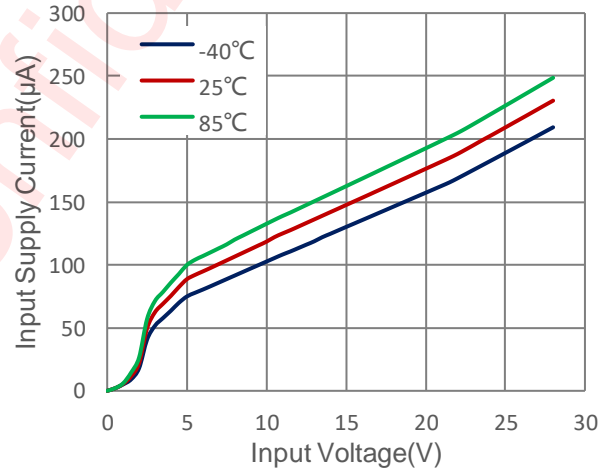


Figure 10 Input Supply Current vs. Supply Voltage

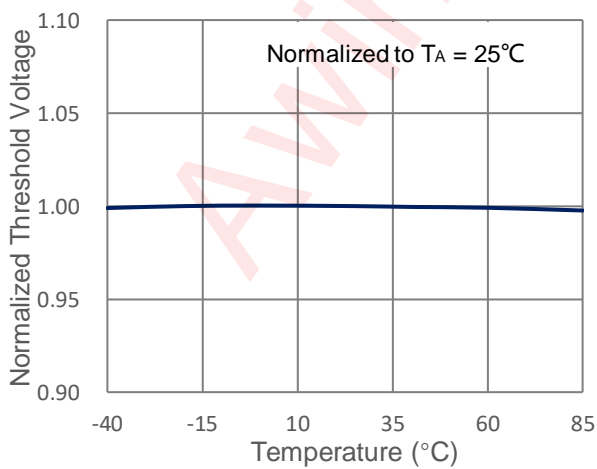


Figure 11 Normalized Internal OVP Threshold vs. Temp.

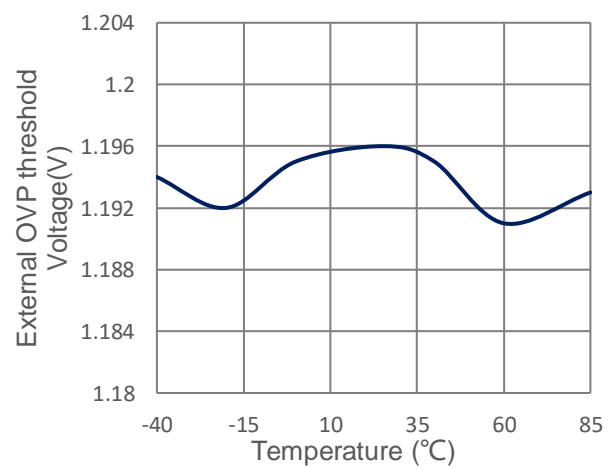


Figure 12 OVLO Set Threshold vs. Temp.

Typical Characteristics (Continued)

$V_{IN} = 5V$, $V_{ENB} = 0V$, $V_{OVLO} = 0V$, $C_{IN} = 0.1\mu F$, $C_{OUT} = 1\mu F$, and $T_A = 25^\circ C$ unless otherwise specified.

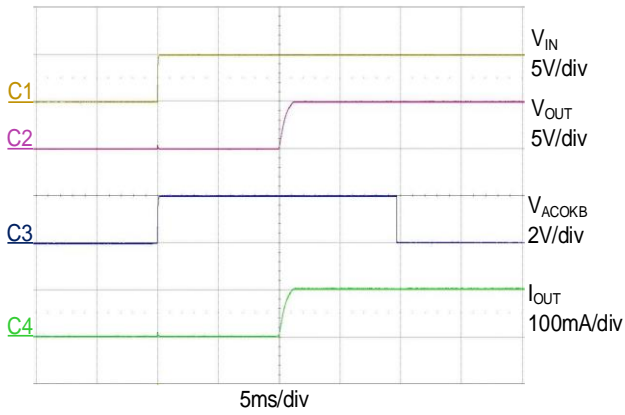


Figure 13 Power-up ($C_{OUT} = 1\mu F$, 100mA load)

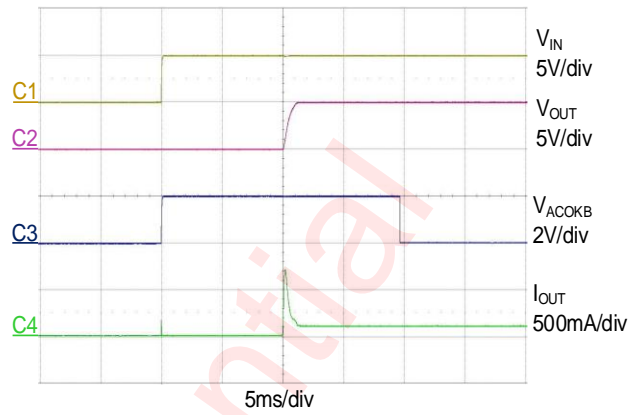


Figure 14 Power-up ($C_{OUT} = 100\mu F$, 100mA load)

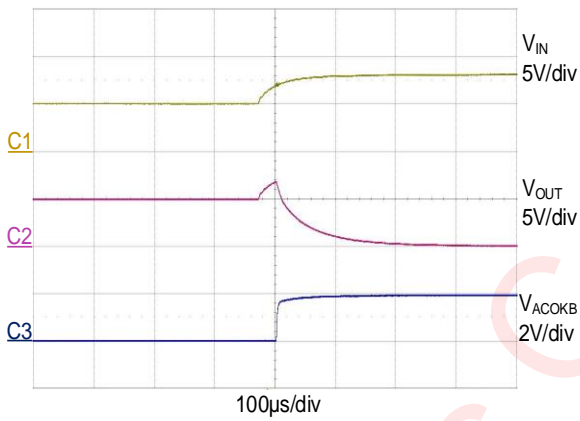


Figure 15 OVP Response

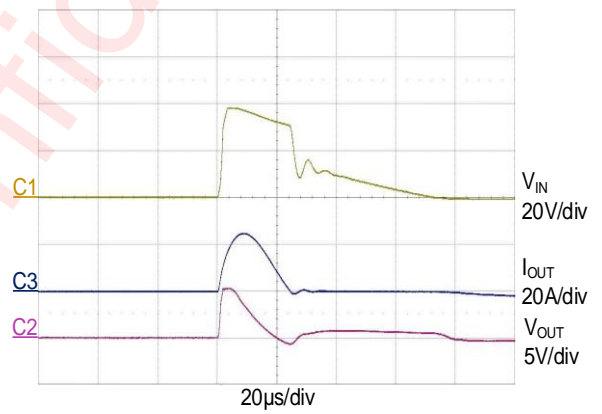


Figure 16 90V Surge Response($R_L=50\Omega$)

Functional Description

Device Operation

If the AW3291XC is enabled and the input voltage is between UVLO and OVP threshold, the internal charge pump begins to work after debounce time, the gate of the nFET switch will be slowly charged high till the switch is fully on. ACOKB will be driven low about 20ms after V_{IN} valid, indicating the switch is on with a good power input. If the input voltage exceeds the OVP trip level, the switch will be turned off in about 50ns. If ENB is pulled high, or input voltage falls below UVLO threshold, or over-temperature happens, the switch will also be turned off.

Surge Protection

The AW3291XC integrates a clamp circuit to suppress input surge voltage. For surge voltages between V_{IN_OVLO} and V_{IN_CLAMP} , the switch will be turned off but the clamp circuit will not work. For surge voltages greater than V_{IN_CLAMP} , the internal clamp circuit will detect surge voltage level and discharge the surge energy to ground. The device can suppress surge voltages up to 80V.

Over-Voltage Protection

If the input voltage exceeds the OVP rising trip level, the switch will be turned off in about 50ns. The switch will remain off until V_{IN} falls below the OVP falling trip level.

OVP Threshold Adjustment

If the default OVP threshold is used, OVLO pin must be grounded. If OVLO pin is not grounded, and by connecting external resistor divider to OVLO pin as shown in the typical application circuit, between IN and GND, the OVP threshold can be adjusted as following:

$$V_{IN_OVLO} = \frac{R_1 + R_2}{R_2} V_{OVLO_TH}$$

For example, if we select $R_1 = 1M\Omega$ and $R_2 = 100k\Omega$, then the new OVP threshold calculated from the above formula is 13.2V. The OVP threshold adjustment range is from 4V to 24V. When the OVLO pin voltage V_{OVLO} exceeds V_{OVLO_SEL} (0.16V typical), V_{OVLO} is compared with the reference voltage V_{OVLO_TH} (1.2V typical) to judge whether input supply is over-voltage.

ACOKB Output

The device features an open-drain output ACOKB, it should be connected to the system I/O rail through a pull-up resistor. If the device is enabled and $V_{IN_UVLO} < V_{IN} < V_{IN_OVLO}$, ACOKB will be driven low indicating the switch is on with a good power input. If OVP, UVLO, or OT occurs, or ENB is pulled high, the switch will be turned off and ACOKB will be pulled high.

USB On-The-Go (OTG) Operation

If $V_{IN} = 0V$ and OUT is supplied by OTG voltage, the body diode of the load switch conducts current from OUT to IN and the voltage drop from OUT to IN is approximately 0.7V. When $V_{IN} > V_{IN_UVLO}$, internal charge pump begins to open the load switch after debounce time (about 10ms). After switch is fully on, current is supplied through switch channel and the voltage drop from OUT to IN is minimum.


PCB Layout Consideration

To make fully use of the performance of AW3291XC, the guidelines below should be followed.


1. All the peripherals should be placed as close to the device as possible. Place the input capacitor C_{IN} on the top layer (same layer as the AW3291XC) and close to IN pin, and place the output capacitor C_{OUT} on the top layer (same layer as the AW3291XC) and close to OUT pin.
2. If external TVS is used, IN pin routing passes through the external TVS firstly, and then connect AW3291XC.
3. Red bold paths on figure 4 and 5 are power lines that will flow large current, please route them on PCB as straight, wide and short as possible.
4. If R_1 and R_2 are used, route OVLO line on PCB as short as possible to reduce parasitic capacitance.
5. The power trace from USB connector to AW3291XC may suffer from ESD event, keep other traces away from it to minimize possible EMI and ESD coupling.
6. Use rounded corners on the power trace from USB connector to AW3291XC to decrease EMI coupling.

Tape And Reel Information

FCQFN 1.6mm×1.2mm -12L

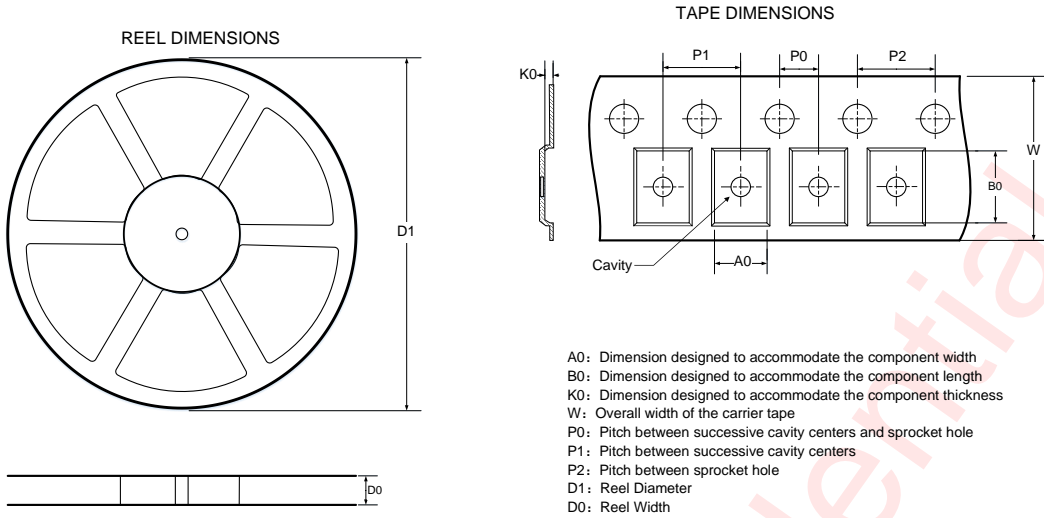

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

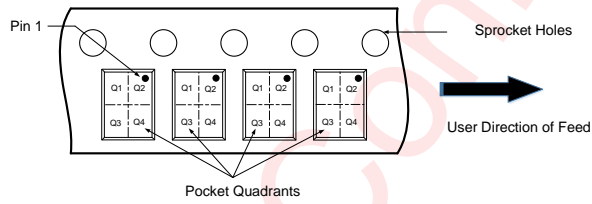


Note: The above picture is for reference only. Please refer to the value in the table below for the actual size


All Dimensions are nominal

D1 (mm)	D0 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
178.00	8.40	1.35	1.75	0.70	2	4	4	8	Q2

FOPLP 1.6mmx1.2mm -12B

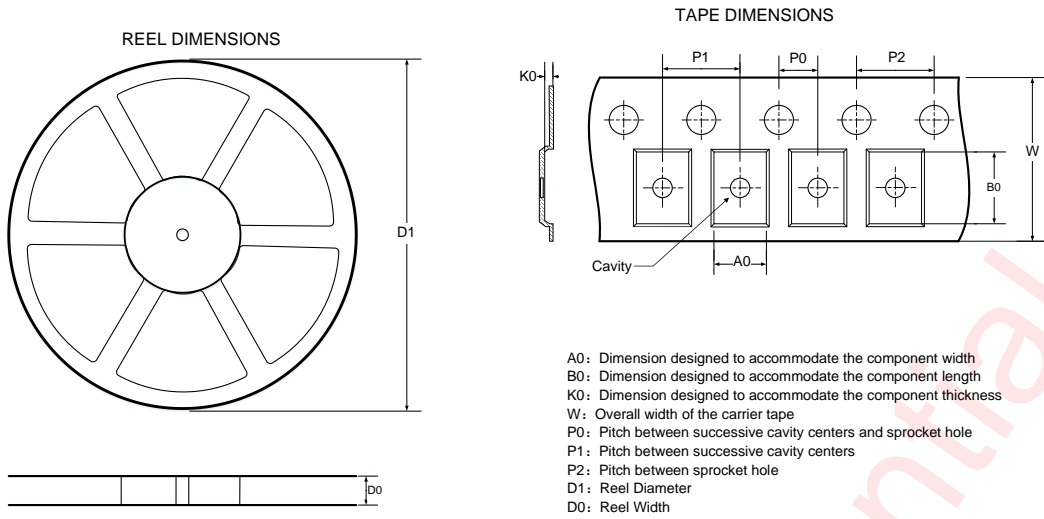

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

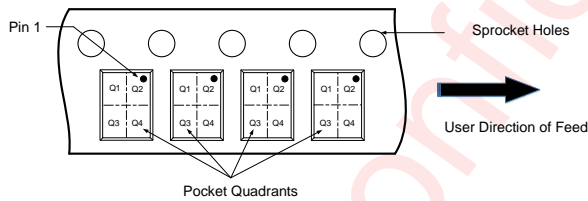


Note: The above picture is for reference only. Please refer to the value in the table below for the actual size

All Dimensions are nominal

D1 (mm)	D0 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
178.00	8.40	1.41	1.82	0.75	2	4	4	8	Q2

Package Description


FCQFN 1.6mmx1.2mm -12L

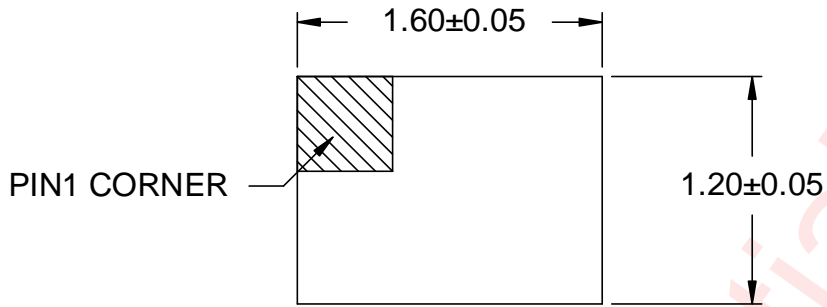

Top View




Side View

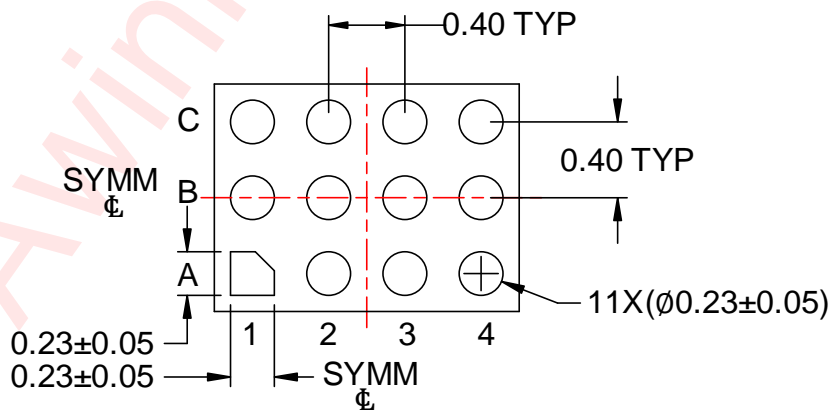


Bottom View

Unit:mm


FOPLP 1.6mmx1.2mm -12B

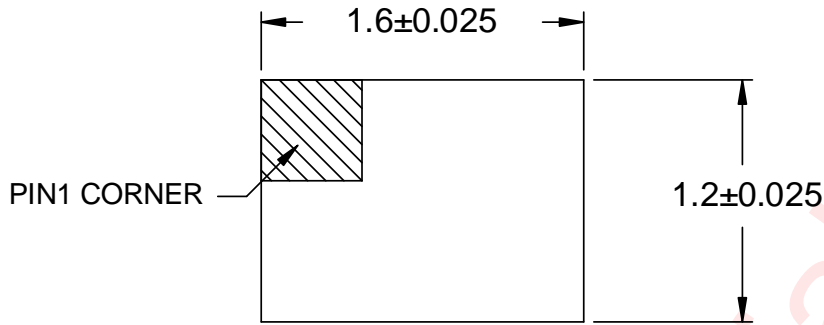

Top View

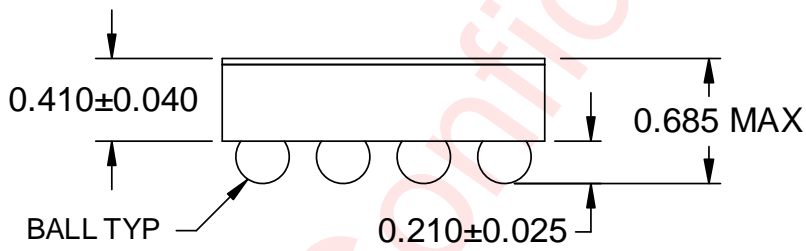




Side View

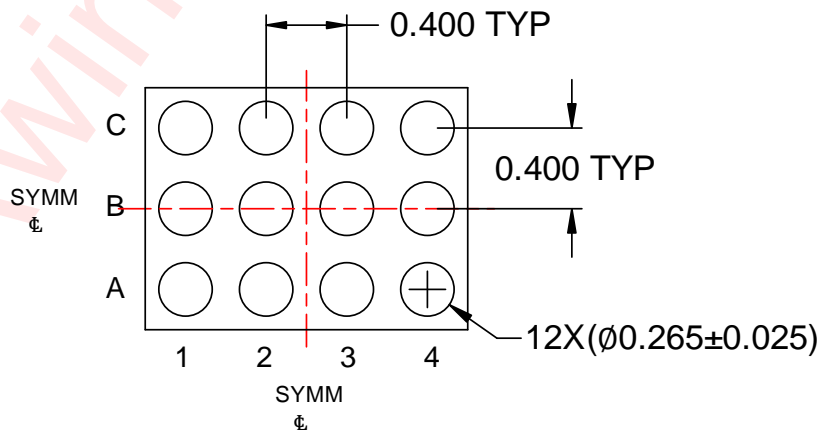

Bottom View

Unit:mm

Land Pattern Data

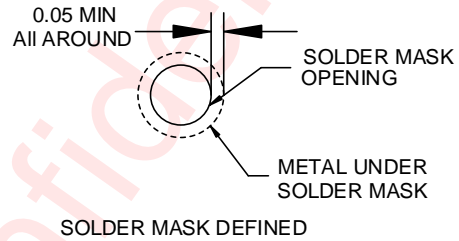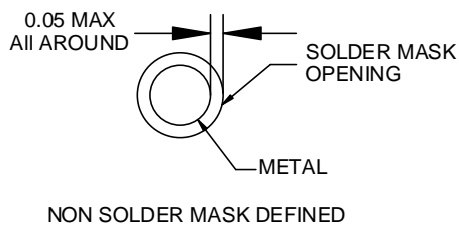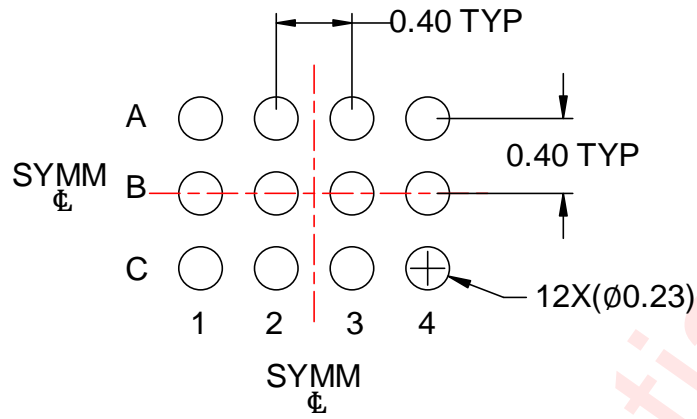

Unit: mm

Revision History

Version	Date	Change Record
V1.0	Sep. 2025	Officially released
V1.1	Nov. 2025	Add AW32915CPLR
V1.2	Feb. 2026	Update Absolute Maximum Ratings(P6).

Awinic Confidential

Disclaimer

All trademarks are the property of their respective owners. Information in this document is believed to be accurate and reliable. However, Shanghai AWINIC Technology Co., Ltd (AWINIC Technology) does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

AWINIC Technology reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. Customers shall obtain the latest relevant information before placing orders and shall verify that such information is current and complete. This document supersedes and replaces all information supplied prior to the publication hereof.

AWINIC Technology products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an AWINIC Technology product can reasonably be expected to result in personal injury, death or severe property or environmental damage. AWINIC Technology accepts no liability for inclusion and/or use of AWINIC Technology products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications that are described herein for any of these products are for illustrative purposes only. AWINIC Technology makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

All products are sold subject to the general terms and conditions of commercial sale supplied at the time of order acknowledgement.

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Reproduction of AWINIC information in AWINIC data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. AWINIC is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of AWINIC components or services with statements different from or beyond the parameters stated by AWINIC for that component or service voids all express and any implied warranties for the associated AWINIC component or service and is an unfair and deceptive business practice. AWINIC is not responsible or liable for any such statements.