

OM SENI

SOD-123 Fast Switching Diodes

Features

- Fast Switching Device ($T_{RR} < 4\text{nS}$)
- Power Dissipation of 400mW
- High Stability and High Reliability
- Low reverse leakage



Applications

Small signal switching
Ultra high speed switching application

Mechanical Data

- Case: SOD-123
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end

Function Diagram

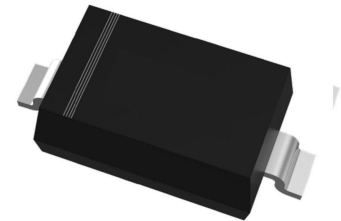

SOD-123

1N4148W

Reverse Voltage
100 V

Forward Current
0.15 Ampere

Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Maximum repetitive peak reverse voltage	V_{RRM}	V	100
Maximum RMS Voltage	V_{RMS}	V	75
Reverse Breakdown voltage @ $I_R=100\mu\text{A}$	$V_{(BR)R}$	V	100
Maximum Average Forward Rectified Current	$I_{F(AV)}$	mA	150
Repetitive peak forward current	I_{FRM}	mA	300
Non-Repetitive Peak forward surge current @ $t_p=1\mu\text{s}$	I_{FSM}	A	2.0
Non-Repetitive Peak forward surge current @ $t_p=1\text{s}$			0.5
Power Dissipation	P_d	mW	400
Storage temperature	T_{stg}	°C	-55 ~ +150
Junction temperature	T_j	°C	-55 ~ +150
Typical thermal resistance	$R_{\theta J-A}$	°C /W	315

OM SENI

Electrical Characteristics (Ta=25°C Unless otherwise noted)

PARAMETER	TEST CONDITIONS	SYMBOL	UNIT	Min	Type	Max
Maximum instantaneous forward voltage	$I_F=1.0\text{mA}$	V_F	V	—	—	0.715
	$I_F=10\text{mA}$			—	—	0.855
	$I_F=50\text{mA}$			—	—	1.0
	$I_F=150\text{mA}$			—	—	1.25
Reverse Leakage Current	$V_R=20\text{V}$	I_{R1}	nA	—	—	25
	$V_R=75\text{V}$	I_{R2}	μA	—	—	1.0
Total capacitance	$V_R=0\text{V}, f=1\text{MHz}$	C_T	pF	—	—	4.0
Maximum reverse recovery time	$I_F=I_R=10\text{mA}, I_{rr}=0.1 \times I_R, R_L=100\Omega$	T_{rr}	ns	—	—	4.0

Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

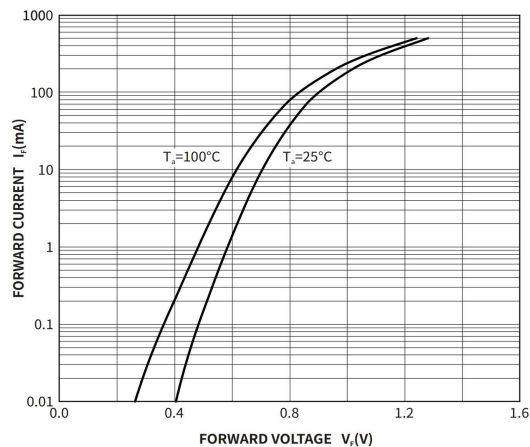


Fig.1 Typical Instantaneous Forward Characteristics

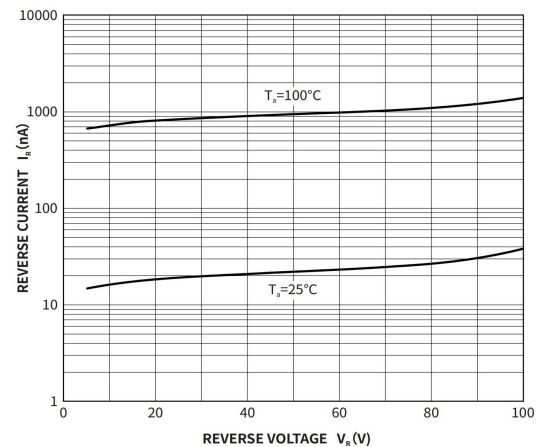


Fig.2 Typical Reverse Characteristics

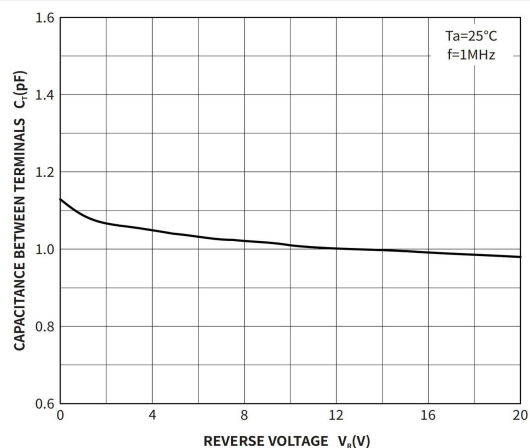


Fig.3 Typical Junction Capacitance

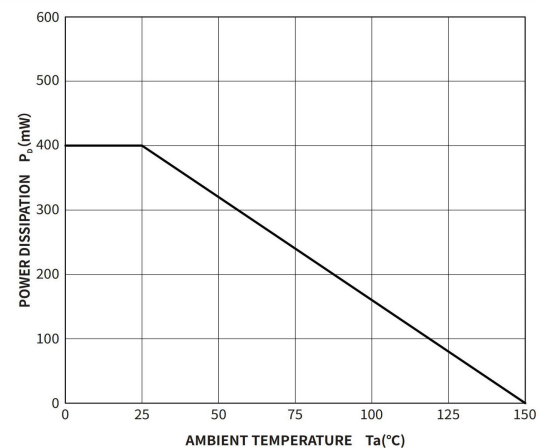


Fig.4 Power Derating Curve


OM SENI

Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOD-123	R1	0.012	3000	45000	180000	7"

Package Outline Dimensions (SOD-123)

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	3.55	3.85	0.140	0.152
B	2.55	2.85	0.100	0.112
C	1.40	1.80	0.055	0.071
D	0.95	1.35	0.140	0.152
E	0.51	0.71	0.037	0.053
F	-	0.15	-	0.006
G	0.15	0.45	0.006	0.008
H	0.08	0.25	0.003	0.010
θ	-	8°	-	8°

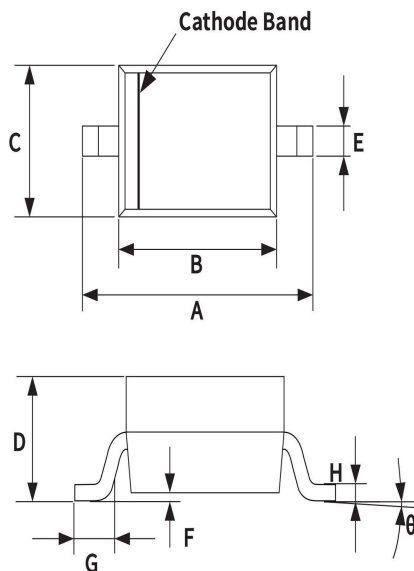

Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.91	-	0.036	-
K	-	2.36	-	0.092
M	1.22	-	0.048	-

