

GRF5613

3.5 Watt Power Amplifier 1350 to 1627 MHz

FEATURES

- Flexible Biasing Provides Latitude for Linearity Optimization
- 185 mA Native Mode Quiescent Current Consumption
- 5 V Supply Voltage
- 50 Ω Single-ended Input and Output Impedance
- Digital Shutdown
- Rugged Design is Extremely Resilient to Mismatched Loads
- -40 to 85 °C Operating Temperature Range
- Compact 3 x 3 mm QFN-16 Package

Reference: 5 V / 185 mA I_{CCQ} / 1400 MHz

- Gain: 24.5 dB
- OP1dB: 35.4 dBm
- Evaluation Board Noise Figure: 3.5 dB

APPLICATIONS

- Customer Premises Equipment
- Military Radio
- Drones


DESCRIPTION


The GRF5613 is a high gain, two-stage InGaP HBT Power Amplifier designed to deliver 35.4 dBm output power at P1dB over the 1350 to 1627 MHz band.

Please consult with the GRF applications engineering team for custom tuning/evaluation board data.

Additional tunes can be found on the GRF5613 "Custom Tunes" product page: [GRF5613 Custom Tunes](#)

BLOCK DIAGRAM

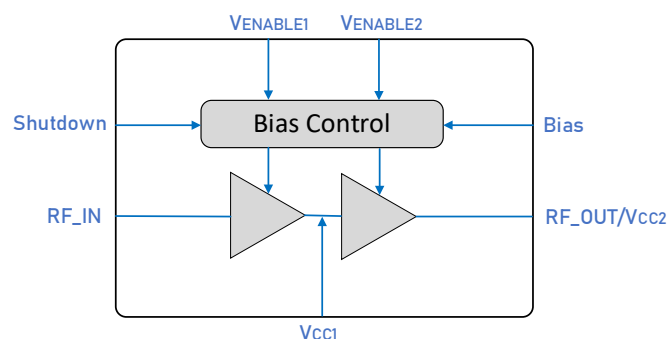

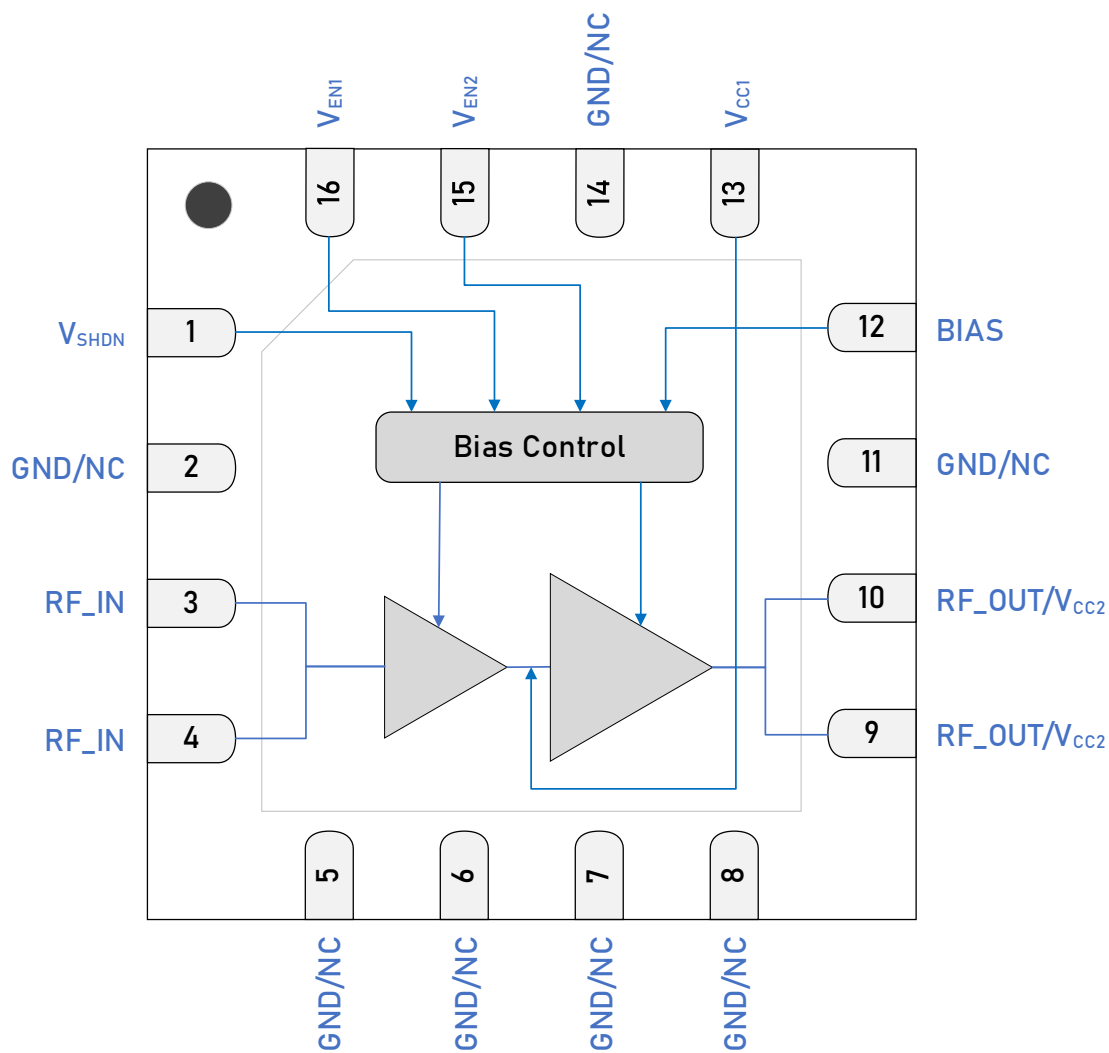

3 x 3 mm QFN-16 Pin Out (Top View)

Pin Assignments

Pin	Name	Description	Note
1	V _{SHDN}	Digital Shutdown	V _{SHDN} ≥ 1.8 V (Logic HIGH) disables device. V _{SHDN} ≤ 0.8 V (Logic LOW) enables device.
2, 5, 6, 7, 8, 11, 14	GND/NC	Ground or No Connect	No internal connection to die. These pins can be left unconnected or be connected to ground (recommended). Use a via as close to the pin as possible if grounded.
3, 4	RF_IN	RF Input	Pins 3 and 4 tied together on system board. An external DC blocking capacitor must be used.
9, 10	RF_OUT/V _{CC2}	PA Output/Bias Voltage	Pins 9 and 10 tied together on system board. V _{CC2} must be applied to this pin via an RF choke.
12	Bias	Bias Circuit Supply	Connect to V _{CC2} through external resistor.
13	V _{CC1}	Bias Voltage	Connect to V _{CC1} through external inductor or 0 Ω resistor.
15	V _{EN2}	Enable2 Voltage Input	V _{EN2} and series resistor set I _{CCQ} for the output stage. V _{EN2} ≤ 0.2 volts disables stage 2.
16	V _{EN1}	Enable1 Voltage Input	V _{EN1} and series resistor set I _{CCQ} for the input stage. V _{EN1} ≤ 0.2 volts disables stage 1.
PKG BASE	GND	Ground	Provides DC and RF ground for the amplifier, as well as thermal heat sink. Recommend multiple 8-mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.

Absolute Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V_{CC}	3	5.25	V
RF Input Power: 50 Ω , $V_{CC} = 5$ V, CW tone, 100% duty cycle, $T_{PKG\ BASE} = 25$ °C.	$P_{IN\ MAX} - 1:1$		20	dBm
RF Input Power: Load VSWR $\leq 8:1$, all phase angles, $V_{CC} = 5$ V, CW tone, 100% duty cycle, $T_{PKG\ BASE} = -40$ to 85 °C.	$P_{IN\ MAX} - 8:1$		10	dBm
Operating Temperature (package base).	$T_{PKG\ BASE}$	-40	85	°C
Maximum Junction Temperature (MTTF > 10 ⁶ hours).	$T_{J\ MAX}$		190	°C
Maximum Dissipated Power Stage 1 (DC only, no RF applied).	$P_{DISS\ MAX}$		750	mW
Maximum Dissipated Power Stage 2 (DC only, no RF applied).	$P_{DISS\ MAX}$		1350	mW
Shutdown Voltage	V_{SHDN}		* 5.25	V

Electrostatic Discharge

Human Body Model	HBM	750		V
------------------	-----	-----	--	---

Storage

Storage Temperature	T_{STG}	-65	150	°C
Moisture Sensitivity Level	MSL		1	--

* $M4 = 0\ \Omega$. $V_{SHDN} = 5.25$ V yields $I_{SHDN} = 540\ \mu A$. I_{SHDN} decreases linearly vs. V_{SHDN} (to 65 μA with $V_{SHDN} = 1.8$ V). Said linear relationship can be used to scale $M4$ for higher V_{SHDN} voltage: use the pin condition $V_{SHDN_pin}/I_{SHDN} = 2.4V / 147\ \mu A$.

Calculate $M4$ for $V_{SHDN}/I_{SHDN} = 5V / 147\ \mu A$: $M4 = (5-2.4) / (0.000147) = 17.7\ k\Omega$.



Caution! ESD Sensitive Device.

Exceeding Absolute Maximum Rating conditions may cause permanent damage.

Note: For additional information, please refer to [Manufacturing Note MN-001 — Package and Manufacturing Information](#).



All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging requiring no exemptions. Additional information for this topic can be found at this link - [Environmental and Restricted Substance Statement Library](#)

Recommended Operating Conditions

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Voltage	V _{CC}	3	5	5.25	V	
RF Frequency Range	F _{RF}	1350	1400	1450	MHz	Typical application schematic using the 1350 to 1450 MHz tuning set (notes 1 & 2).
Operating Temperature (package base)	T _{PKG BASE}	-40		85	°C	
RF_IN Port Impedance	Z _{RF_IN}		50		Ω	Single-ended with 3 element match.
RF_OUT Port Impedance	Z _{RF_OUT}		50		Ω	Single-ended with 3 element match.

Note 1: Operation outside of this range is supported by using different custom tunes. Examples of other optimized tunes can be found here: [GRF5613 Custom Tunes](#)

Note 2: Contact the Guerrilla RF applications team for guidance on optimizing the tuning of the device for alternative bands.

Nominal Operating Parameters – General

The following conditions apply unless noted otherwise: typical application schematic using the 1350 - 1450 MHz tuning set. $V_{CC} = 5\text{ V}$, $V_{SHDN} = \text{LOW}$, $I_{CCQ} = 185\text{ mA}$, $M5 = 15\text{ k}\Omega$, $M9 = 10.2\text{ k}\Omega$, $F_{TEST} = 1400\text{ MHz}$, $50\text{ }\Omega$ system impedance, $T_{PKG\text{ BASE}} = 25\text{ }^{\circ}\text{C}$. Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Current (Quiescent)	I_{CCQ}		185		mA	$I_{CCQ1} + I_{CCQ2}$. No RF applied.
Enable Current 1	$I_{ENABLE1}$		0.2		mA	$V_{CC}/V_{EN1}/V_{EN2} = 5\text{ V}$. $V_{SHDN} = 0\text{ V}$.
Enable Current 2	$I_{ENABLE2}$		0.3		mA	$V_{CC}/V_{EN1}/V_{EN2} = 5\text{ V}$. $V_{SHDN} = 0\text{ V}$.
Operating Temperature Range	$T_{PKG\text{ BASE}}$	-40		85	$^{\circ}\text{C}$	Measured on package base.
Logic Input LOW	V_{IL}	0		0.8	V	Applies to V_{SHDN} Input.
Logic Input HIGH	V_{IH}	1.8		V_{CC}	V	Applies to V_{SHDN} Input.
Logic Current LOW	I_{IL}		1.3		nA	Applies to V_{SHDN} Input, $V_{IL} = 0.8\text{ V}$.
Logic Current HIGH	I_{IH}		65		μA	Applies to V_{SHDN} Input, $V_{IH} = 1.8\text{ V}$.
			285			Applies to V_{SHDN} Input, $V_{IH} = 3.3\text{ V}$.
Switching Rise Time	T_{RISE}		30		ns	Applies to V_{SHDN} Input.
Switching Fall Time	T_{FALL}		30		ns	Applies to V_{SHDN} Input.

Disabled Mode

Supply Current (Quiescent)	$I_{CCQ\text{-SHDN}}$		10		μA	$V_{CC} = 5\text{ V}$, $V_{SHDN}/V_{EN1}/V_{EN2} = \text{HIGH}$.
Enable Current 1	$I_{ENABLE1\text{-SHDN}}$		0.3		mA	$V_{CC} = 5\text{ V}$, $V_{SHDN}/V_{EN1}/V_{EN2} = \text{HIGH}$.
Enable Current 2	$I_{ENABLE2\text{-SHDN}}$		0.5		mA	$V_{CC} = 5\text{ V}$, $V_{SHDN}/V_{EN1}/V_{EN2} = \text{HIGH}$.

Thermal Data (Stage 1 and Stage 2)

Stage 1: Thermal Resistance (Infrared Scan). DC only, no RF applied.	Θ_{JC}		60		$^{\circ}\text{C}/\text{W}$	On standard evaluation board.
Stage 2: Thermal Resistance (Infrared Scan). DC only, no RF applied.	Θ_{JC}		28		$^{\circ}\text{C}/\text{W}$	On standard evaluation board.
Thermal Data Stage 1 and 2: see plot of junction temp vs. output power.	T_J				$^{\circ}\text{C}$	$V_{CC}/V_{EN1}/V_{EN2} = 5\text{ V}$. On standard evaluation board (note 3).



Note 3: MTTF > 10^6 hours for $T_J \leq 190\text{ }^{\circ}\text{C}$.

Nominal Operating Parameters – RF



The following conditions apply unless noted otherwise: typical application schematic using the 1350 - 1450 MHz tuning set. $V_{CC} = 5\text{ V}$, $V_{SHDN} = \text{LOW}$, $I_{CCQ} = 185\text{ mA}$, $M5 = 15\text{ k}\Omega$, $M9 = 10.2\text{ k}\Omega$, $F_{TEST} = 1400\text{ MHz}$, $50\ \Omega$ system impedance, $T_{PKG\text{ BASE}} = 25\text{ }^{\circ}\text{C}$. Evaluation board losses are included within the specifications.


Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Small Signal Gain	S21		24.5		dB	$V_{CC} = 5\text{ V}$, $F_{TEST} = 1400\text{ MHz}$, $P_{IN} = -25\text{ dBm}$.
Standby Mode Gain	S21 _{STBY}		-29		dB	Disabled Mode: $V_{SHDN}/V_{EN1}/V_{EN2} = \text{HIGH}$, $P_{IN} = 0\text{ dBm}$.
Input Return Loss	S11		< -9		dB	$F_{RF} = 1350\text{ to }1450\text{ MHz}$.
Output Return Loss	S22		< -6		dB	$F_{RF} = 1350\text{ to }1450\text{ MHz}$.
Reverse Isolation	S12		< -46		dB	$F_{RF} = 1350\text{ to }1450\text{ MHz}$.
Noise Figure	NF		3.5		dB	On standard evaluation board.
Output 1 dB Compression Power	OP1dB		35.4		dBm	$V_{CC} = 5\text{ V}$, sine wave input.

GRF5613 Typical Operating Curves: 1350 to 1450 MHz Tune

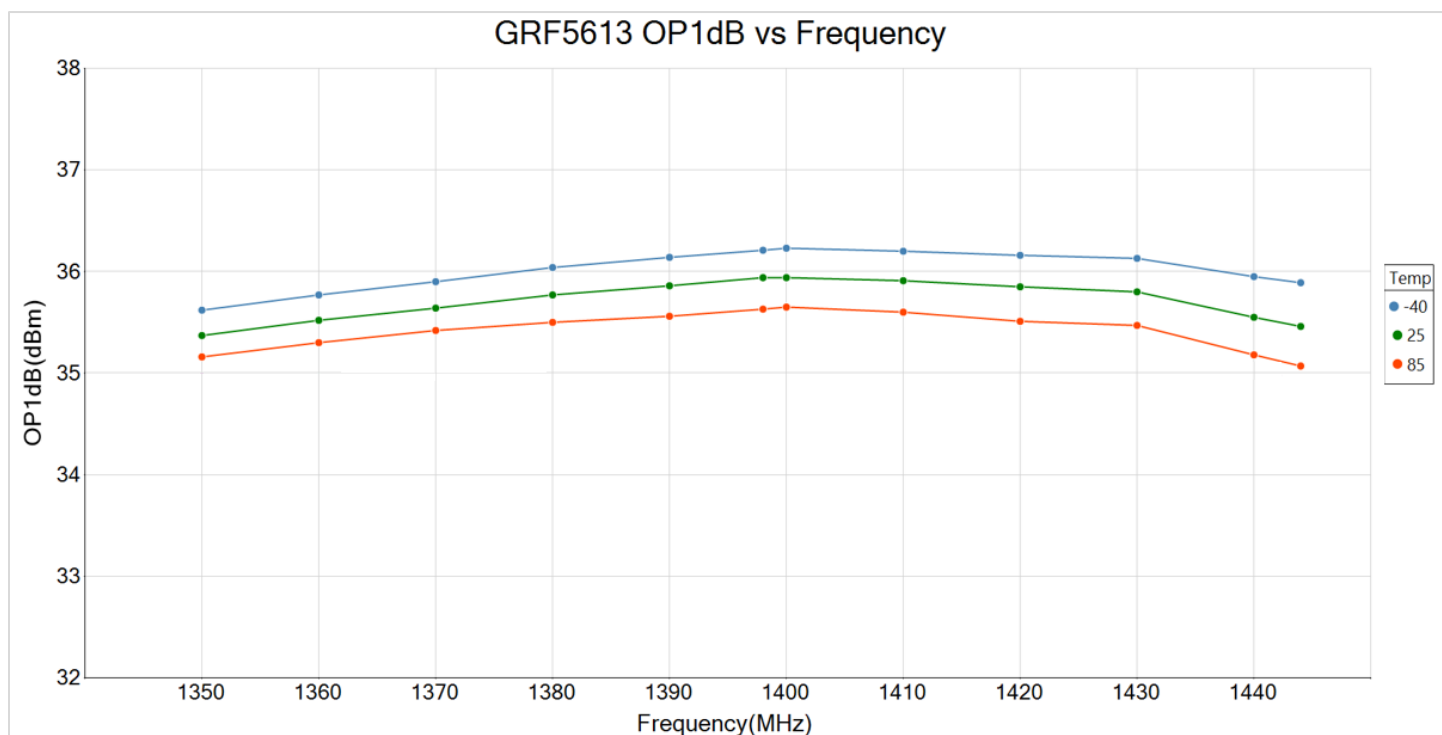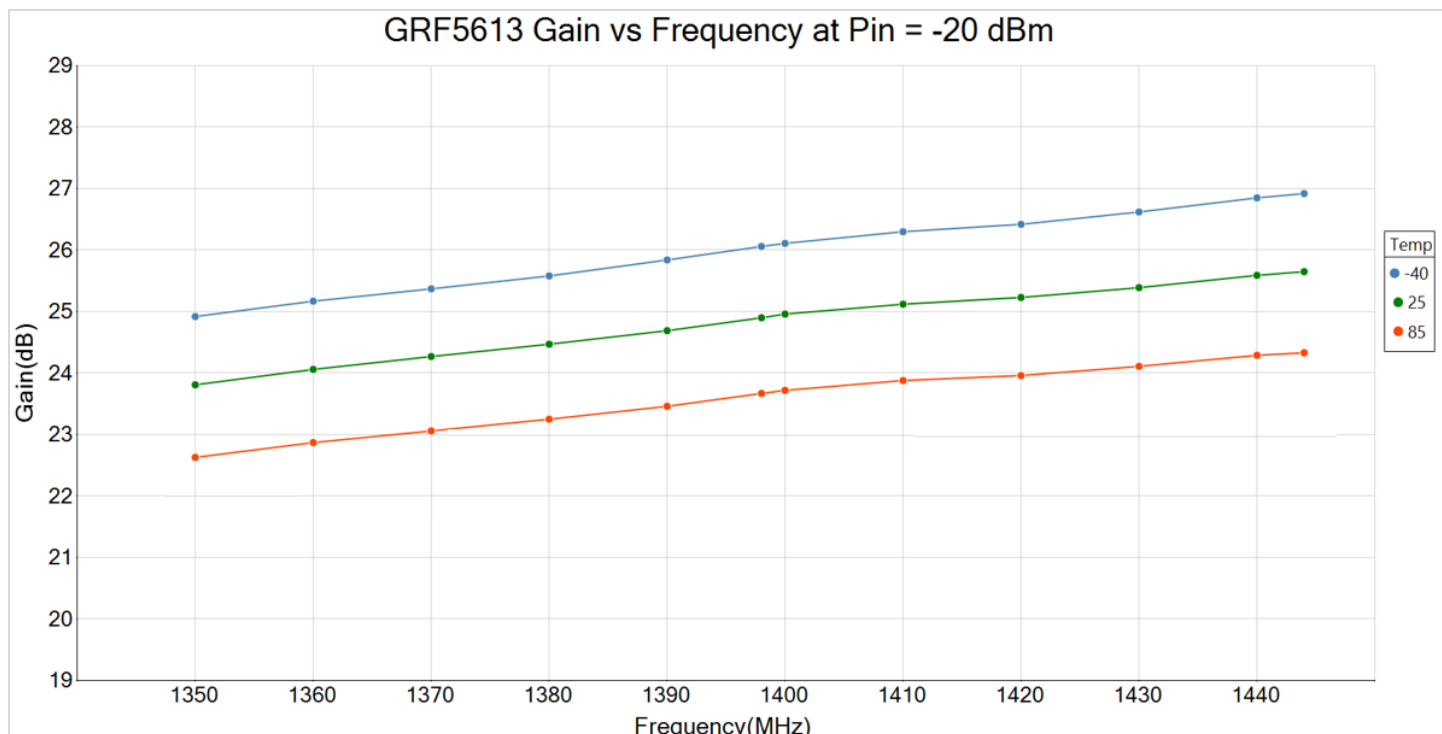


GRF5613 Typical Operating Curves: 1350 to 1450 MHz Tune

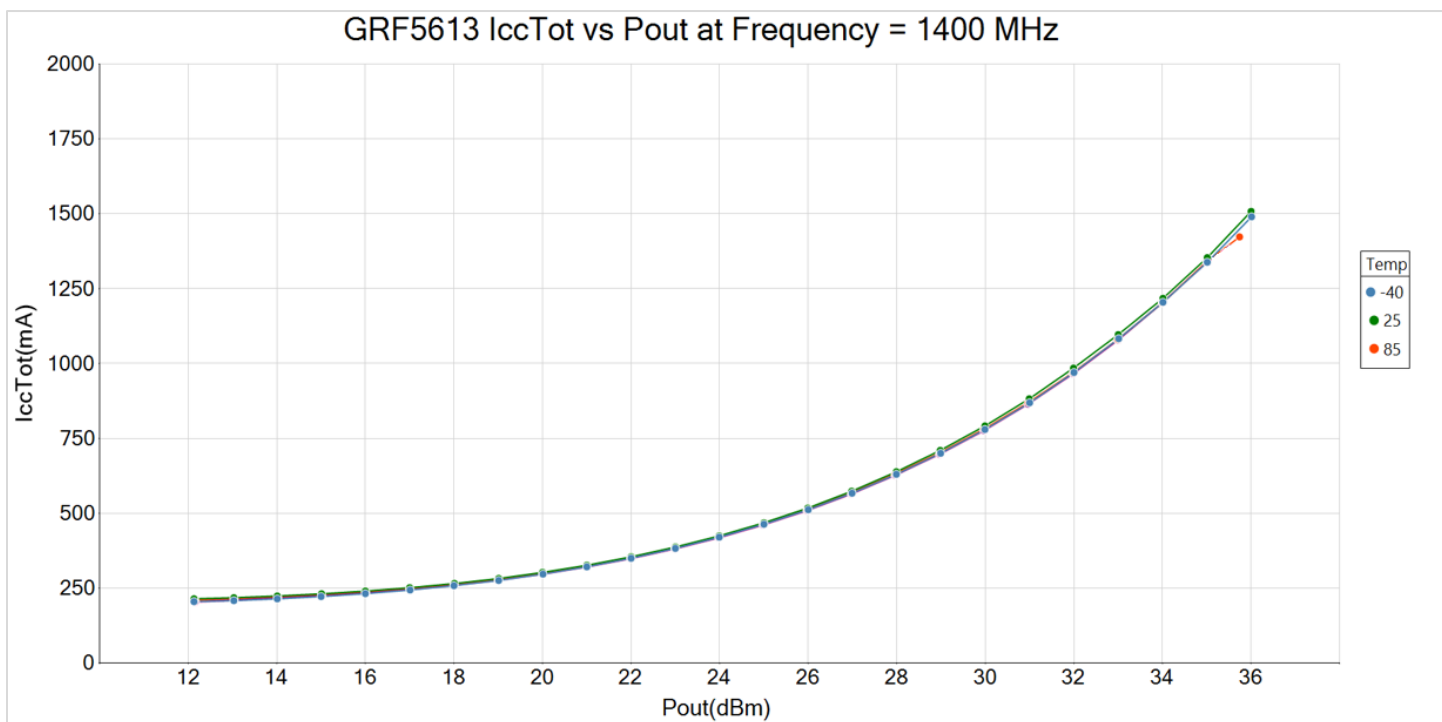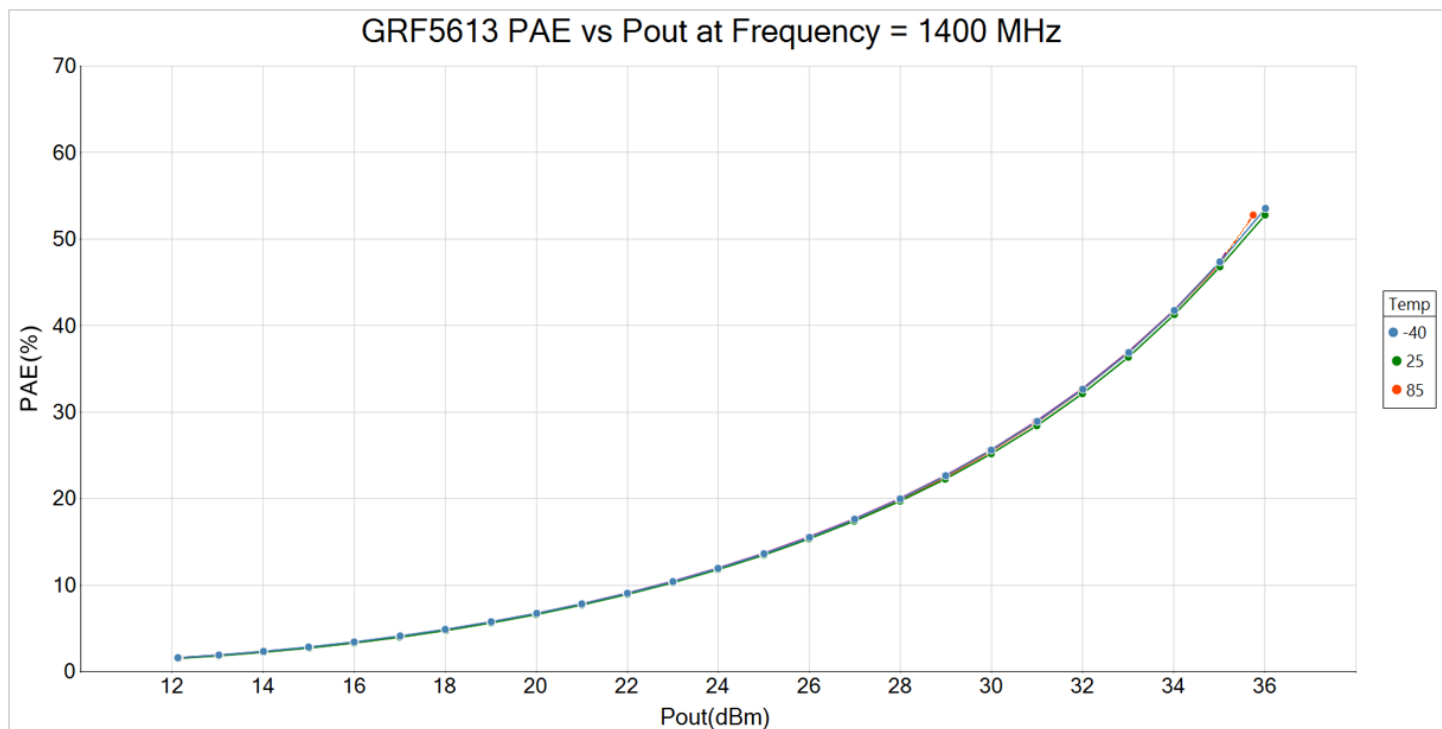

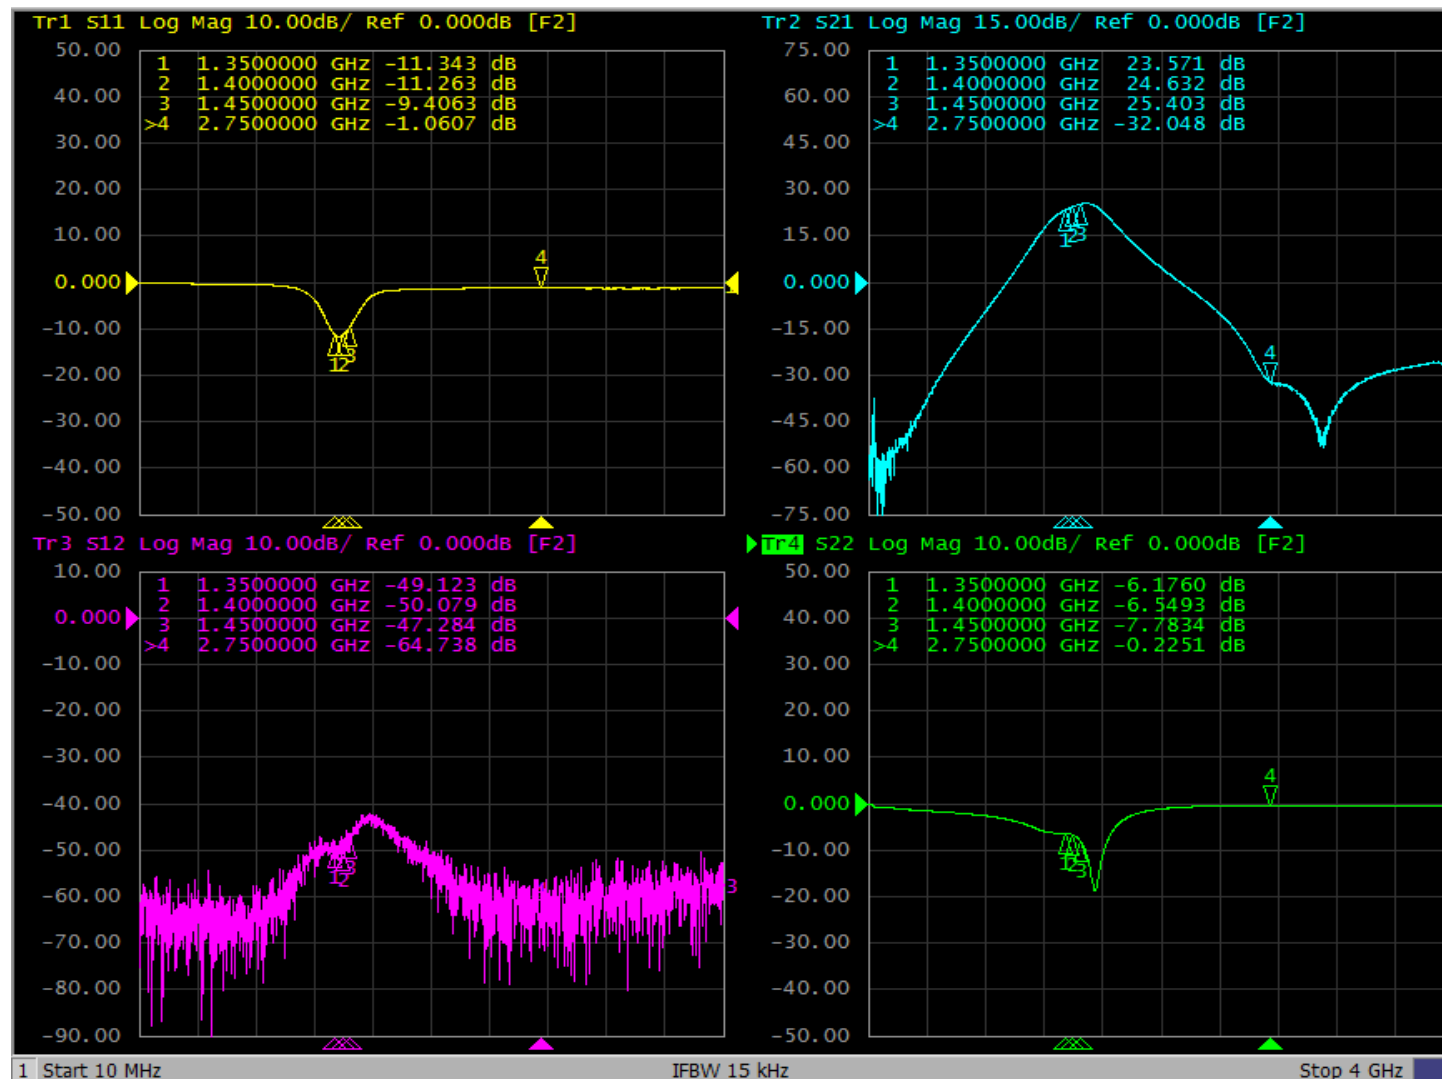GRF5613 Typical Operating Curves: S-Parameters (1350 to 1450 MHz Tune)


GRF5613 Typical Operating Curves: Stability Mu (10 MHz to 20 GHz)

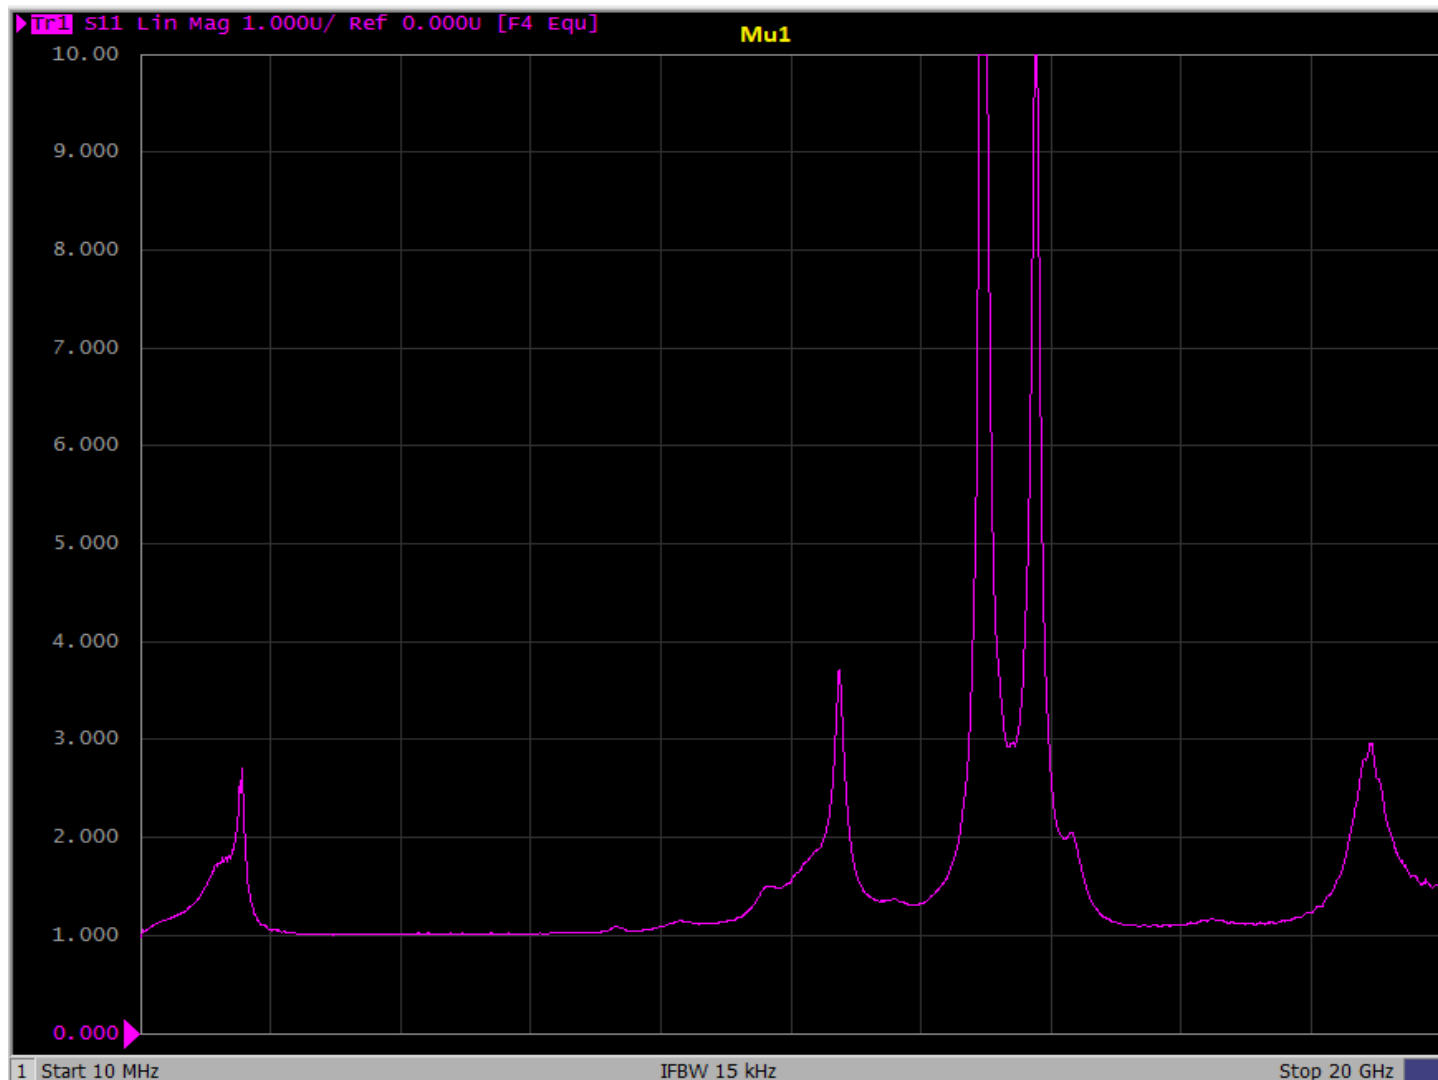



Note: Mu factor ≥ 1.0 implies unconditional stability.

GRF5613 Typical Operating Curves:


Junction Temperature per Application Schematic at 85 °C.

GRF5613 being a 2-stage device, sees one of the stages governing junction temperature over power sweep. Red line = 18 dBm shows where T_j is equivalent in both stages. At the left of red line, stage-1 governs T_j ($Q1 T_j$ is higher). To the right of red line, stage-2 governs T_j ($Q2 T_j$ is higher).

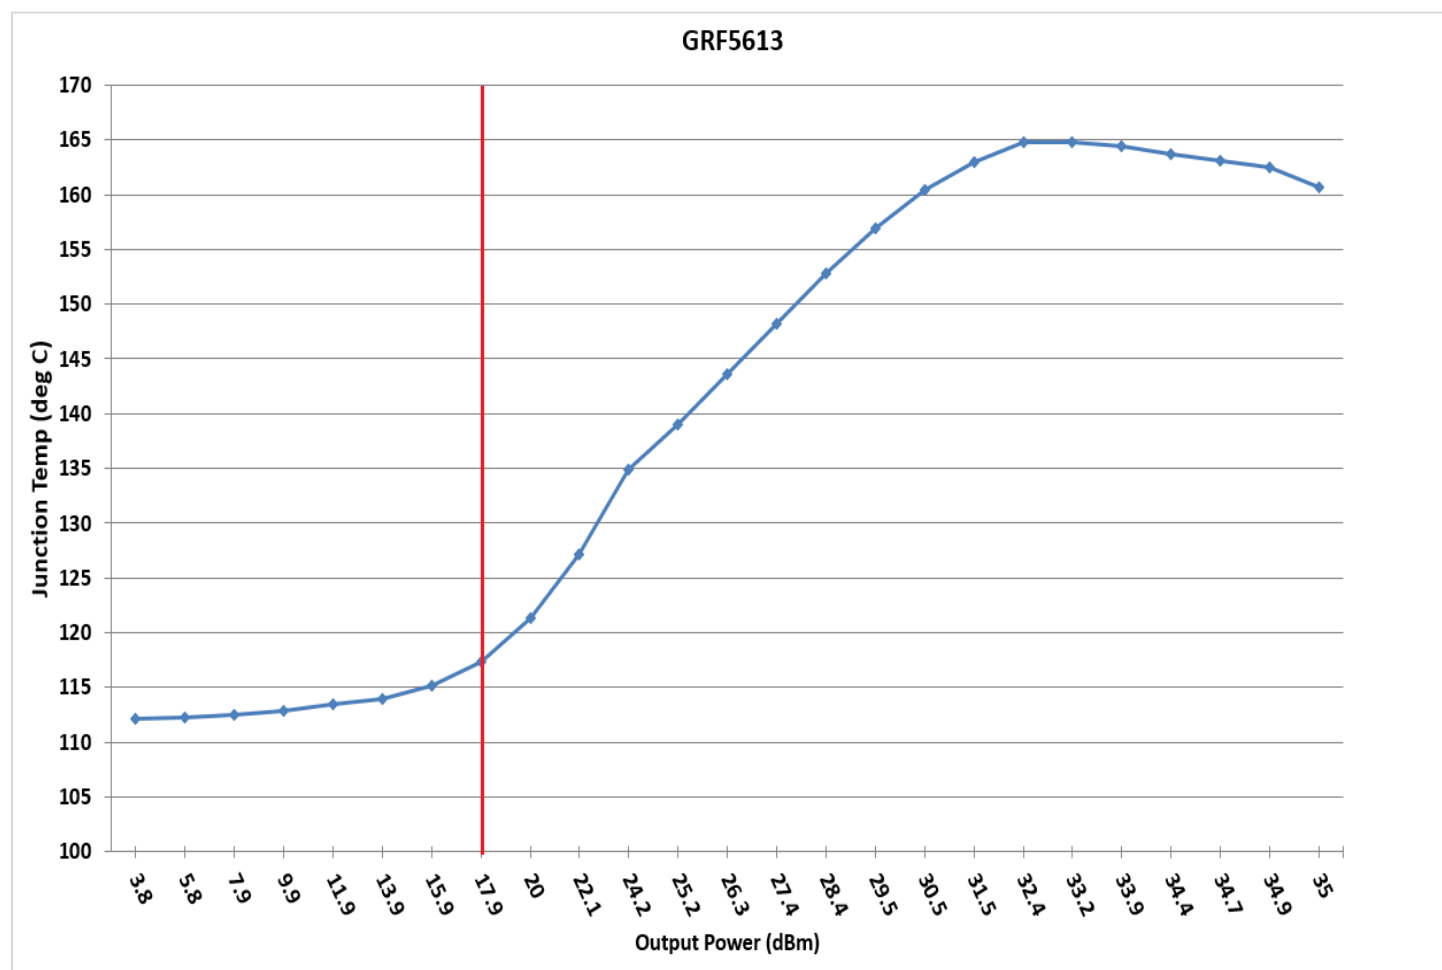

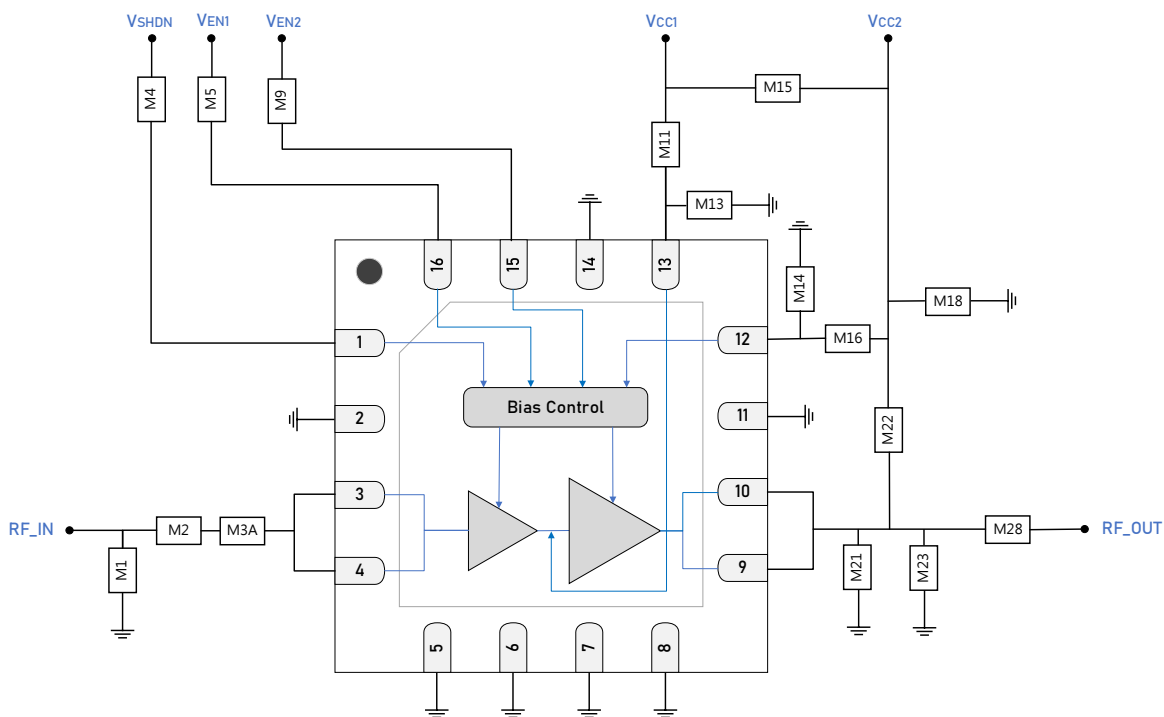

GRF5613 Standard Evaluation Board Schematic

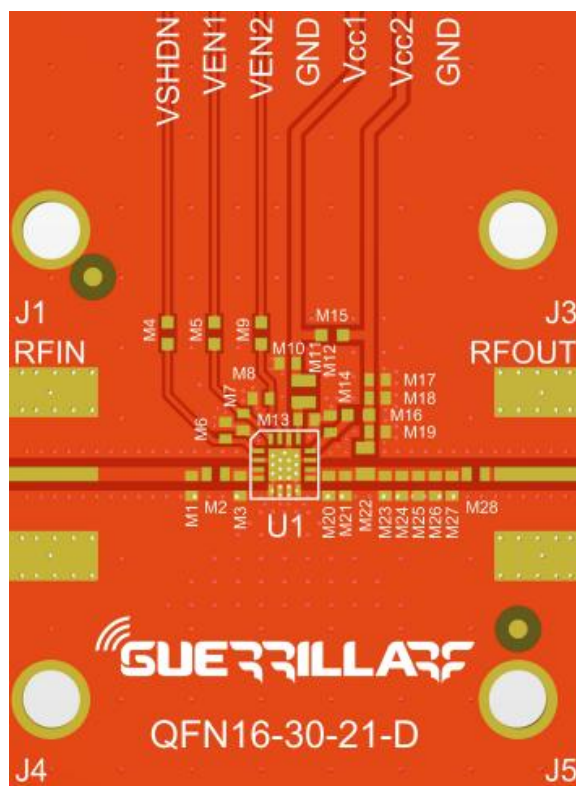

GRF5613 Evaluation Board Assembly Diagram

GRF5613 Evaluation Board Assembly Diagram Reference:


Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1	Inductor	Murata	LQG	2.4 nH	0402	ok
M2	Capacitor	Murata	GJM	4.3 pF	0402	ok
M3A	Resistor	Various	1%	2 Ω	0402	ok
M4	Resistor	Various	1%	0 Ω	0402	ok
M5	Resistor	Various	1%	15 k Ω	0402	ok
M9	Resistor	Various	1%	10.2 k Ω	0402	ok
M11	Inductor	Coilcraft	0402HP	22 nH	0402	ok
M13	Capacitor	Murata	GRM	0.1 μ F	0402	ok
M14	Capacitor	Murata	GRM	1.0 μ F	0402	ok
M15	Resistor (jumper)	Various	5%	0 Ω	0402	ok
M16	Resistor (jumper)	Various	1%	0 Ω	0402	ok
M18	Capacitor	Murata	GRM	** 10 μ F	0402	ok
M21	Capacitor	Murata	GJM	1.8 pF	0402	ok
M22	Inductor	Coilcraft	0908SQ	23 nH	0908	ok
M23	Capacitor	Murata	GJM	5.1 pF	0402	ok
M28	Capacitor	Murata	GJM	22 pF	0402	ok
Evaluation Board	QFN16-30-21-D					

Notes:


Standard evaluation board bias: $V_{CC} = 5$ V, $V_{EN1} = V_{EN2} = 5$ V, $V_{SHDN} = 0$ V.

** 10 μ F must be rated for > 5 V at maximum ambient temperature. Manufacturer Part Number in this case = GRM155C80J106ME11D.


Package Outline Drawing

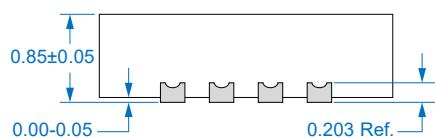

SIDE VIEW




TOP VIEW

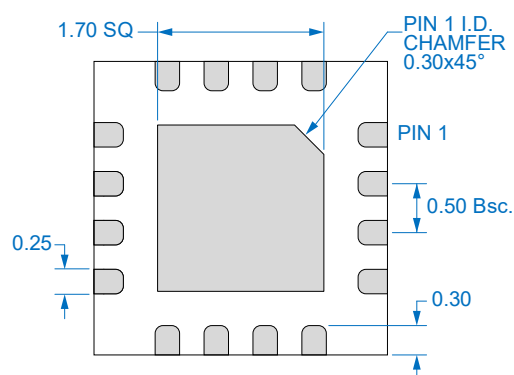

BOTTOM VIEW

Recommended PCB Footprint

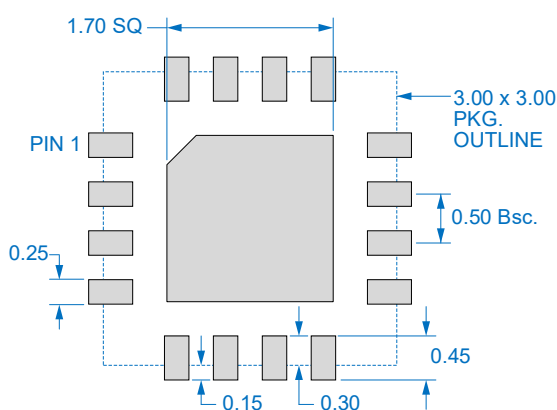

TOP VIEW

QFN-16 3 x 3 mm Package Dimensions and Suggested PCB Footprint (Top View)

Package Marking Diagram




- Line 1 "YY" = YEAR. "WW" = WORK WEEK the device was assembled.
- Line 2 "GRF" = Guerrilla RF.
- Line 3 "XXXX" = Device PART NUMBER.

Tape and Reel Information


Guerrilla RF's tape and reel specification complies with Electronic Industries Alliance (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). See the following page for the Tape and Reel Specification and Device Package Information table, which includes units per reel.

Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag and the outside surface of the box.

For the Tape and Reel Reference Table, please refer to: <https://www.guerrilla-rf.com/prodFiles/Manufacturing/MN001.pdf>

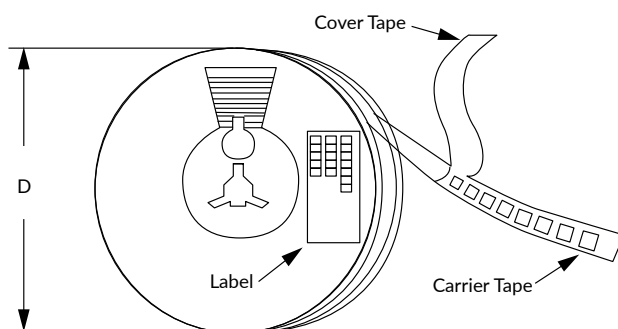

Tape and Reel Packaging with Reel Diameter Noted (D)

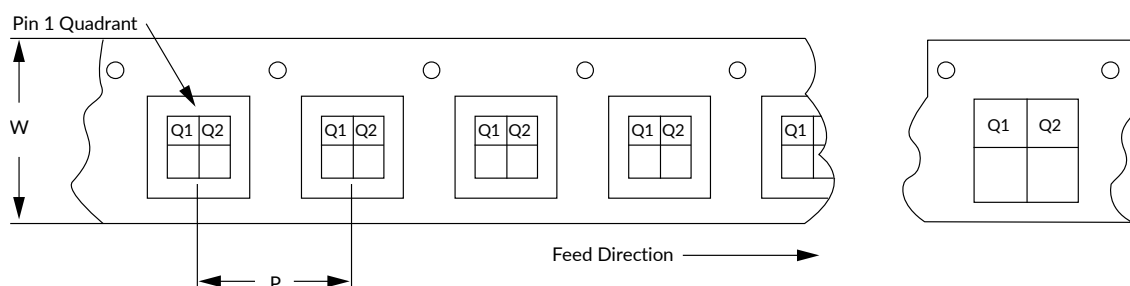

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information

Revision History

Revision Date	Description of Change
October 3, 2023	Preliminary Data Sheet.
December 5, 2024	Release Ø Data Sheet.
June 19, 2025	Extended upper frequency range from 1450 MHz to 1627 MHz.
February 25, 2026	Upgraded Data Sheet to new format. No change to device or device specifications.



Datasheet Classifications

Data Sheet Status	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on limited evaluation board measurements taken within the Guerrilla RF Applications Lab. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with <i>production-released</i> material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using <i>modelled estimates</i> that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material <i>derived from multiple lots which have been fabricated over an extended period of time</i> . MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this datasheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This datasheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this datasheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any datasheet, datasheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this datasheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, datasheets, and datasheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its datasheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATASHEETS AND DATASHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.