

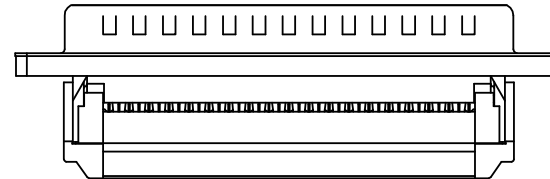
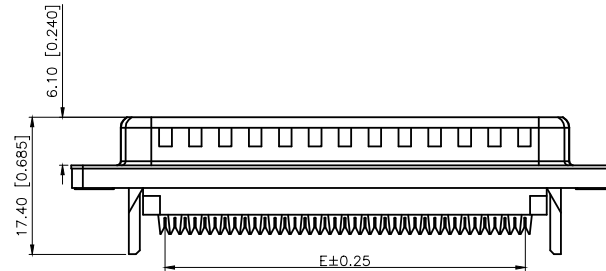


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		pin数表更新, 图片面升级整理图面	2024.08.06	阿 树

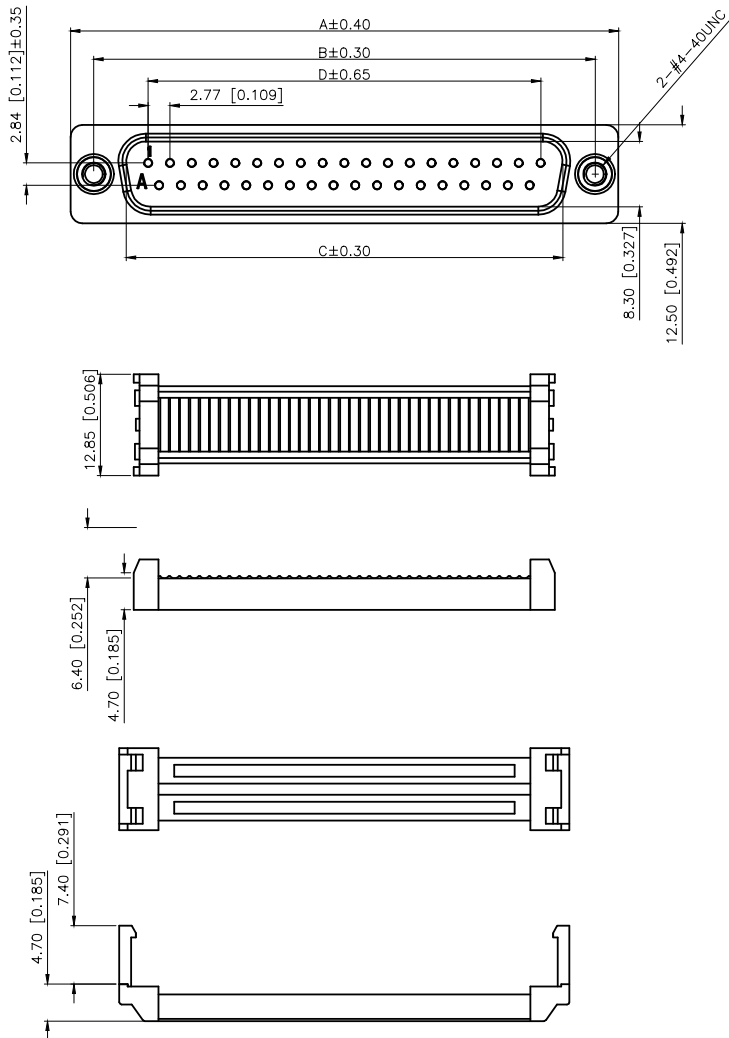

Specifications:

规格:

- 1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
- 2.Current rating:1A AC/DC
额定电流: 1A AC/DC
- 3.Withstanding voltage:500V AC/minute
耐受电压: $\geq 500V$ AC/分钟
- 4.Temperature range:-40℃-+105℃
温度范围: -40℃-+105℃
- 5.Insulation resistance:1000MΩMIN
绝缘电阻: $\geq 1000M\Omega$
- 6.Contact resistance:20mΩMax
接触电阻: $\geq 20m\Omega$
- 7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
- 8.The iron shell:SPCC Nivkel Plating/Tin Plating
铁壳: SPCC,镀镍/镀锡

B、成品不能有弯针, R角不一致等不良。

PART NO.:
X08 25 W I Z B 5
① ② ③ ④ ⑤ ⑥ ⑦

① Series NO.
② Row No.Pin No.XX-09;15;25;37
③ Welding Board Angle :W-Male
④ T: Tradutional C: Car-pin
⑤ Planting Category: 1:1U; 2:2U