

GENERAL DESCRIPTION

The TLV9061/2/4 families of products offer low voltage operation and rail-to-rail input and output , as well as excellent speed/power consumption ratio , providing an excellent bandwidth (11MHz) , a slew rate of 6.5V/us , and a quiescent current of 510uA/amplifier at 5V.The op-amps are unity gain stable and feat ure an ultra-low input bias current.

The TLV9061/2/4 are designed to provide optimal performance in low-voltage systems.They provide rail-to-rail I/O,and the maximum input offset voltage are 2.5mV for the devices.Their capacitive load capability is also good at low supply voltages. The operating range is from 2.2 V to 5.5 V.

The TLV9061/2/4 families of operational amplifiers are specified at the full temperature range of -40°C to +85°C undersingle or dual power supplies of 2.2V to 5.5V.


FEATURES

- Input Offset Voltage: 2.5mV (MAX)
- Supply Current: 300μA/ch
- Supply Range: 2.2V to 5.5V
- Gain Bandwidth: 11MHz
- Slew rate: 10V/μs
- Rail-to-Rail Input and Output
- Micro size Packages:
TLV9061IDBVR: SOT23-5
TLV9062IDR: SOP-8
TLV9064IDR: SOP-14

Applications


- Photodiode Amplification
- Active Filter and Buffer
- Battery Powered Electronics
- Sensors
- Cellular and Cordless Phones
- Test Equipment
- Driving A/D Converters

Reference News

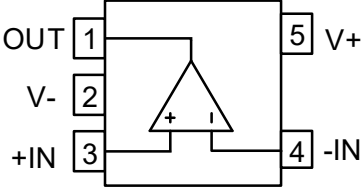P/N	PIN CONFIGURATION	MARKING
TLV9061IDBVR		


SOT-23-5

I/O		DESCRIPTION
NAME		
+IN	I	Positive (noninverting) input
-IN	I	Negative (inverting) input
NC	-	No Connection
V+	-	Positive (highest) power supply
V-	-	Negative (lowest) power supply

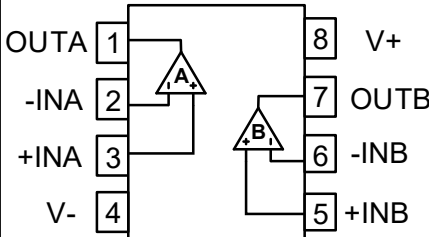P/N	PIN CONFIGURATION	MARKING
TLV9062IDR		

SOP-8

PIN		I/O	DESCRIPTION
NAME			
+INA	3	I	Noninverting input, channel A
+INB	5	I	Noninverting input, channel B
-INA	2	I	Inverting input, channel A
-INB	6	I	Inverting input, channel B
OUTA	1	O	Output, channel A
OUTB	7	O	Output, channel B
V-	4	-	Negative (lowest) power supply
V+	8	-	Positive (highest) power supply

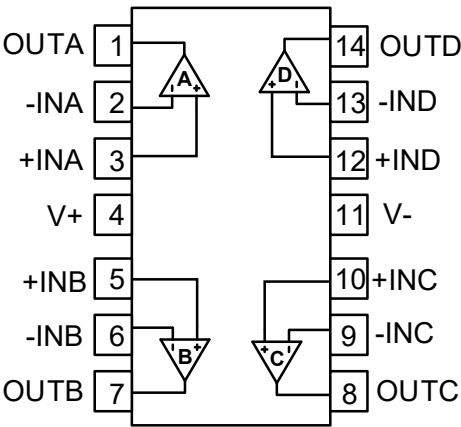P/N	PIN CONFIGURATION	MARKING
TLV9064IDR		

SOP-14

PIN		I/O	DESCRIPTION
NAME	Number		
+INA	3	I	Noninverting input, channel A
+INB	5	I	Noninverting input, channel B
+INC	10	I	Noninverting input, channel C
+IND	12	I	Noninverting input, channel D
-INA	2	I	Inverting input, channel A
-INB	6	I	Inverting input, channel B
-INC	9	I	Inverting input, channel C
-IND	13	I	Inverting input, channel D
OUTA	1	O	Output, channel A
OUTB	7	O	Output, channel B
OUTC	8	O	Output, channel C
OUTD	14	O	Output, channel D
V-	4	-	Negative (lowest) power supply
V+	11	-	Positive (highest) power supply

PACKAGE/ORDER INFORMATION

MODEL	Op Temp(°C)	ORDERING NUMBER	PACKAE DESCRIPTION	QTY
TLV9061/2/4	-40°C~85°C	TLV9061IDBVR	SOT23-5	3000
	-40°C~85°C	TLV9062IDR	SOP-8	2500
	-40°C~85°C	TLV9064IDR	SOP-14	2500

TYPICAL APPLICATION

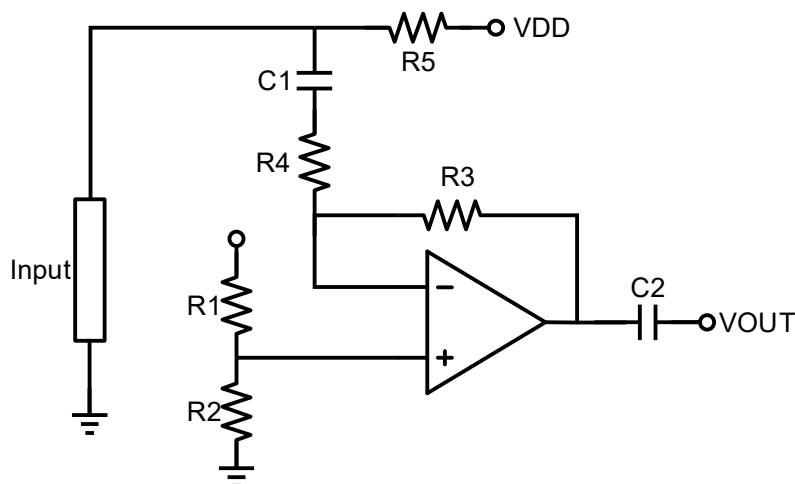


Figure 1. Typical Application

SPECIFICATIONS

Absolute Maximum Ratings⁽¹⁾

		MIN	MAX	UNIT
Voltage	Supply Voltage		6	V
	Signal Input Terminals Voltage ⁽²⁾	(V-) - 0.5	(V+) + 0.5	V
	Signal Input Terminals Voltage ⁽³⁾	(V-) - 0.5	(V+) + 0.5	V
Current	Signal Input Terminals Current ⁽²⁾	-10	10	mA
	Signal output Terminals Current ⁽³⁾	-200	200	mA
	Output Short-Circuit ⁽⁴⁾	Continuous		
θ_{JA}	Operating Temperature Range	-40	85	°C
	Storage Temperature Range	-65	150	°C
	Junction Temperature	-40	150	°C

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

(2) Input terminals are diode clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails should be current limited to 10mA or less.

(3) Output terminals are diode-clamped to the power-supply rails. Output signals that can swing more than 0.5V beyond the supply rails should be current-limited to ± 200 mA or less.

(4) Short-circuit to ground, one amplifier per package.

ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-Body Model (HBM)	± 2000	V
		Charged-Device Model (CDM)	± 500	V
		Machine Model	100	V

Recommended Operating Conditions

		MIN	MAX	UNIT
Supply voltage, $V_S =$ (V+) - (V-)	Single-supply	2.2	5.5	V
	Dual-supply	± 1.1	± 2.75	V

ELECTRICAL CHARACTERISTICS ($V_S = +5V$)

At $T_A = 25^\circ C$, $V_{IN}=V_{OUT}= V_S /2$, unless otherwise noted.

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
OFFSET VOLTAGE						
V_{OS}	Input Offset Voltage		-2.5	0.8	2.5	mV
dV_{OS}/dT	Input Offset Voltage Average Drift	$T_A = -40^\circ C$ to $85^\circ C$		0.6		$\mu V/^\circ C$
INPUT CURRENT						
I_B	Input Bias Current			400		pA
I_{OS}	Input Offset Current			30		pA
NOISE						
V_N	Input Voltage Noise	$f=0.1Hz$ to $10Hz$		15		μV_{PP}
e_n	Input Voltage Noise PSD	$f=1kHz$		60		$nV/\sqrt{Hz}$
INPUT VOLTAGE						
V_{CM}	Common-Mode Voltage Range		$V_{S-} -0.1$		$V_{S+}+0.1$	V
CMRR	Common-Mode Rejection Ratio	$V_{CM}=0.1V$ to $4V$	85	95		dB
FREQUENCY RESPONSE						
GBW	Gain-Bandwidth Product			11		MHz
SR	Slew Rate	$G = +1$, $V_{IN}=2V$ Step		10		V/ μs
t_s	Settling Time	$G = +1$, $V_{IN}=2V$ Step		0.6		μs
OUTPUT						
A_v	Open-Loop Voltage Gain	$V_{OUT}=0.5V$ to $4.8V$	95	105		dB
V_{OH}	High output voltage swing	$R_L=10k\Omega$			5	mV
V_{OL}	Low output voltage swing	$R_L=10k\Omega$			5	mV
I_{SC}	Output Short-Circuit Current	Source Current		20		mA
		Sink Current		70		mA
$C_L^{(1)}$	Capacitive Load Drive	$G = +1$, $V_{IN}=0.2V$ Step			200	pF

POWER SUPPLY

PSRR	Power-Supply Rejection Ratio	$V_s=2.5V$ to $5.5V$	90	100		dB
V_s	Operating Voltage Range	$I_b=0A$	2.2		5.5	V
I_b	Quiescent Current/Amplifier	$I_b=0A$		300		μA

(1) Capacitive load drive means that above a given maximum value, the output waveform will oscillate under the step response.

TYPICAL CHARACTERISTICS

At $T_A = 25^\circ\text{C}$, $V_S = \pm 2.5\text{V}$, $G = +1$, $V_{IN} = V_{OUT} = V_S / 2$, unless otherwise noted.

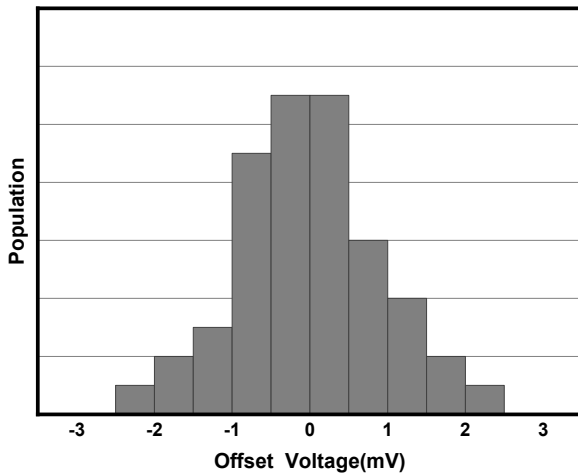


Figure 2. Offset Voltage Production Distribution

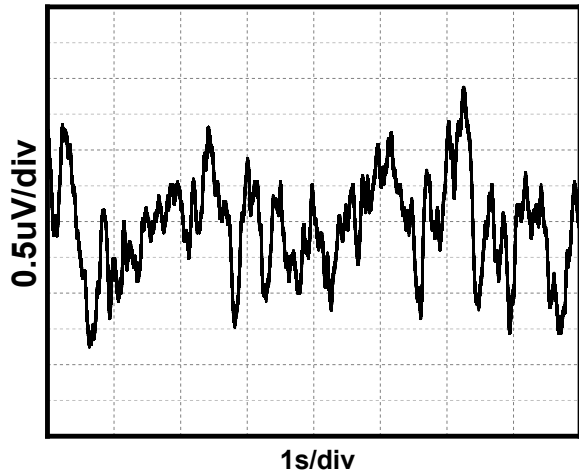


Figure 3. 0.1Hz to 10Hz Noise

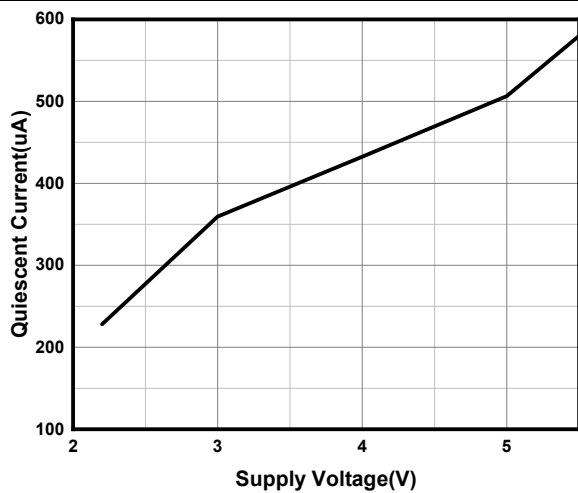


Figure 4. Quiescent Current vs Supply Voltage

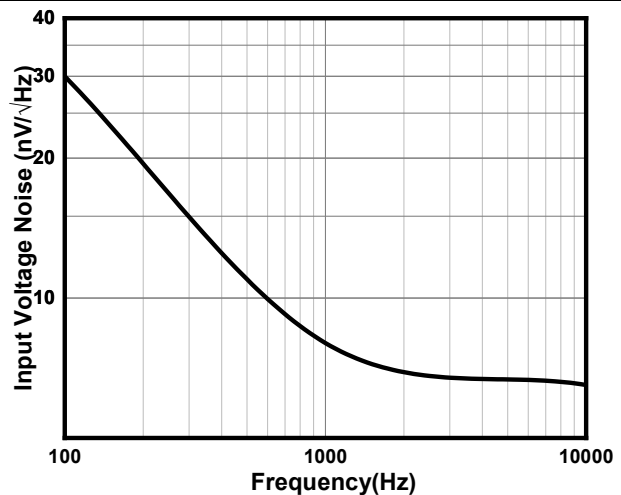


Figure 5. Input Voltage Noise Spectral Density

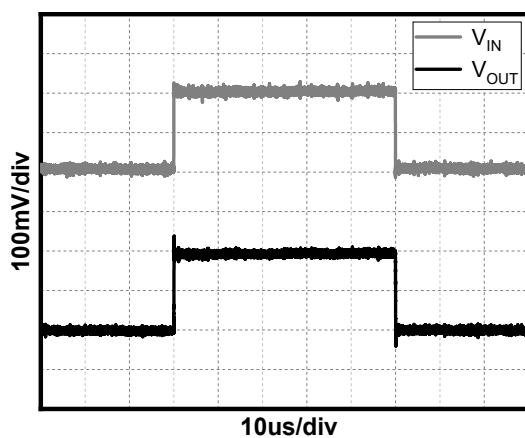


Figure 6. Small-Signal Step Response

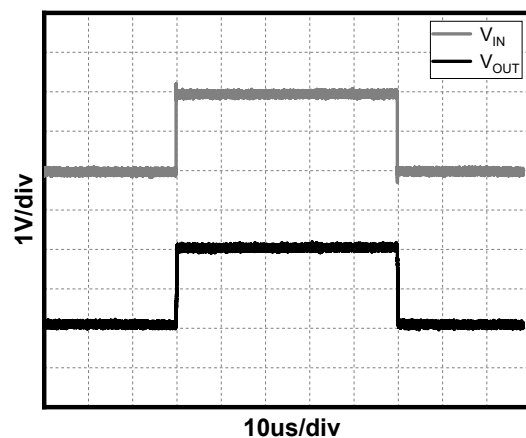


Figure 7. Large-Signal Step Response

Detailed Description

Overview

The TLV9061/2/4 devices are a high-bandwidth, unity-gain stable, rail-to-rail operational amplifier available in single and dual-channel versions that operate in a single-supply voltage range of 2.2V to 5.5V ($\pm 1.1\text{V}$ to $\pm 2.75\text{V}$). A high supply voltage of 6V (absolute maximum) can permanently damage the amplifier. Rail-to-rail input and output wobbles significantly increase the dynamic range, especially in low-supply applications. Good layout practices require that a 0.1 μF capacitor be used where it is tightly threaded through the power supply pin.

Phase Reversal Protection

The TLV9061/2/4 devices have internal phase-reversal protection. Many op amps exhibit phase reversal when the input is driven beyond the linear common-mode range. This condition is most often encountered in noninverting circuits when the input is driven beyond the specified common-mode voltage range, causing the output to reverse into the opposite rail. The input of the TLV9061/2/4 prevents phase reversal with excessive commonmode voltage. Instead, the appropriate rail limits the output voltage.

Typical Applications

1 Voltage Follower

As shown in Figure 8, the voltage gain is 1. With this circuit, the output voltage V_{OUT} is configured to be equal to the input voltage V_{IN} . Due to the high input impedance and low output impedance, the circuit can also stabilize the output voltage, the output voltage expression is

$$V_{\text{OUT}} = V_{\text{IN}} \quad (1)$$

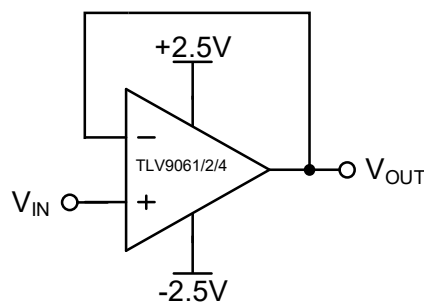


Figure 8. Voltage Follower

2 Inverting Proportional Amplifier

As shown in Figure 9, for a reverse-phase proportional amplifier, the input voltage V_{IN} is amplified by a voltage gain that depends on the ratio of R_1 to R_2 . The output voltage V_{OUT} is inversely with the input voltage V_{IN} . The input impedance of the circuit is equal to R_1 , and the output voltage expression is

$$V_{\text{OUT}} = -\frac{R_2}{R_1} V_{\text{IN}} \quad (2)$$

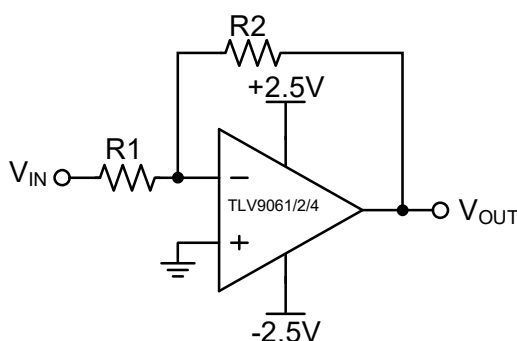


Figure 9. Inverting Proportional Amplifier

3 Noninverting Proportional Amplifier

As shown in Figure 10, for a noninverting amplifier, the input voltage V_{IN} is amplified by a voltage gain that depends on the ratio of $R1$ to $R2$. The output voltage V_{OUT} is in phase with the input voltage V_{IN} . In fact, this circuit has a high input impedance because its input side is the same as the input side of the operational amplifier. The output voltage expression is

$$V_{OUT} = \left(1 + \frac{R2}{R1}\right) V_{IN} \quad (3)$$

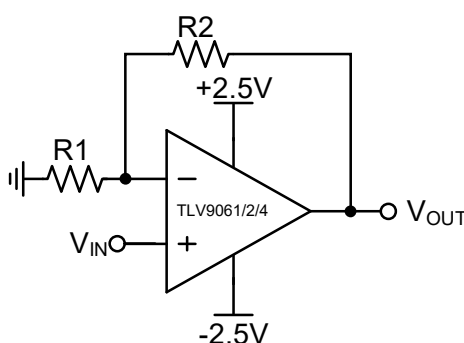


Figure 10. Noninverting Proportional Amplifier


Layout Guidelines

Attention to good layout practices is always recommended. Keep traces short. When possible, use a PCB ground plane with surface-mount components placed as close to the device pins as possible. Place a 0.1uF capacitor closely across the supply pins.

These guidelines should be applied throughout the analog circuit to improve performance and provide benefits such as reducing the EMI susceptibility.

PACKAGE DESCRIPTION


SOT23-5

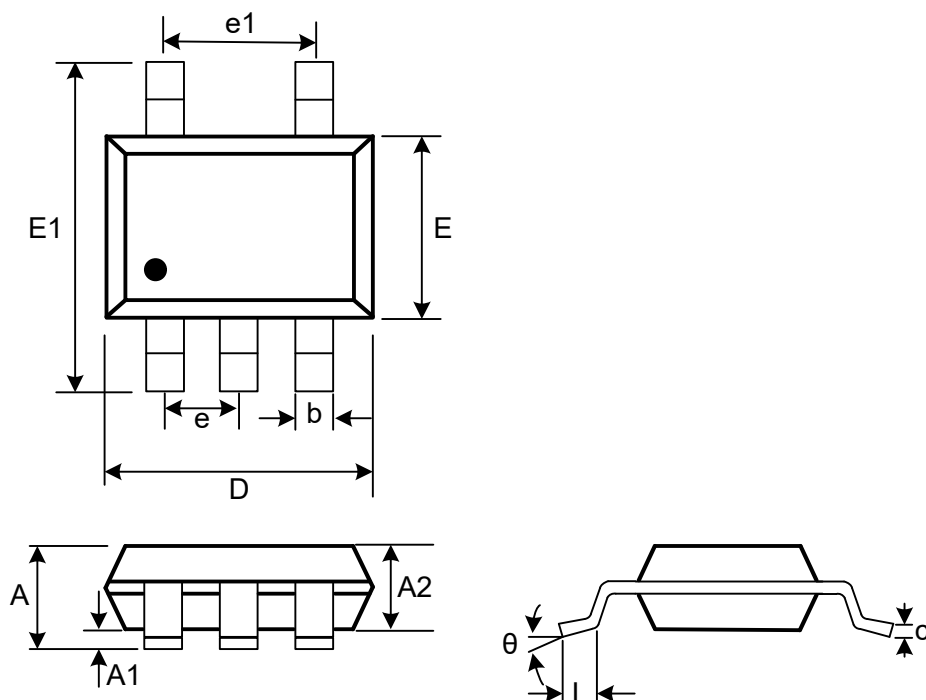

(Unit: mm)

Symbol	Min	Max
A	1.05	1.25
A1	0	0.1
A2	1.05	1.15
b	0.3	0.5
c	0.1	0.2
D	2.82	3.02
e	0.95(BSC)	
e1	1.9(BSC)	
E	1.5	1.7
E1	2.65	2.95
L	0.3	0.6
θ	0°	8°


SOP-8

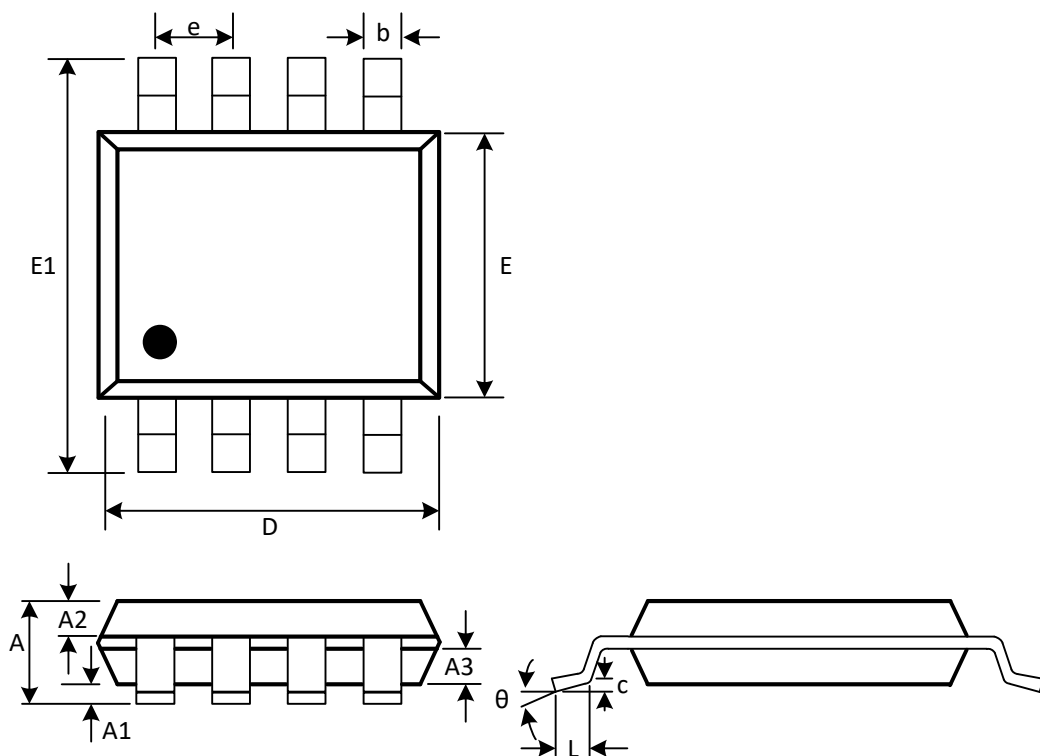

(Unit: mm)

Symbol	Min	Max
A	1.300	1.600
A1	0.050	0.200
A2	0.550	0.650
A3	0.550	0.650
b	0.356	0.456
c	0.203	0.233
D	4.800	5.000
e	1.270(BSC)	
E	3.800	4.000
E1	5.800	6.200
L	0.400	0.800
θ	0°	8°

SOP-14

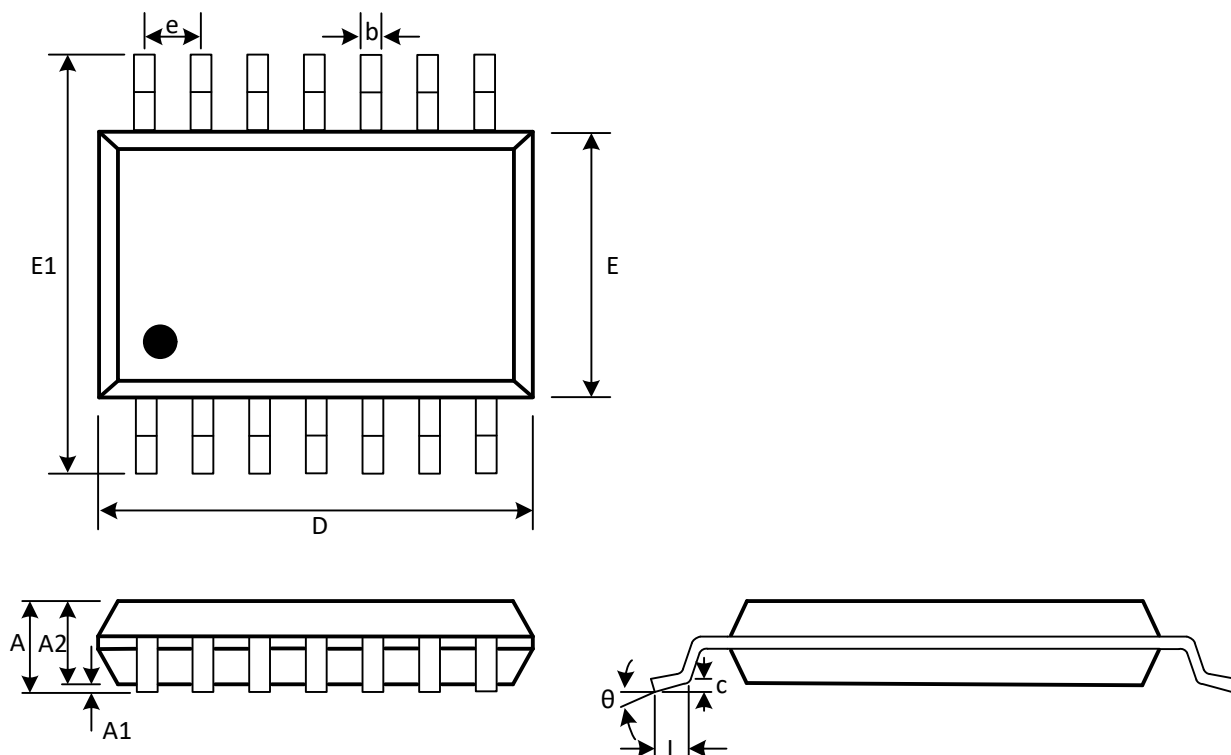

(Unit: mm)

Symbol	Min	Max
A	1.350	1.750
A1	0.100	0.250
A2	1.350	1.550
b	0.310	0.510
c	0.100	0.250
D	8.450	8.850
e	1.270(BSC)	
E1	5.800	6.200
E	3.800	4.000
L	0.400	1.270
θ	0°	8°