
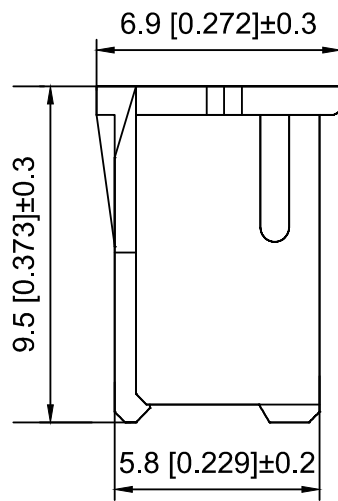
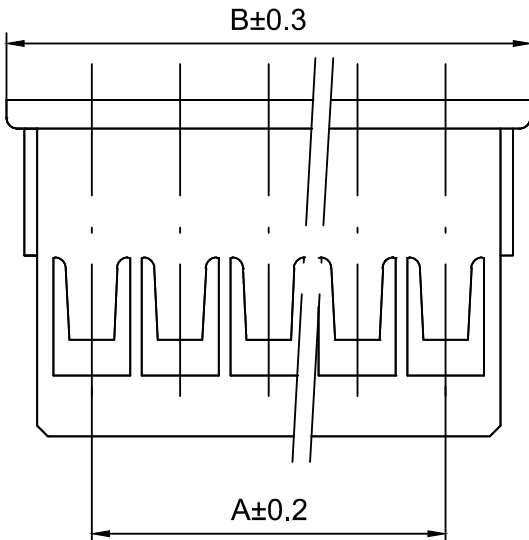
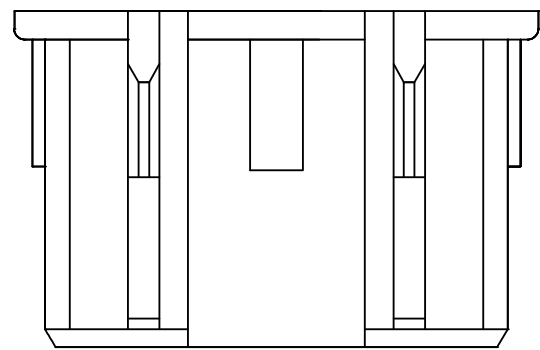


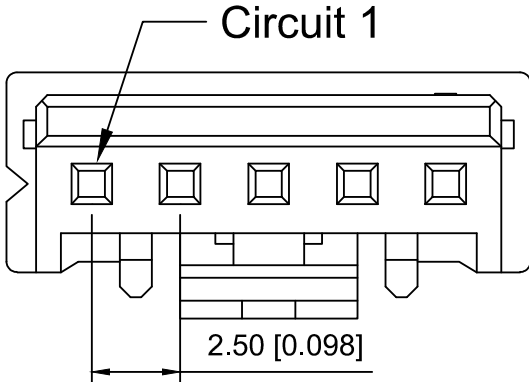

Specifications:  
规格:  
Voltage rating:250V AC/DC  
额定电压: 250V AC/DC  
Current rating:3A AC/DC  
额定电流: 3A AC/DC  
Withstanding voltage:1000V AC/minute  
耐受电压: 1000V AC/分钟  
Temperature range:-25℃-+85℃  
温度范围: -25℃-+85℃  
Insulation resistance:1000MΩ min  
绝缘电阻: 1000MΩ Min  
Contact resistance:20mΩ Max  
接触电阻: 20mΩ Max

X2508 H - 02 - N0  
① ② ③ ④

- 1.Series No
- 2.Category:H-HSG
- 3.Row No.Pin No:XX-02~20P
- 4.Material:N0-Nylon 94V-0 White

| Poles | Dimensions(mm) |       |
|-------|----------------|-------|
|       | A              | B     |
| 02    | 2.50           | 7.30  |
| 03    | 5.00           | 9.80  |
| 04    | 7.50           | 12.30 |
| 05    | 10.00          | 14.80 |
| 06    | 12.50          | 17.30 |
| 07    | 15.00          | 19.80 |
| 08    | 17.50          | 22.30 |
| 09    | 20.00          | 24.80 |
| 10    | 22.50          | 27.30 |
| 11    | 25.00          | 29.80 |
| 12    | 27.50          | 32.30 |
| 20    | 47.50          | 52.30 |

|              |          |                    |                       |
|--------------|----------|--------------------|-----------------------|
| X2508H-02-N0 | Nylon    | X2508W             | X2508T                |
| PART NO      | Material | Suitable XKB Wafer | Suitable XKB Terminal |

|                                                   |             |      |         |          |                        |      |
|---------------------------------------------------|-------------|------|---------|----------|------------------------|------|
|                                                   |             |      |         |          | ANGLAR                 | ±5°  |
| ΔX                                                |             |      |         |          | L≤ 4                   | ±0.2 |
| ΔX                                                |             |      |         |          | 4<L≤ 16                | ±0.3 |
| ΔX                                                |             |      |         |          | 16<L≤ 63               | ±0.4 |
| MARK                                              | DESCRIPTION | DATE | REVISED | APPROVED | L> 63                  | ±0.5 |
| REVISIONS                                         |             |      |         |          | UNSPECIFIED TOLERANCES |      |
| www.helloxkb.com   www.helloxkb.cn   www.xk-dg.cn |             |      |         |          |                        |      |



|                                      |  |             |                                            |              |                |
|--------------------------------------|--|-------------|--------------------------------------------|--------------|----------------|
| DSND                                 |  | SCALE: N/A  | MODEL TYPE:<br>2.5mm Crimp Style Connector |              |                |
| DWN                                  |  | VIEW:       | PART NO.:<br>X2508H-02-N0                  |              |                |
| CHKD                                 |  | UNIT: mm/in | DWG NO.:<br>X-X2508H-02-N0                 |              |                |
| APPD                                 |  | SIZE: A4    |                                            |              |                |
| XKB INDUSTRIAL PRECISION CO.,LIMITED |  |             | WEIGHT                                     | SHEET<br>1/1 | REVISION<br>A0 |