

Non-Crack-Noise, Ultra-Low-THD+N, Ultra-Low-EMI, Second Generation Class-D Audio Amplifier

FEATURES

- Ultra low THD+N:0.008%
- AB/D operate mode
- Two NCN level: 0.65w and 0.8w
- Unique RNS
- High SNR: 91dB
- EEE Function, Greatly reduces EMI over the full bandwidth
- Excellent Pop-Click Suppression
- No VREF capacitor
- One-pulse control
- Filter-Free Class-D Architecture
- High PSRR (72dB at 217Hz)
- Low Shutdown Current (<0.1 μ A)
- Power Supply Range: 2.5V~5.5V
- Over-Current Protection
- Over-Temperature Protection
- Small QFN 1.5mmX1.5mmX0.55mm-9L Package

APPLICATIONS

- Cellular Phones、MP3/PMP、GPS、Digital Photo Frame、HAC

DESCRIPTION

The AW8155B is a non-crack-noise (NCN), ultra-low-EMI, filter-free, AB/D output mode selection, unique RNS technology, second generation Class-D audio amplifier. Ultra low THD+N, Unique NCN function, which adjusts the system gain automatically while detecting the "Crack" distortion of output signal, protects the speaker from damage at high power levels and invites the user to bask in immense musical enjoyment.

AW8155B NCN output power can be set to 0.65w or 0.8w for different speakers, this feature is embedded in order to protect speakers from damage caused by an excessive sound level.

The AW8155B features a unique RNS technology, which effectively reduces RF energy, attenuate the RF TDD-noise, an acceptable audible level to the customer.

The AW8155B features the EEE (Enhanced Emission Elimination) function which greatly reduces EMI over the full bandwidth.

The filter-free PWM architecture and internal gain setting reduces external components count, board area consumption, system cost and simplifies the design. The over-current, over-temperature is prepared inside of the device.

The AW8155B is available in an ultra small QFN 1.5mmX1.5mmX0.55mm-9L package. The AW8155B is specified over the industrial temperature range of -40 $^{\circ}$ C to +85 $^{\circ}$ C.

TYPICAL APPLICATION CIRCUIT

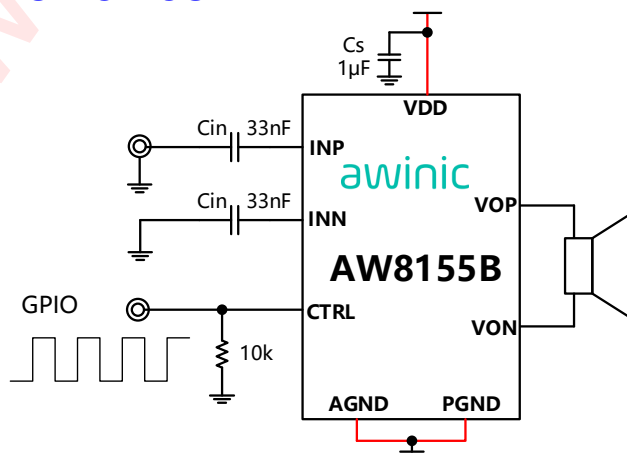


Figure 1 AW8155BQNR Typical Application Diagram

Note: Traces carry high current are marked in red in the above figure

PIN CONFIGURATION AND TOP MARK

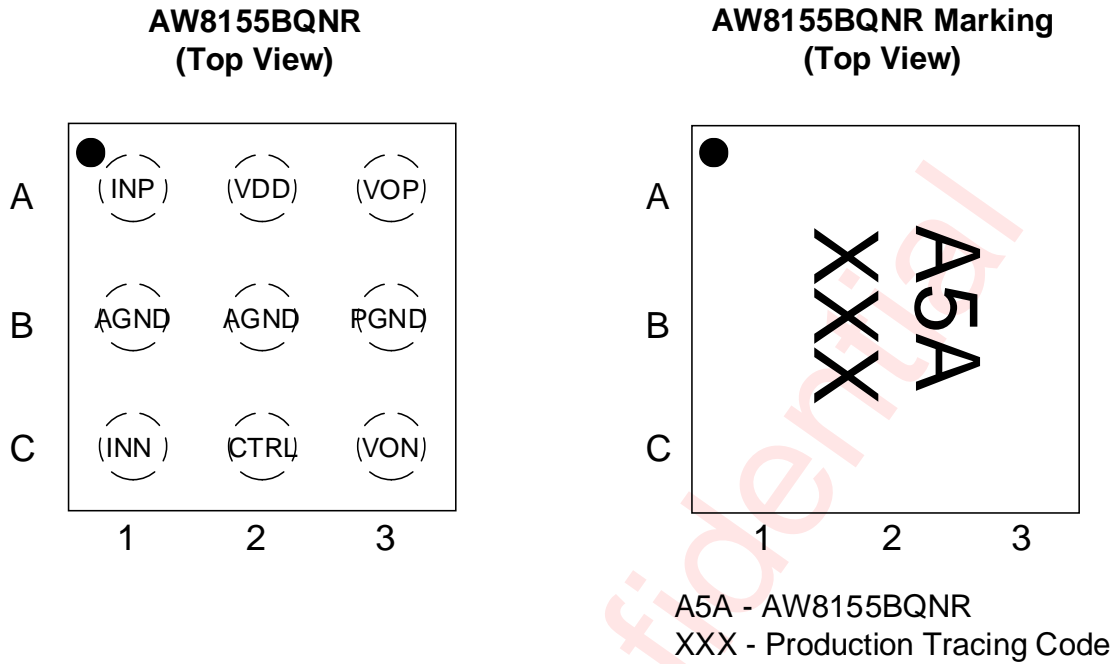


Figure 2 AW8155BQNR Pin configuration and Top Mark

PIN DEFINITION

No.	NAME	DESCRIPTION
A1	INP	Positive audio input
A2	VDD	Power Supply
A3	VOP	Positive audio output
B1	AGND	Analog ground
B2	AGND	Analog ground
B3	PGND	Power ground
C1	INN	Negative audio input
C2	CTRL	Shutdown and NCN control pin
C3	VON	Negative audio output

FUNCTIONAL DIAGRAM

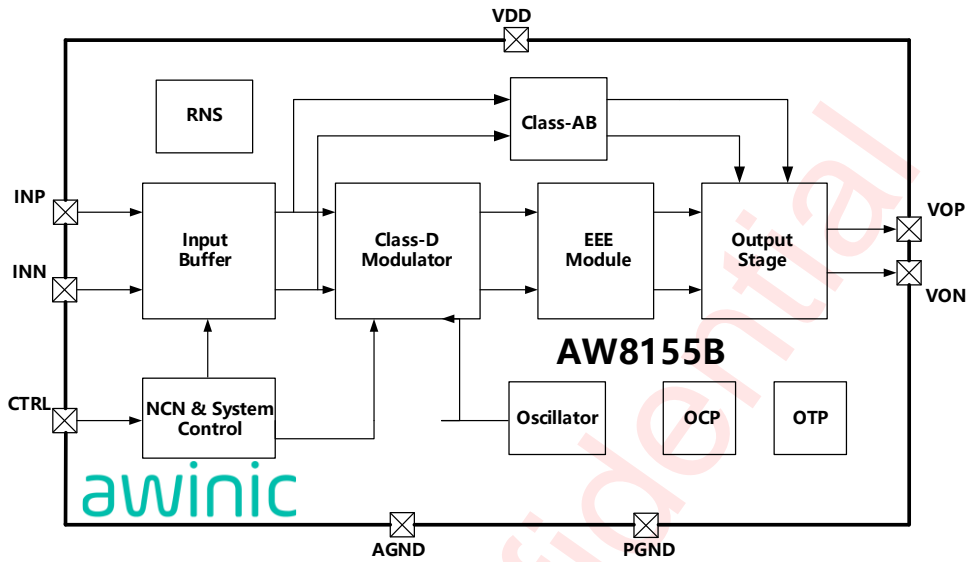


Figure 3 AW8155BQNR Functional Diagram

Typical Application Circuits

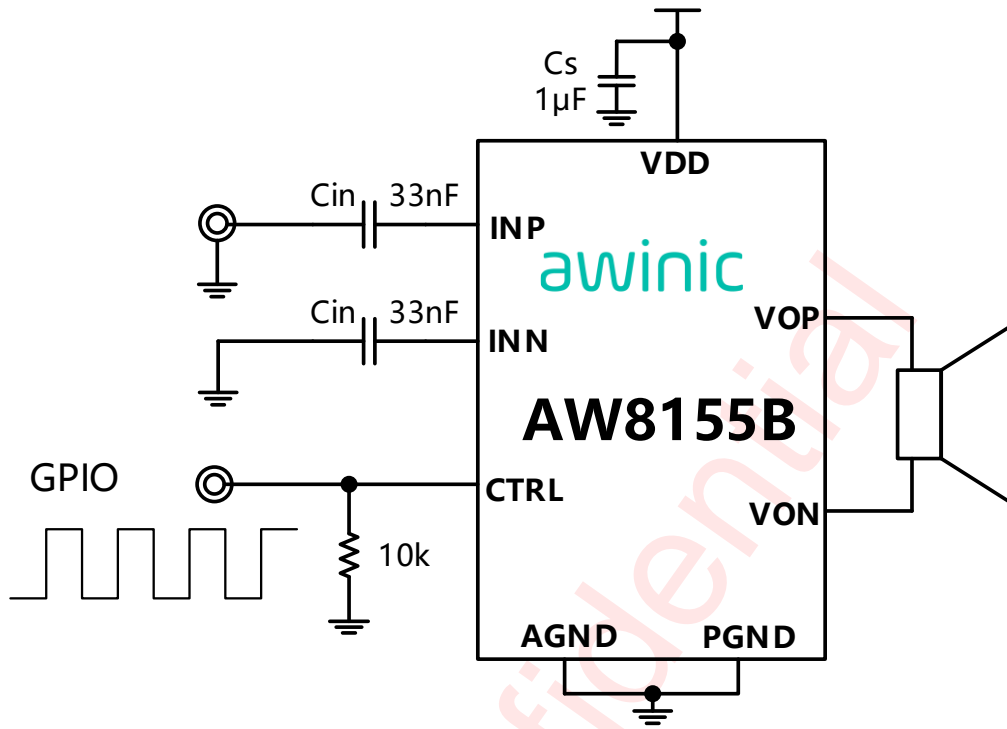


Figure 4 AW8155B Application Schematic With Single-Ended Input

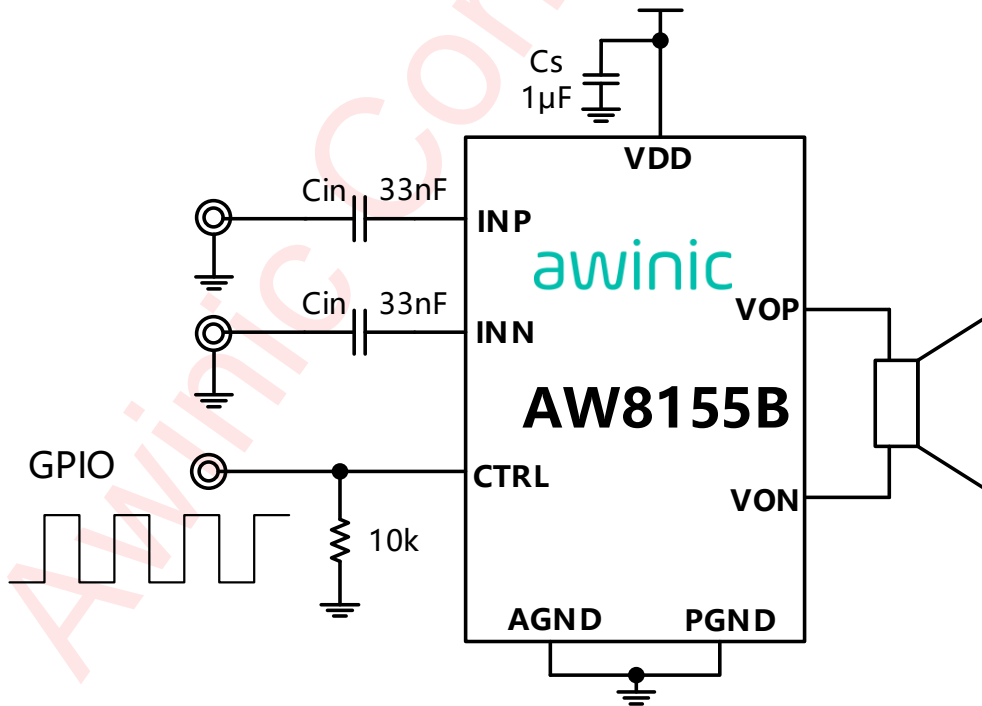


Figure 5 AW8155B Application Schematic With Differential Input

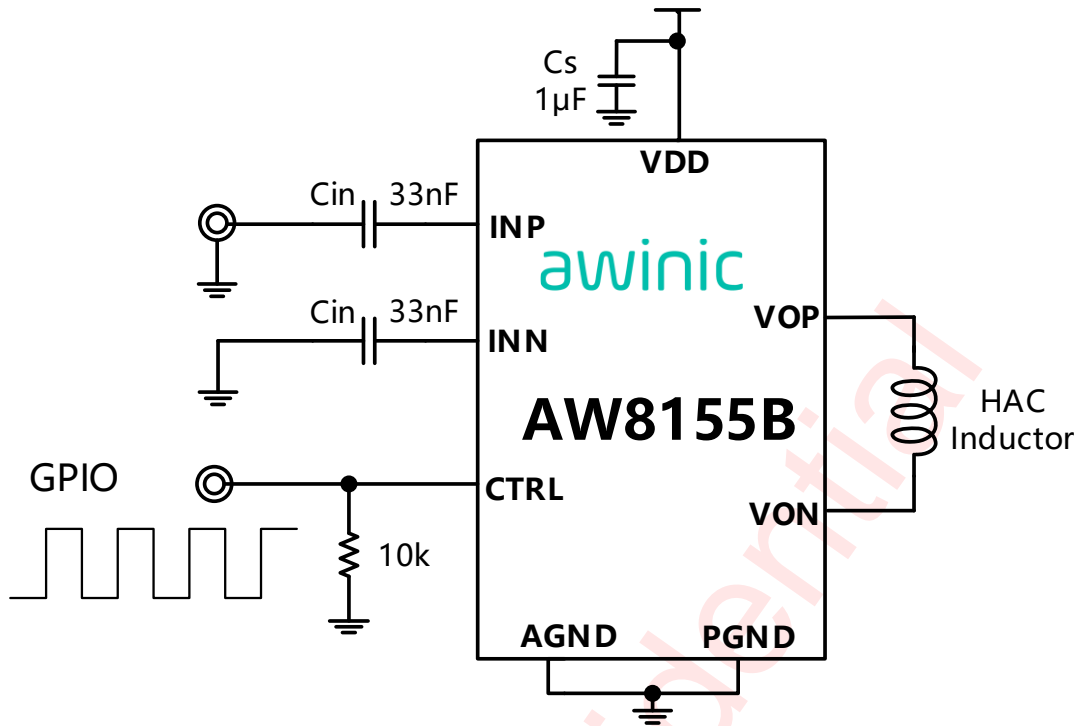


Figure 6 AW8155B HAC Application Schematic With Differential Input

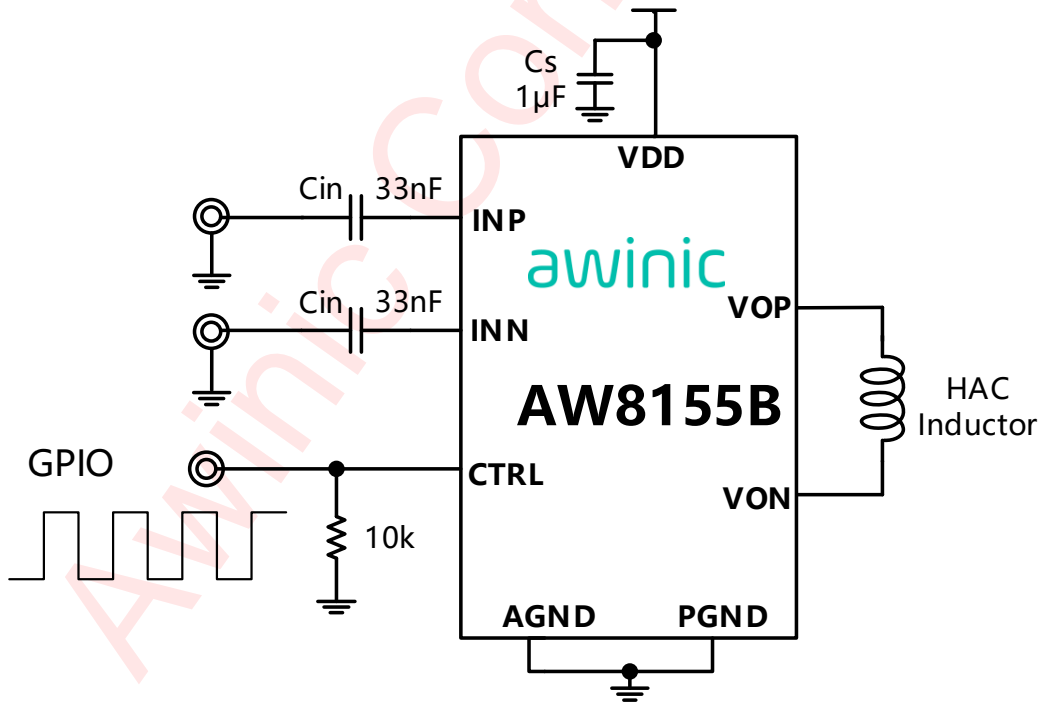


Figure 7 AW8155B HAC Application Schematic With Differential Input

ORDERING INFORMATION

Part Number	Temperature	Package	Marking	Moisture Sensitivity Level	Environmental Information	Delivery Form
AW8155BQNR	-40°C~85°C	QFN 1.5mmX1.5m m-9L	A5A	MSL3	RoHS+HF	3000 units/Tape and Reel

ABSOLUTE MAXIMUM RATINGS^(NOTE 2)





Parameter	Range
Supply voltage VDD	-0.3V to 6V
Input Voltage	-0.3V to VDD+0.3V
Package Thermal Resistance θ_{JA}	116.41°C/W
Operating free-air temperature	-40°C to 85°C
Maximum Junction Temperature T _{JMAX}	76.15°C
Storage Temperature Range T _{STG}	-65°C to 150°C
Lead Temperature (Soldering 10 Seconds)	260°C
ESD Rating ^(Note 3)	
HBM (human body model)	±4kV
CDM (charged-device model)	±2kV
Latch-up	
Test Condition: JESD78F.	+IT: 450mA -IT: -450mA

NOTE2: Conditions out of those ranges listed in "absolute maximum ratings" may cause permanent damages to the device. In spite of the limits above, functional operation conditions of the device should within the ranges listed in "recommended operating conditions". Exposure to absolute-maximum-rated conditions for prolonged periods may affect device reliability.

NOTE3: The human body model is a 100pF capacitor discharged through a 1.5kΩ resistor into each pin. Test method: ESDA/JEDEC JS-001-2023.

Test method of the charge device model: ESDA/JEDEC JS-002-2022.

OPERATE MODE DESCRIPTION(T_A=25°C, VDD=4.2V, RL=8Ω+33uH)

mode	CTRL	operating	AV (V/V)	NCN power (W)	RNS
mode 1		Class_D	8	0.65	√
mode 2		Class_D	12	0.8	√
mode 3 ^(Note)		Test			
mode 4		Class_AB	12	/	

Note: mode 3 is internal test mode







Electrical Characteristics







Test condition: $T_A=25^{\circ}\text{C}$, $V_{DD}=3.6\text{V}$, $C_{in}=33\text{nF}$, $R_L=8\Omega+33\mu\text{H}$, $f=1\text{kHz}$ (unless otherwise noted)






Parameter		Test conditions	Min	Typ	Max	Units
Electrical Characteristics						
V_{DD}	Power supply voltage		2.5		5.5	V
V_{IH}	CTRL high input voltage		1.3		V_{DD}	V
V_{IL}	CTRL low input voltage		0		0.35	V
V_{OS}	Output offset voltage	Input AC grounded, $V_{DD}=2.5\text{V to }5.5\text{V}$	-30	0	30	mV
I_{SD}	Shutdown current	$V_{DD}=3.6\text{V}$, CTRL =0V		0.1	1	μA
f_{SW}	Modulation Frequency	$V_{DD}=2.5\text{V to }5.5\text{V}$	600	800	1000	kHz
T_{SD}	Thermal Protect level			160		$^{\circ}\text{C}$
T_{SDR}	Thermal Hysteresis			120		$^{\circ}\text{C}$
T_{ON}	Start-up time			40		ms
Rini	Internal impedance			28.5		k Ω
Operating Characteristics						
P_O	Output power	THD+N=10%, $R_L=4\Omega+33\mu\text{H}$, $V_{DD}=5\text{V}$		2.61		W
		THD+N=1%, $R_L=4\Omega+33\mu\text{H}$, $V_{DD}=5\text{V}$		2		W
		THD+N=10%, $R_L=8\Omega+33\mu\text{H}$, $V_{DD}=5\text{V}$		1.53		W
		THD+N=1%, $R_L=8\Omega+33\mu\text{H}$, $V_{DD}=5\text{V}$		1.25		W
		THD+N=10%, $R_L=4\Omega+33\mu\text{H}$, $V_{DD}=4.2\text{V}$		1.81		W
		THD+N=1%, $R_L=4\Omega+33\mu\text{H}$, $V_{DD}=4.2\text{V}$		1.42		W
		THD+N=10%, $R_L=8\Omega+33\mu\text{H}$, $V_{DD}=4.2\text{V}$		1.13		W
		THD+N=1%, $R_L=8\Omega+33\mu\text{H}$, $V_{DD}=4.2\text{V}$		0.92		W
		THD+N=10%, $R_L=4\Omega+33\mu\text{H}$, $V_{DD}=3.6\text{V}$		1.34		W
		THD+N=1%, $R_L=4\Omega+33\mu\text{H}$, $V_{DD}=3.6\text{V}$		1.04		W
		THD+N=10%, $R_L=8\Omega+33\mu\text{H}$, $V_{DD}=3.6\text{V}$		0.84		W
		THD+N=1%, $R_L=8\Omega+33\mu\text{H}$, $V_{DD}=3.6\text{V}$		0.68		W
Mode 1						
I_q	Quiescent current	$V_{DD}=3.6\text{V}$, Input AC grounded, no load		3.0		mA
η	Efficiency	$V_{DD}=3.6\text{V}$, $P_O=0.8\text{W}$, $R_L=8\Omega+33\mu\text{H}$		90		%
A_v	Voltage gain			8		V/V
PSRR	Power suppression ration	$V_{DD}=4.2\text{V}$, $V_{p-p_sin}=200\text{mV}$	217Hz		72	dB
			1kHz		70	dB
THD+N	Total harmonic distortion plus noise	$V_{DD}=4.2\text{V}$, $P_O=0.5\text{W}$, $R_L=8\Omega+33\mu\text{H}$		0.008		%
		$V_{DD}=3.6\text{V}$, $P_O=0.25\text{W}$, $R_L=8\Omega+33\mu\text{H}$		0.01		%
P_O NCN	NCN output power	$f=1\text{kHz}$, $R_L=8\Omega+33\mu\text{H}$, $V_{DD}=4.2\text{V}$		0.65		W
T_{AT}	Attack time(-11dB)	$V_{DD}=4.2\text{V}$		45		ms
T_{RL}	Release time(11dB)	$V_{DD}=4.2\text{V}$		1		s
A_{MAX}	Max attenuation	$V_{DD}=4.2\text{V}$		-11		dB
V_n	Output noise	$f=20\text{Hz}-20\text{kHz}$, input AC grounded		63		μV

Parameter		Test conditions	Min	Typ	Max	Units
SNR	Signal-to-noise ratio	$V_{DD} = 5\text{ V}$, $P_o = 1\text{ W}$, $R_L = 8\Omega + 33\mu\text{H}$		91		dB
Mode 2						
I_q	Quiescent current	$V_{DD} = 3.6\text{ V}$, Input AC grounded, no load		3.0		mA
η	Efficiency	$V_{DD} = 3.6\text{ V}$, $P_o = 0.8\text{ W}$, $R_L = 8\Omega + 33\mu\text{H}$		90		%
A_v	Voltage gain			12		V/V
PSRR	Power suppression ration	$V_{DD} = 4.2\text{ V}$, $V_{p-p_sin} = 200\text{ mV}$	217Hz		68	dB
			1kHz		67	dB
THD+N	Total harmonic distortion plus noise	$V_{DD} = 4.2\text{ V}$, $P_o = 0.5\text{ W}$, $R_L = 8\Omega + 33\mu\text{H}$		0.013		%
		$V_{DD} = 3.6\text{ V}$, $P_o = 0.25\text{ W}$, $R_L = 8\Omega + 33\mu\text{H}$		0.019		%
P_o NCN	NCN output power	$V_{DD} = 4.2\text{ V}$, $R_L = 8\Omega + 33\mu\text{H}$, $f = 1\text{ kHz}$		0.8		W
T_{AT}	Attack time(-13.5dB)	$V_{DD} = 4.2\text{ V}$		50		ms
T_{RL}	Release time(13.5dB)	$V_{DD} = 4.2\text{ V}$		1.2		s
A_{MAX}	Max attenuation	$V_{DD} = 4.2\text{ V}$		-13.5		dB
V_n	Output noise	$f = 20\text{ Hz} - 20\text{ kHz}$, input AC grounded		90		μV
SNR	Signal-to-noise ratio	$V_{DD} = 5\text{ V}$, $P_o = 1\text{ W}$, $R_L = 8\Omega + 33\mu\text{H}$		89		dB
Mode 4						
I_q	Quiescent current	$V_{DD} = 3.6\text{ V}$, Input AC grounded, no load		2.79		mA
η	Efficiency	$V_{DD} = 3.6\text{ V}$, $P_o = 0.8\text{ W}$, $R_L = 8\Omega + 33\mu\text{H}$		78		%
A_v	Voltage gain			12		V/V
PSRR	Power suppression ratio	$V_{DD} = 4.2\text{ V}$, $V_{pp_sin} = 200\text{ mV}$	217Hz		67	dB
			1kHz		66	dB
THD+N	Total harmonic distortion plus noise	$V_{DD} = 4.2\text{ V}$, $P_o = 0.5\text{ W}$, $R_L = 8\Omega + 33\mu\text{H}$		0.3		%
		$V_{DD} = 3.6\text{ V}$, $P_o = 0.25\text{ W}$, $R_L = 8\Omega + 33\mu\text{H}$		0.4		%
V_n	Output noise	$f = 20\text{ Hz} - 20\text{ kHz}$, input AC grounded		115		μV
SNR	Signal-to-noise ratio	$V_{DD} = 5\text{ V}$, $P_o = 1\text{ W}$, $R_L = 8\Omega + 33\mu\text{H}$		88		dB
one-wire pulse control						
T_H	CTRL high level hold time	$V_{DD} = 2.5\text{ V to } 5.5\text{ V}$	0.75	2	10	μs
T_L	CTRL low level hold time	$V_{DD} = 2.5\text{ V to } 5.5\text{ V}$	0.75	2	10	μs
T_{LATCH}	CTRL turn on delay time	$V_{DD} = 2.5\text{ V to } 5.5\text{ V}$			500	μs
T_{OFF}	CTRL turn off delay time	$V_{DD} = 2.5\text{ V to } 5.5\text{ V}$			500	μs


Typical Characteristics

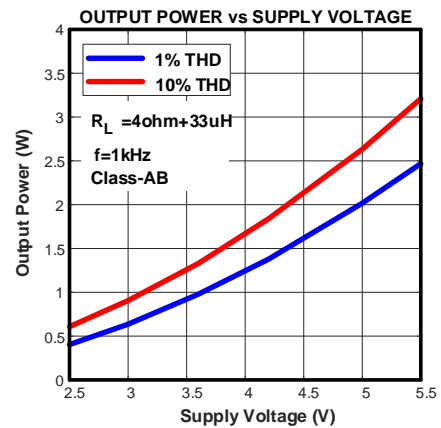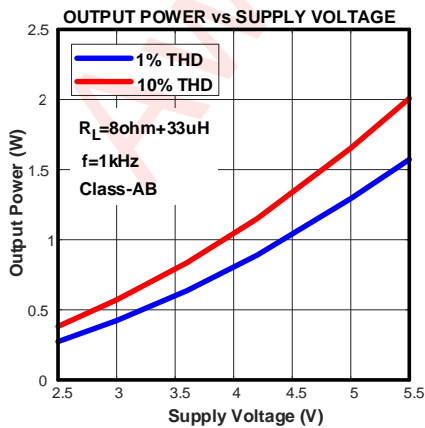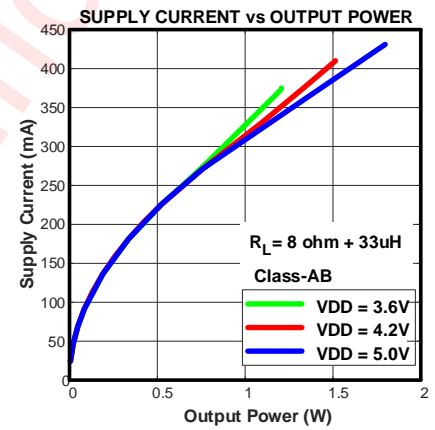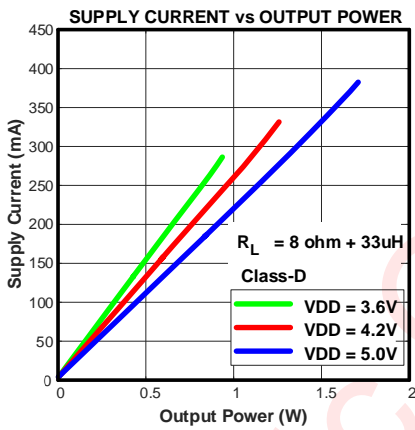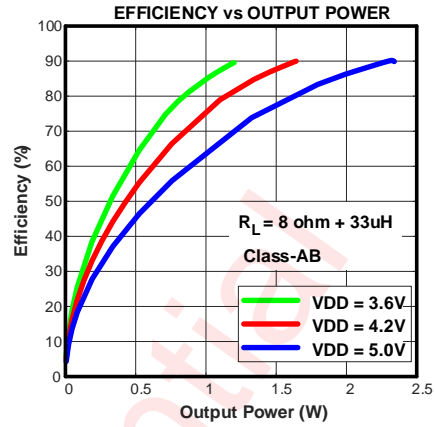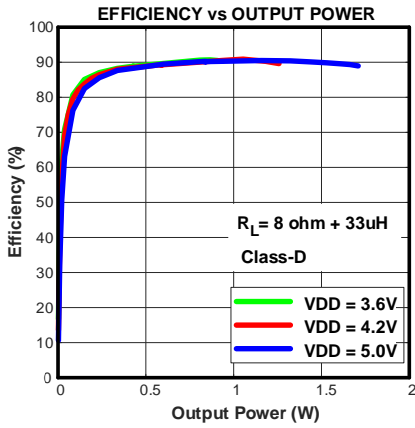

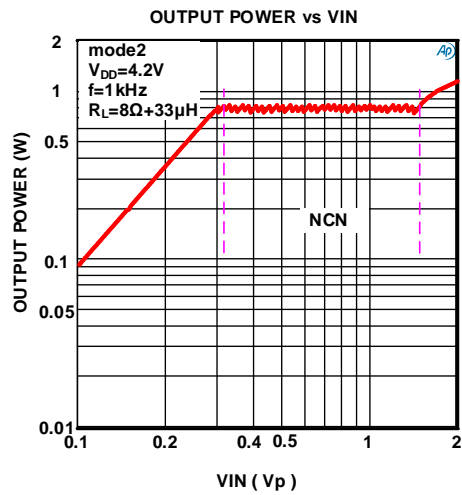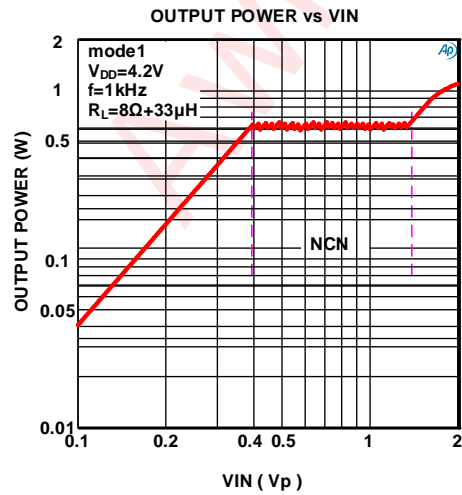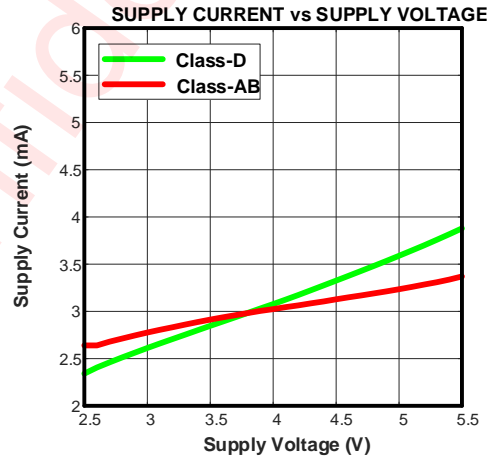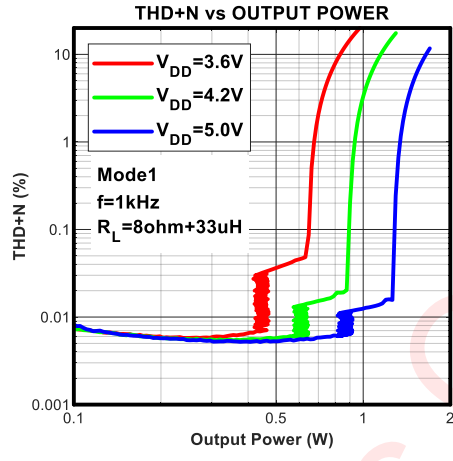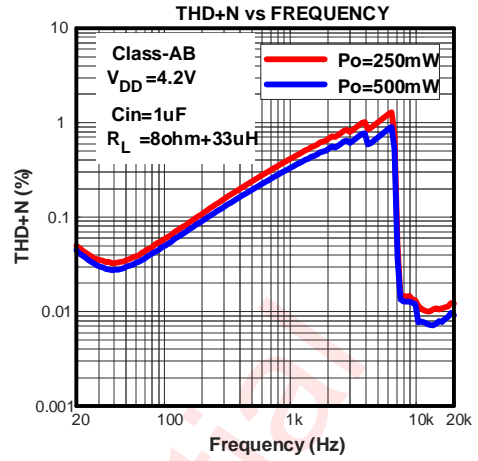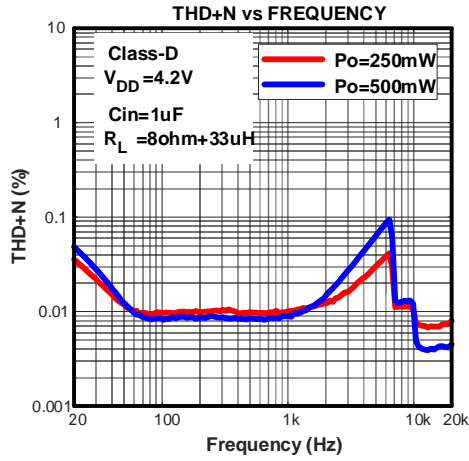


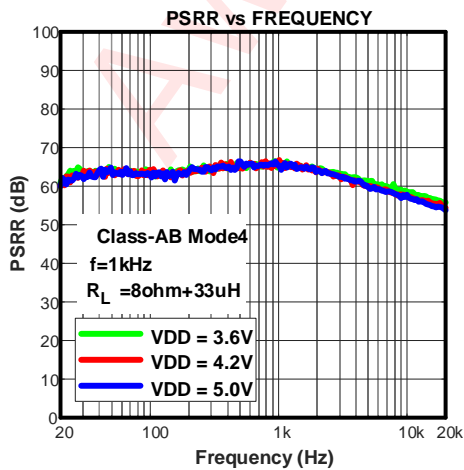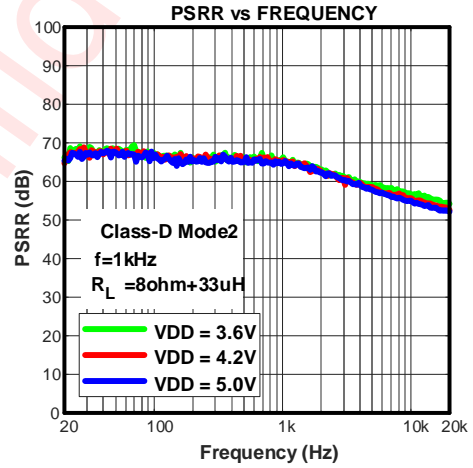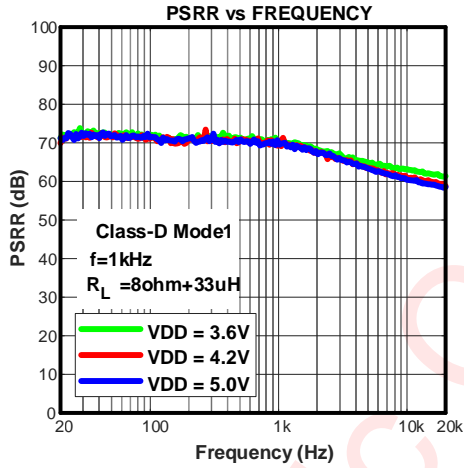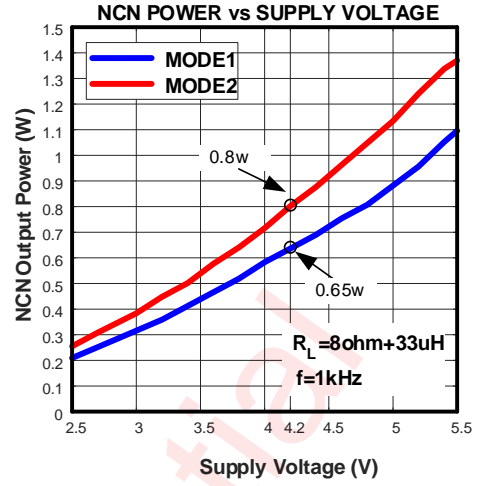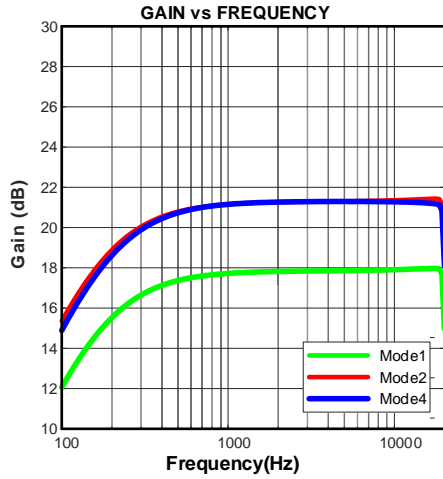


Class_D start up time

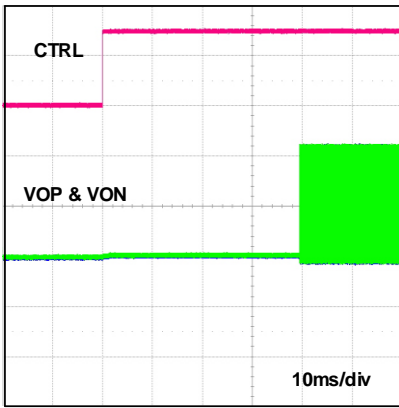


Class_D shutdown time

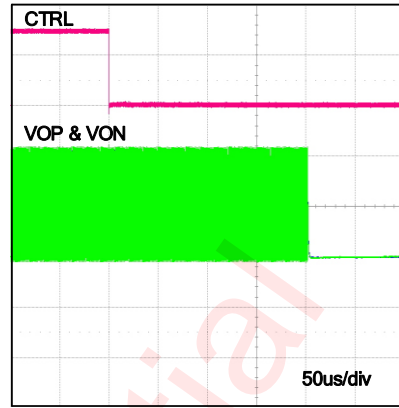


Class_AB start up time

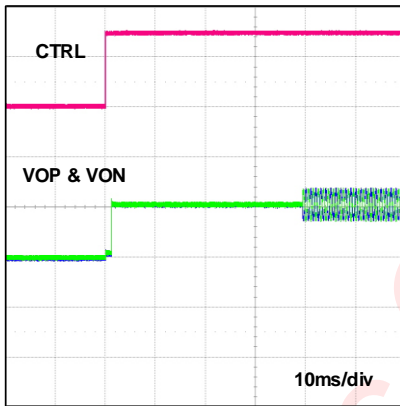


Class_AB shutdown time

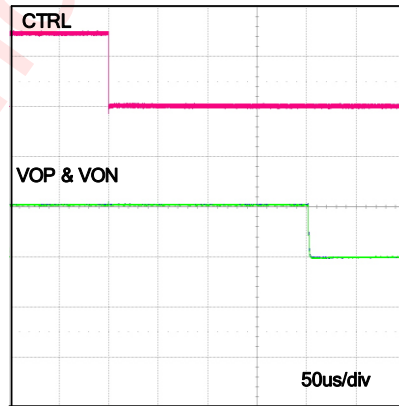

NCN attack time

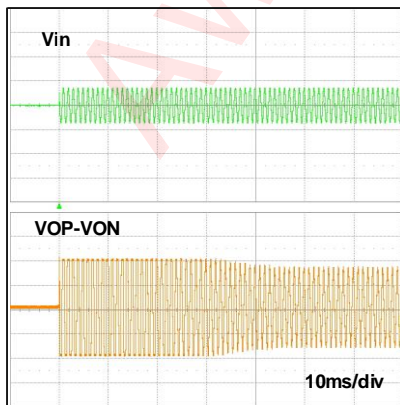

NCN release time

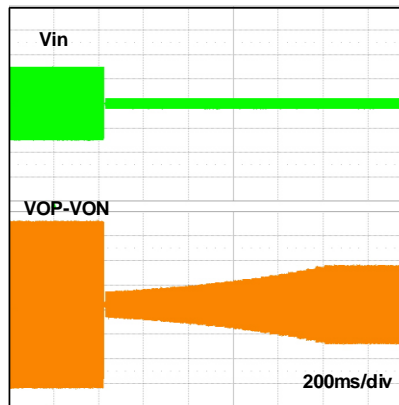

Operation

The AW8155B is a non-crack-noise (NCN), ultra-low-EMI, filter-free, AB/D output mode selection, second generation Class-D audio amplifier. Ultra low THD+N, Unique NCN function, which adjusts the system gain automatically while detecting the “Crack” distortion of output signal, protects the speaker from damage at high power levels and brings the most comfortable listening experience to the customers.

AW8155B NCN output power can be set to 0.65W or 0.8W for different speaker, this feature is embedded in order to protect speakers from damage caused by an excessive sound level.

The AW8155B features a unique RNS technology, which effectively reduces RF energy, attenuate the RF TDD-noise, an acceptable audible level to the customer.

The AW8155B features the EEE (Enhanced Emission Elimination) function which greatly reduces EMI over the full bandwidth.

The filter-free PWM architecture and internal gain setting reduces external components count, board area consumption, system cost and simplifies the design. The over-current, over-temperature is prepared inside of the device.

The AW8155B is available in an ultra small QFN 1.5mmX1.5mm-9L package. The AW8155B is specified over the industrial temperature range of -40°C to +85°C.

One-wire pulse control

One wire pulse control technology only needs a single GPIO port to operate the chip, complete a variety of functions, it is very popular in the area of the GPIO port shortage and portable systems.

When the control signal line is longer, because of the signal integrity or radio frequency interference problem, it will produce the narrow glitch signal. Awinic one wire pulse control technology integrated the Deglitch circuit in internal control pin, which can effectively eliminate the influence of the glitch signal, as shown in figure 8.

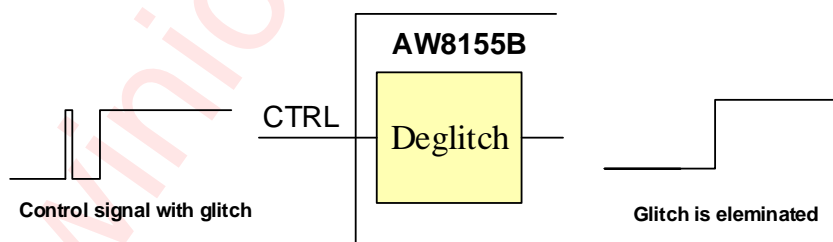


Figure 8. Awinic Deglitch function diagram

The traditional one wire pulse control technology still receives pulse signal from control port when chip is startup, so when the master control chip (such as mobile phone BB) sends wrong pulse during normal operation, the system will enter into error states. AW8155B uses one wire pulse latch technology, after the master control chip has sent pulses, the state will be latched, no longer receive the latter mis-sending pulse signals, as shown in figure 9.

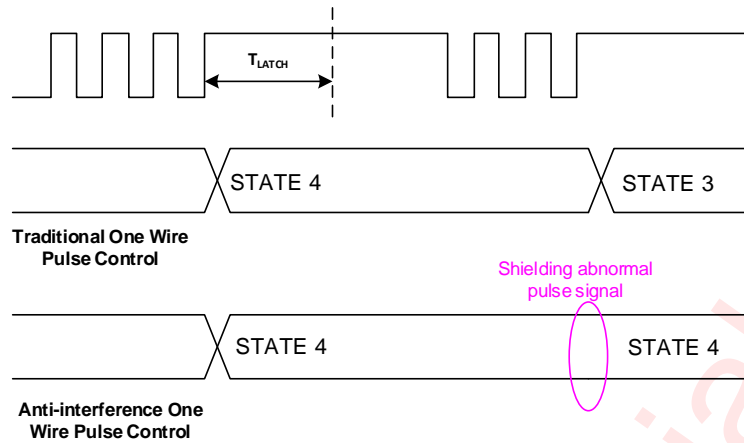


Figure 9. Anti-interference One Wire Pulse Control Function Diagram

AW8155B select each mode by one-wire pulse control, as shown in figure 10. When CTRL pin pull high form shutdown mode, there is one rising edge, AW8155B start to work and set Gain=18dB, NCN level=0.65W. When high-low-high signal set to CTRL pin, there are two rising edges, AW8155B start to work and set Gain=21.5dB, NCN level=0.8W. When there are three rising edges, internal test mode is enable. When there are four rising edges, AW8155B start to work in Class AB mode, while gain is to be set 21.5dB.

As shown in figure 10, when CTRL pull down above 1ms, AW8155B will enter shutdown mode.

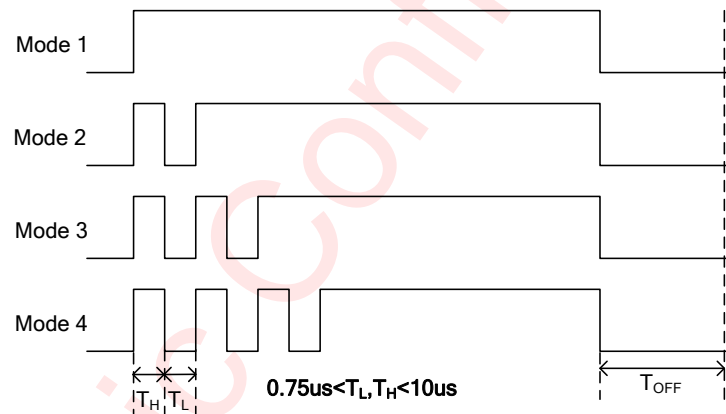


Figure 10. One-Wire pulse control

When AW8155B work in different mode, PIN CTRL should be low above 1ms which make the AW8155B shut down, Then series pulse make the AW8155B work in right mode.




Figure 11. One-wire pulse mode switch

RNS (RF TDD Noise Suppression)

TDD Noise Causes

GSM cell phones use TDMA (Time Division Multiple Access) slot sharing technology. The time is divided into periodic frames in TDMA, and each frame is subdivided into a plurality of time slots. In order to transmit signals to the base station, the signals sent from the base stations to the plurality of mobile terminals are arranged in a predetermined time slot in the transmission. In this case, each TDMA frame contains 8 time slots, the entire frame is about 4.615ms long, and each slot time is 0.577ms.

With GSM handset, the RF power amplifier will transmit once every 4.615ms (217Hz), and the signal will produce intermittent Burst current and strong electromagnetic radiation. Intermittent Burst current will form a power fluctuation of 217 Hz; High frequency (900MHz and 1800MHz) RF signals form a 217Hz RF envelope signal. 217Hz power fluctuations will be conducted through the conduction to the audio signal path, 217Hz RF envelope signal will be coupled through the radiation into the audio signal path, if the protection is not good, it will produce an audible TDD Noise, which includes the 217Hz noise And a harmonic noise signal of 217 Hz.

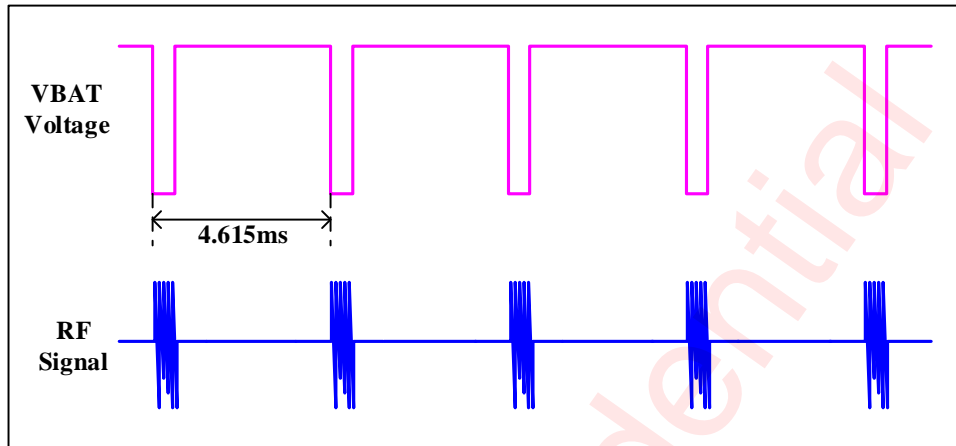


Figure 12. Schematic Diagram of Power Supply Voltage and RF Signal during GSM RF Operation

RNS fully inhibit the conduction and radiation interference by the AWINIC unique circuit architecture. Effectively improve the ability to suppress TDD Noise.

Conduction noise suppression

When the RF power amplifier is operating, it will draw the current from the battery by 217Hz frequency, Power supply will be introduced to 217Hz power ripple since the battery has a certain internal resistance, it will be coupled to the speaker through the audio power amplifier. The ability to suppress power fluctuations depends on the PSRR of the audio power amplifier.

$$PSRR = 20 \log \left(\frac{v_{dd_ac}}{v_{out_ac}} \right)$$

Due to the input and output of the fully differential amplifier is perfectly symmetrical, theoretically, the effect of the power supply fluctuation on the two outputs is exactly the same, and the differential output is completely unaffected by the power supply fluctuation. In practice, due to process bias and other factors, the amplifier will have a certain mismatch, PSRR is generally better than 60dB, it shows the output relative to the power fluctuations can be reduced by 1000 times, such as 500mVp power fluctuations, the differential output of 0.5 mV, which basically can meet the application requirements.

But in practical applications, the power amplifier may encounter conduction of TDD Noise problem even if its PSRR is 60dB or 80dB, why is this? Because we also need to consider the impact of peripheral power mismatches of audio power amplifiers

For conventional audio power amplifiers, when the input resistor R_{in} and the input capacitor C_{in} mismatch, will greatly affect the audio power amplifier PSRR indicators, in the case of 24dB gain, PSRR will be weakened to 46dB or so if the input resistance and Capacitor with 1% mismatch. PSRR will be weakened to 28dB or so if the input resistance and input capacitance mismatch with 10% mismatch, when the power fluctuations, it is easy to produce audible TDD Noise.

In order to enhance the audio power amplifier PSRR in the input resistance and input capacitance mismatch case, AW8155B features a unique conduction noise suppression circuit, making the power amplifier to maintain a high PSRR value even in the input resistance, the input capacitance deviation of 10% or more, this greatly inhibits the generation of conducted noise.

Radiation noise suppression

Input traces, output traces, horn loops, and even power and ground loops are likely to be subject to RF radiation interference in the audio signal module, longer input traces and output traces similar to the antenna, especially vulnerable RF radiation effects.

The reasonable PCB layout can reduce the influence of RF radiation in the design, such as shorten the line length of input and output as much as possible; audio devices should be shielded and far away from the RF antenna, maintain the integrity of the device to audio signal pathway; to increase the small bypass capacitor RF signals in the sensitive nodes. However, in practical applications, PCB layout is difficult to fully consider the influence of RF radiation on the audio signal path, and some RF energy will still be coupled to the audio signal path to form audible TDD Noise. Therefore, AW8155B features a unique RF radiation suppression circuit, a shielding layer inside the chip, effectively prevent high frequency energy into RF chip, to ensure that the drive signal of the amplifier provided to the speaker will not be affected by the antenna RF radiation, thus avoiding the antenna RF Radiation caused by TDD Noise.

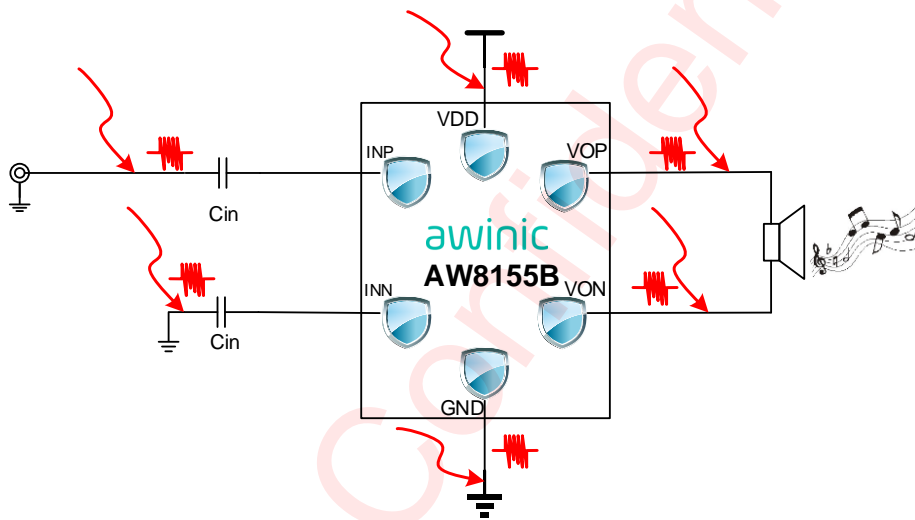


Figure 13. RF Energy Coupling Diagram

NCN

In audio application, output signal will be undesirable distortion caused by too large input and power supply voltage down with battery, and clipped output signal may cause permanent damage to the speaker. The AW8155B features unique non-crack-noise (NCN) Function, which adjusts system gain automatically to generate desired output by detecting the “Crack” distortion of output signal, protects the speaker from damage at high power levels and brings the most comfortable listening experience to the customers.

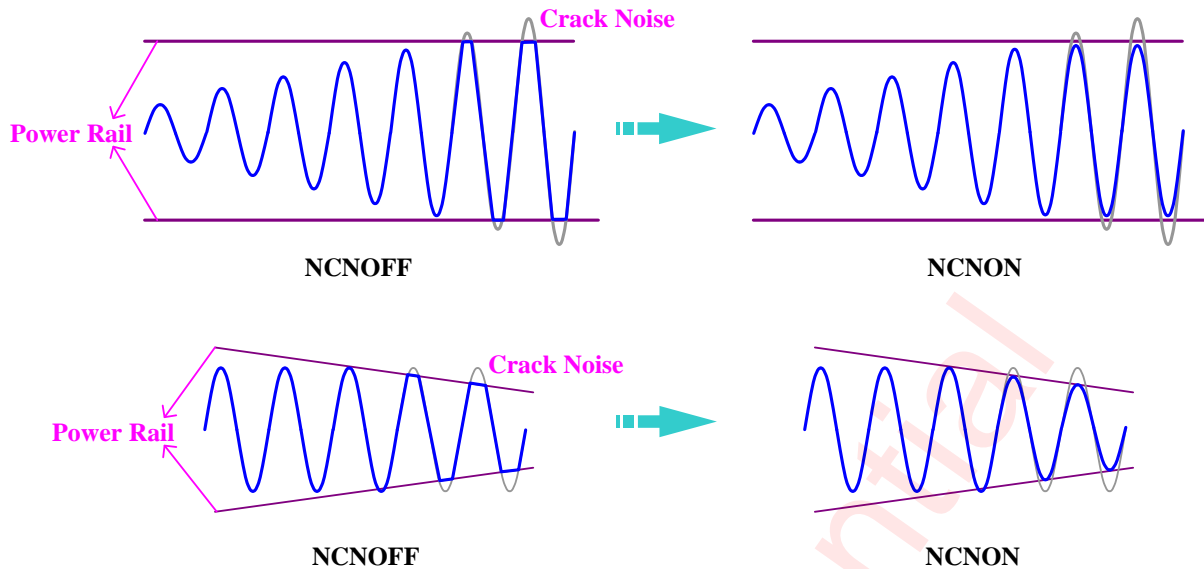


Figure 14. NCN Function Diagram

Attack time

Attack time is the time it takes for the gain to be reduced once the audio signal exceeds the NCN threshold. Fast attack times allow the NCN to react quickly and prevent transients such as symbol crashes from being distorted. However, fast attack times can lead to volume pumping, where the gain reduction and release becomes noticeable, as the NCN cycles quickly. Slower attack times cause the NCN to ignore the fast transients, and instead act upon longer, louder passages. Selecting an attack time that is too slow can lead to increased distortion in the case of the No Clip function. Attack time is set 40ms~55ms in AW8155B.

Release time

Release time is the time it takes for the gain to return to its normal level once the audio signal returns below the NCN threshold. A fast release time allows the NCN to react quickly to transients, preserving the original dynamics of the audio source. However, similar to a fast attack time, a fast release time contributes to volume pumping. A slow release time reduces the effect of volume pumping. Release time is set 0.9s~1.3s in AW8155B.

Filter-Free Modulation Scheme

The AW8155B features a filter-free PWM architecture that reduces the LC filter of the traditional Class-D amplifier, increasing efficiency, reducing board area consumption and system cost.

Pin-Compatible with AW8155(A), AW8145, no VREF capacitor

The AW8155B is pin compatible with AW8155(A) and AW8145. Without VREF 1 uF capacitor it can achieve the same performance as AW8145, which make the PCB design more convenient.

EEE

The AW8155B features a unique Enhanced Emission Elimination (EEE) technology, that controls fast transition on the output, greatly reduces EMI over the full bandwidth.

Pop-Click Suppression

The AW8155B features unique timing control circuit, that comprehensively suppresses pop-click noise, eliminates audible transients on shutdown, wakeup, and power-up/down.

Efficiency

Efficiency of a Class D amplifier is attributed to the switching operation of the output stage transistors. In a Class D amplifier, the output transistors act as current steering switches and consume negligible additional power. Any power loss associated with the Class D output stage is mostly due to the I²R loss of the MOSFET on-resistance and supply current. The AW8155B features efficiency of 90%.

Protection Function

When a short-circuit occurs between VOP/VON pin and VDD/GND or VOP and VON, the over-current circuit shutdown the device, preventing the device from being damaged. When the condition is removed, the AW8155B reactivate itself. When the junction temperature is high, the over-temperature circuit shutdown the device. The circuit switches back to normal operation when the temperature decreases to safe levels.

APPLICATIONS INFORMATION

Supply Decoupling Capacitor (C_s)

The AW8155B is a high-performance audio amplifier that requires adequate power supply decoupling. For higher frequency transients, a good low equivalent-series-resistance (ESR) ceramic capacitor, typically 1μF, placed as close as possible to the device VDD pin works best. For filtering lower-frequency noise signals, a 10 μF or greater capacitor placed near the audio power amplifier would also help.

Input Capacitor

The input coupling capacitor blocks the DC voltage at the amplifier input terminal. The input capacitors and internal input resistors (28.5KΩ) form a high-pass filter with the corner frequency, f_c.

$$f_c = \frac{1}{2\pi R_{in} C_{in}} = 169\text{Hz}$$

Setting the high-pass filter point high can block the 217Hz GSM noise coupled to inputs. Better matching of the input capacitors improves performance of the circuit and also help to suppress pop-click noise.

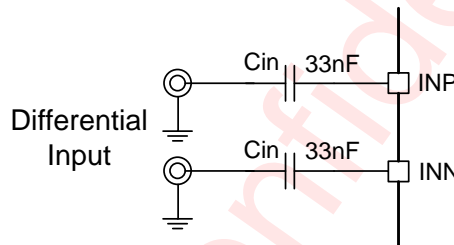


Figure 15. Differential Input

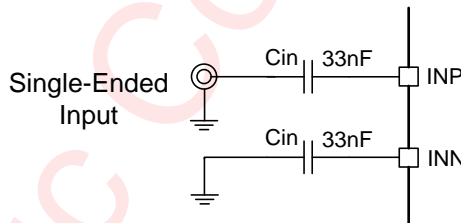


Figure 16. Single-Ended Input

Ferrite Chip Bead and Capacitor

The AW8155B passed CE radiated emissions with no ferrite chip beads and capacitors with speaker trace wires 24 inch. Use ferrite chip beads and capacitors if device near the EMI sensitive circuits and/or there are long leads from amplifier to speaker, placed as close as possible to the output pin.


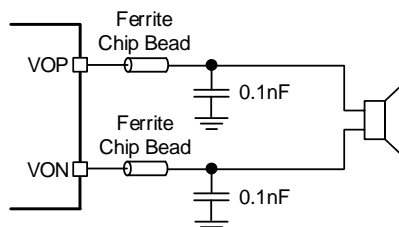


Figure 17. Ferrite Chip Bead and capacitor


PCB LAYOUT CONSIDERATION

In order to obtain excellent performance of AW8155B, PCB layout must be carefully considered. The design consideration should follow the following principles:


1. Try to provide a separate short and thick power line to AW8155B, the copper width is recommended to be larger than 1.2mm. The decoupling capacitors should be placed as close as possible to power supply pin.
2. The input capacitors should be close to AW8155B INN and INP input pin, the input line should be parallel to suppress noise coupling.

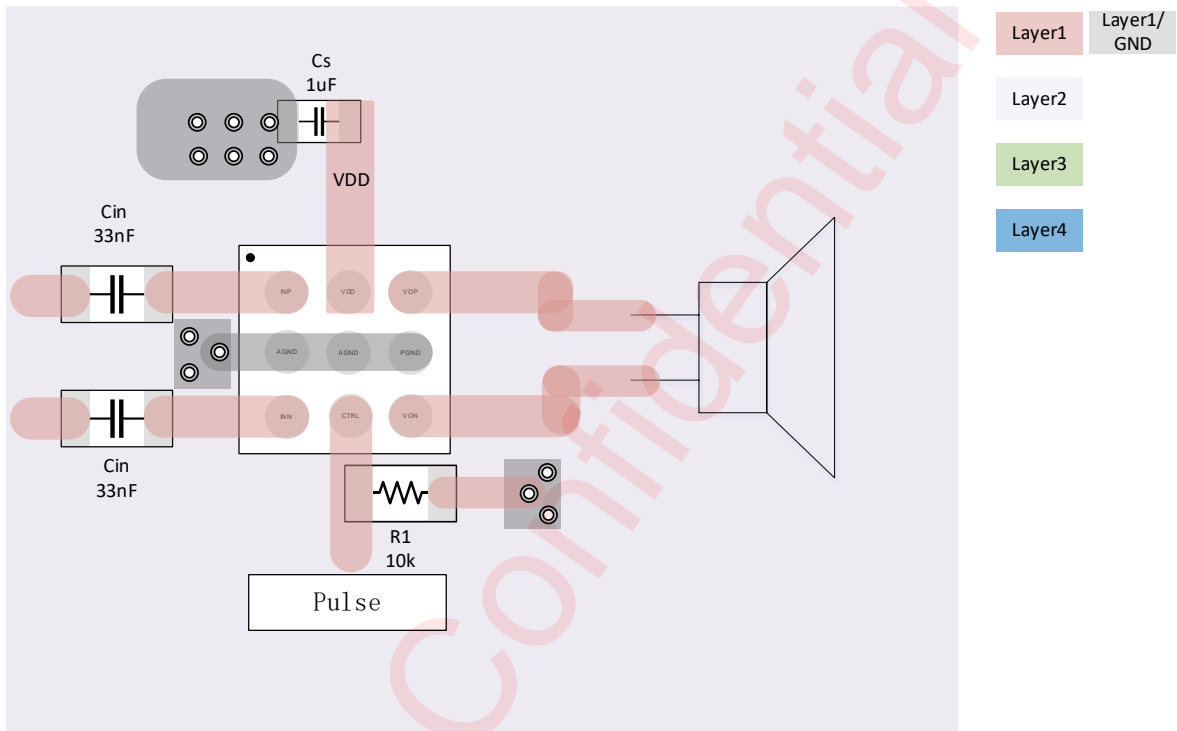

TAPE AND REEL INFORMATION

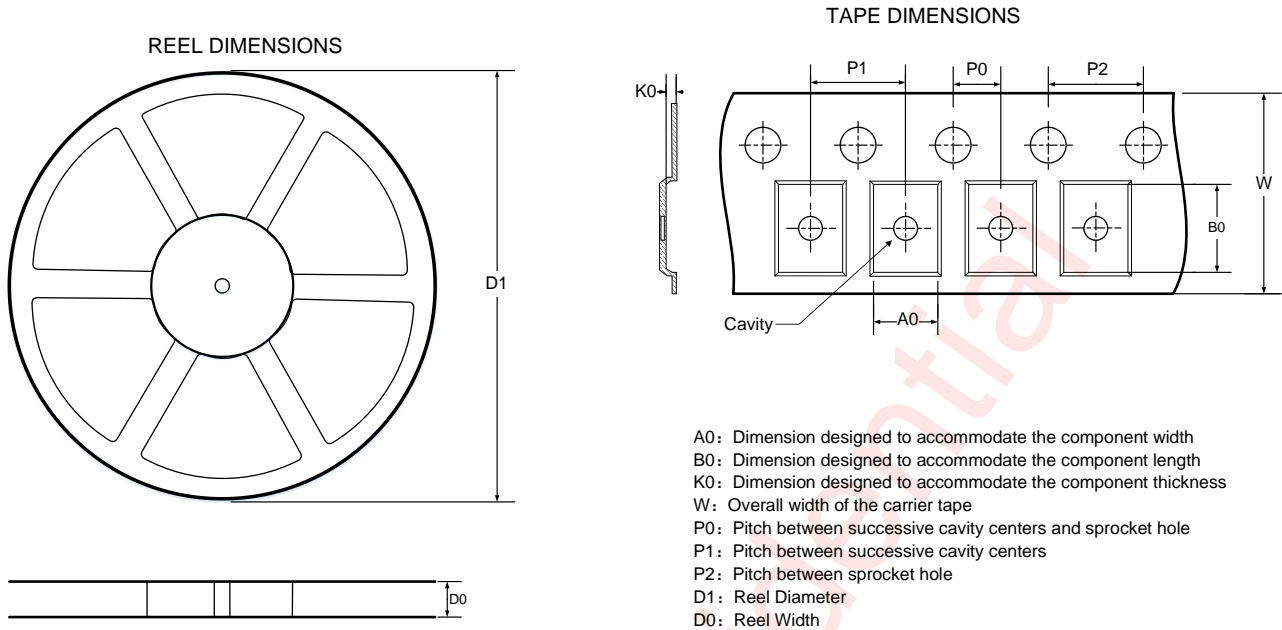

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

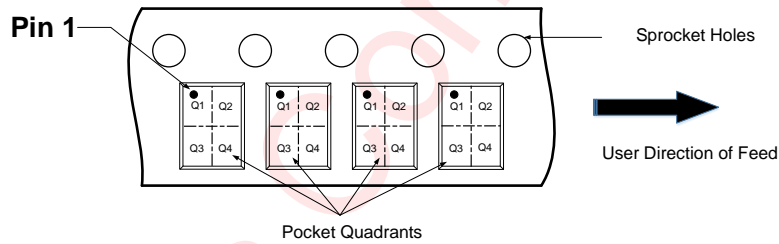


Note: The above picture is for reference only. Please refer to the value in the table below for the actual size

DIMENSIONS AND PIN1 ORIENTATION


D1 (mm)	D0 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
178.00	8.40	1.75	1.75	0.70	2.00	4.00	4.00	8.00	Q1

All dimensions are nominal


PACKAGE DESCRIPTION

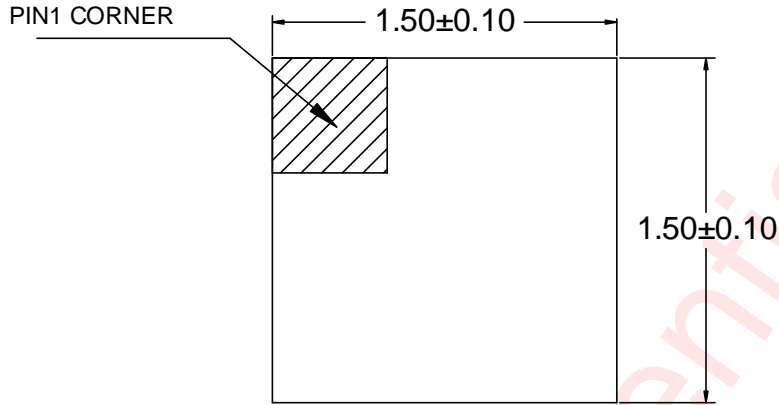

Top View

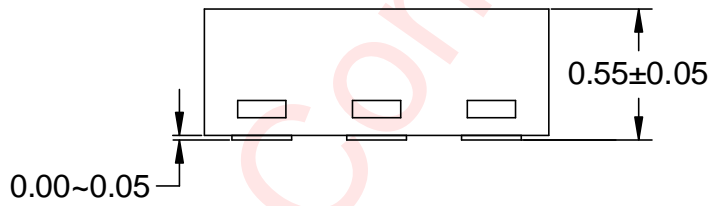



Side View

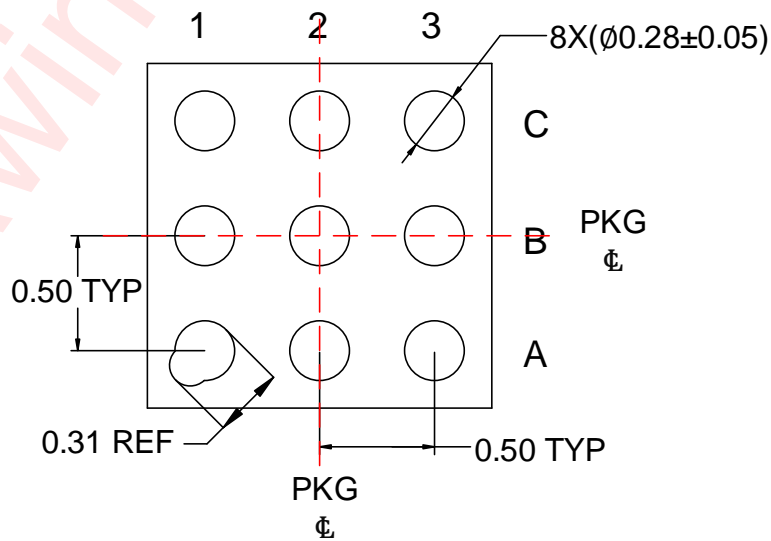


Bottom View

Unit: mm

LAND PATTERN DATA

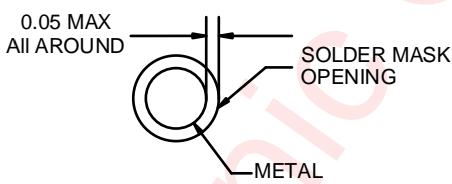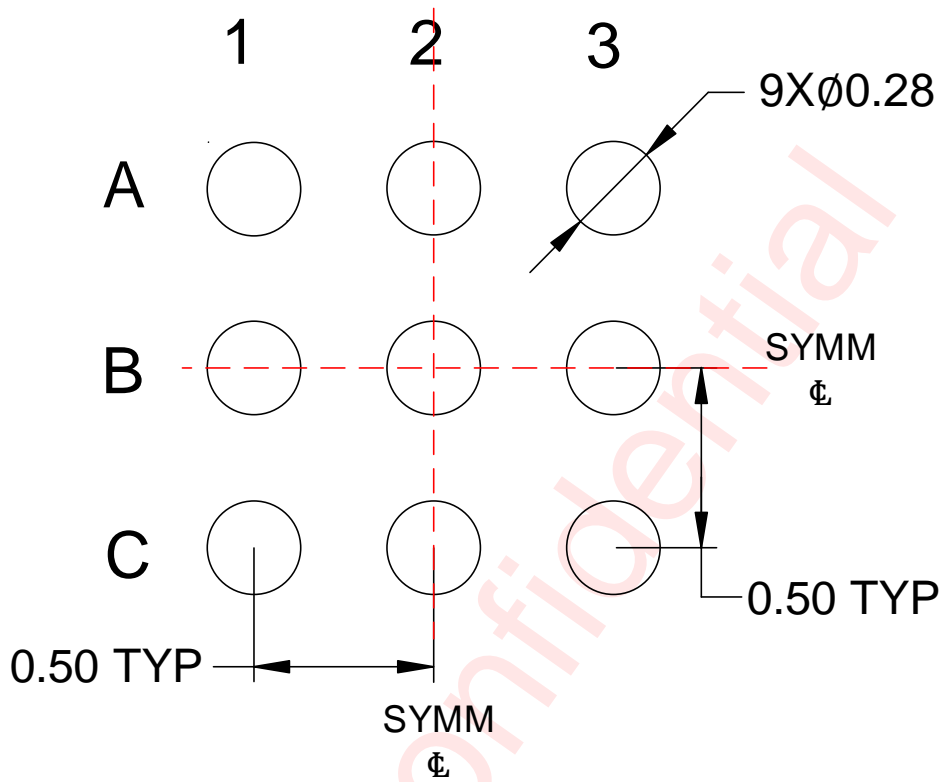

NON-SOLDER MASK DEFINED

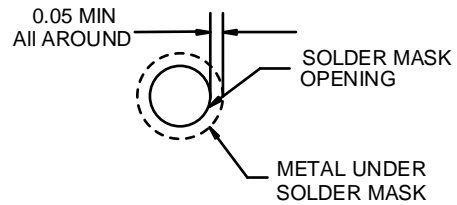

SOLDER MASK DEFINED

Unit: mm

REVISION HISTORY

Version	Date	Change Record
V1.0	Dec.2025	Officially Released

Awinic Confidential

DISCLAIMER

All trademarks are the property of their respective owners. Information in this document is believed to be accurate and reliable. However, Shanghai AWINIC Technology Co., Ltd (AWINIC Technology) does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

AWINIC Technology reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. Customers shall obtain the latest relevant information before placing orders and shall verify that such information is current and complete. This document supersedes and replaces all information supplied prior to the publication hereof.

AWINIC Technology products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an AWINIC Technology product can reasonably be expected to result in personal injury, death or severe property or environmental damage. AWINIC Technology accepts no liability for inclusion and/or use of AWINIC Technology products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications that are described herein for any of these products are for illustrative purposes only. AWINIC Technology makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

All products are sold subject to the general terms and conditions of commercial sale supplied at the time of order acknowledgement.

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Reproduction of AWINIC information in AWINIC data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. AWINIC is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of AWINIC components or services with statements different from or beyond the parameters stated by AWINIC for that component or service voids all express and any implied warranties for the associated AWINIC component or service and is an unfair and deceptive business practice. AWINIC is not responsible or liable for any such statements.