



钜地半导体
Tudi Semiconductor

Product Specification

TUDI-LM2902, LM2904

AUTOMOTIVE COMPLIANT DUAL AND
QUAD OPERATIONAL AMPLIFIERS

网址 www.sztdbdt.com Q

用芯智造 · 卓越品质



**semiconductor device
manufacturer**

- Design
- research and development
- production
- and sales



Features

- Wide Power Supply Voltage Range
- Single Supply: 3V to 36V
- Dual Supplies: $\pm 1.5\text{V}$ to $\pm 18\text{V}$
- Very Low Supply Current Drain – Independent of Supply Voltage
- LM2904Q: $500\mu\text{A}$
- LM2902Q: $700\mu\text{A}$
- Low Input Bias Current: 20nA
- Low Input Offset Voltage
- A Versions: 1mV (typ)
- Non-A Version: 2mV (typ)
- Large DC Voltage Gain: 100dB
- Wide Bandwidth (Unity Gain): 700kHz (Temperature Compensated)
- Internally Compensated with Unity Gain
- Input Common-Mode Voltage Range Includes Ground
- Differential Input Voltage Range Equal to Power Supply Voltage
- Large Output Voltage Swing: 0V to $V_{\text{CC}} - 1.5\text{V}$
- Qualified to AEC-Q100 Grade 1

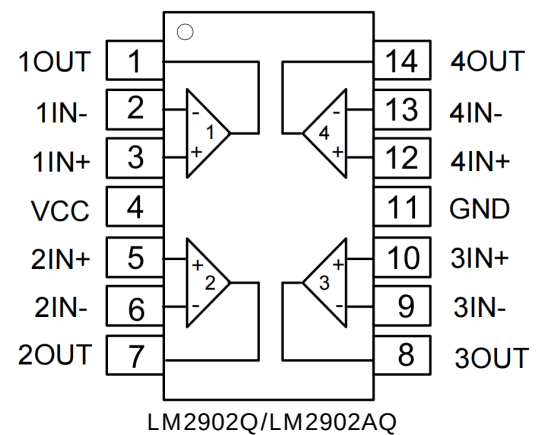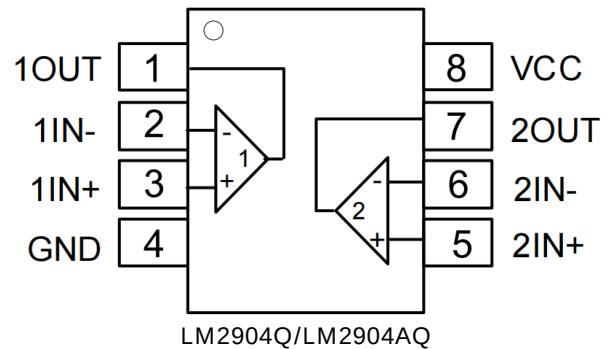

Description


The LM2902Q/LM2902AQ/LM2904Q/LM2904AQ series consist of two or four independent high-gain operational amplifiers with very low input offset voltage specification. They are designed to operate from a single power supply over a wide range of voltages; however, operation from split power supplies is also possible. They offer low power supply current independent of the magnitude of the power supply voltage.

The LM2904Q/LM2904AQ dual devices are available in SO-8, TSSOP- 8 and MSOP-8 packages; the LM2902Q/LM2902AQ quad devices are available in SO-14 and TSSOP-14 packages. All of them are in industry-standard pin outs, and use “ green ” mold compound as standard.

The LM2902Q/LM2902AQ/LM2904Q/LM2904AQ are characterized for operation from -40°C to $+125^{\circ}\text{C}$, qualified to AEC-Q100 Grade 1 and are automotive compliant, supporting PPAPs.



Typical Applications Circuit

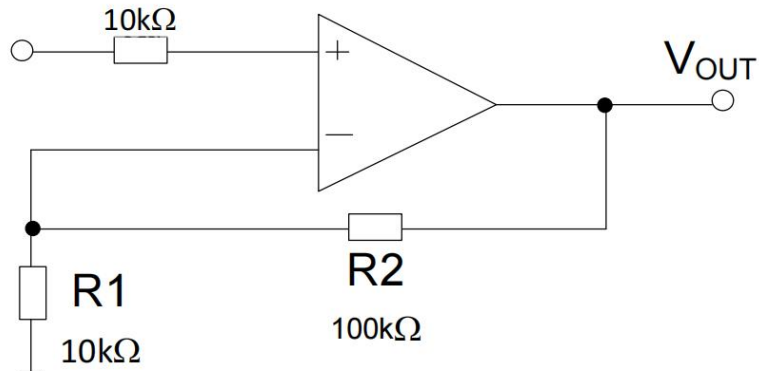


Pin Descriptions

Pin Number	Pin Name	Function
LM2902Q/LM2902AQ		
1	1OUT	Channel 1 Output
2	1IN-	Channel 1 Inverting Input
3	1IN+	Channel 1 Non-Inverting Input
4	VCC	Chip Supply Voltage
5	2IN+	Channel 2 Non-Inverting Input
6	2IN-	Channel 2 Inverting Input
7	2OUT	Channel 2 Output
8	3OUT	Channel 3 Output
9	3IN-	Channel 3 Inverting Input
10	3IN+	Channel 3 Non-Inverting Input
11	GND	Ground
12	4IN+	Channel 4 Non-Inverting Input
13	4IN-	Channel 4 Inverting Input
14	4OUT	Channel 4 Output
LM2904Q/LM2904AQ		
1	1OUT	Channel 1 Output
2	1IN-	Channel 1 Inverting Input
3	1IN+	Channel 1 Non-Inverting Input
4	GND	Ground
5	2IN+	Channel 2 Non-Inverting Input
6	2IN-	Channel 2 Inverting Input
7	2OUT	Channel 2 Output
8	VCC	Chip Supply Voltage



Functional Block Diagram

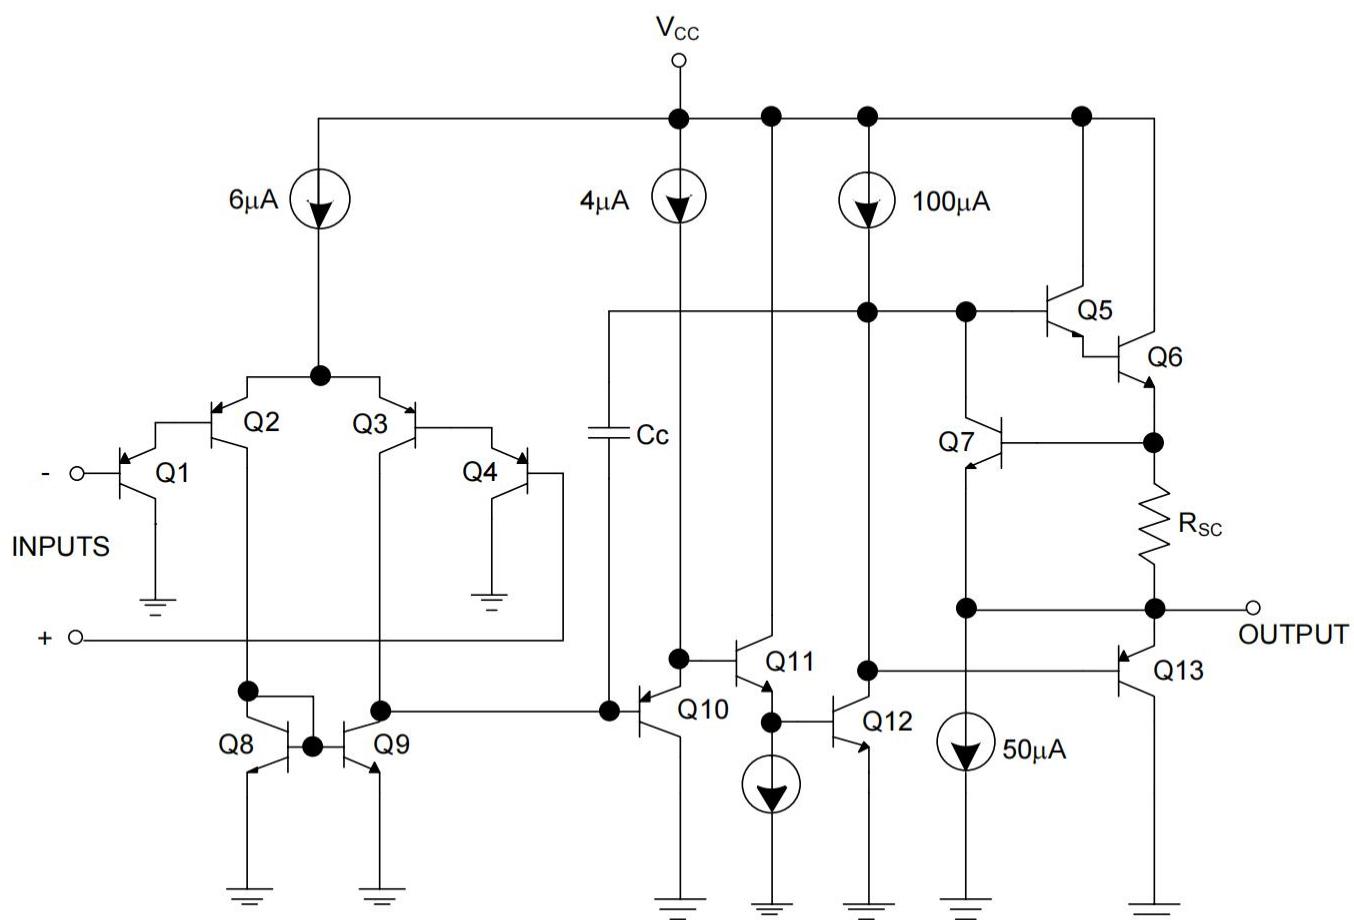

Functional Block Diagram of LM2902Q/LM2902AQ/LM2904Q/LM2904AQ
(Each Amplifier)



Absolute Maximum Ratings (Note 4) (@T_A = +25°C, unless otherwise specified.)

Symbol	Parameter		Rating	Unit
V _{CC}	Supply Voltage		±18 or 36	V
V _{ID}	Differential Input Voltage		36	V
V _{IN}	Input Voltage		-0.3 to +36	V
θ _{JA}	Package Thermal Impedance (Note 5)	SO-8	150	°C/W
		TSSOP-8	175	
		MSOP-8	200	
		SO-14	89	
		TSSOP-14	100	
—	Output Short-Circuit to GND (One Amplifier) (Note 6)	V _{CC} ≤ 15V and T _A = +25°C	Continuous	—
T _A	Operating Temperature Range		-40 to +125	°C
T _J	Operating Junction Temperature		+150	°C
T _{STG}	Storage Temperature Range		-65 to +150	°C

- Notes:
- Stresses greater than those listed under *Absolute Maximum Ratings* can cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to *Absolute Maximum Ratings* for extended periods can affect device reliability.
 - Maximum power dissipation is a function of T_{J(MAX)}, θ_{JA}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is P_D = (T_{J(MAX)} - T_A) / θ_{JA}. Operating at the absolute maximum T_J of +150°C can affect reliability.
 - Short circuits from outputs to V_{CC} or ground can cause excessive heating and eventual destruction.

ESD Ratings

Parameter		Rating	Unit
Human Body Mode ESD Protection (Note 7)	SO-14	500	V
	TSSOP-14	500	
	SO-8	500	
	TSSOP-8	500	
	MSOP-8	< 500	
Charge Device Mode ESD Protection	SO-14	1,000	
	TSSOP-14		
	SO-8		
	TSSOP-8		
	MSOP-8		

Note: 7. Human body model, 1.5kΩ in series with 100pF.

Recommended Operating Conditions (Over Operating Free-Air Temperature Range, unless otherwise noted.)

Parameter		Min	Max	Unit
Supply Voltage	Single Supply	2	36	V
	Dual Supply	±1	±18	
Ambient Temperature Range		-40	+125	°C
Junction Temperature Range		-40	+125	



Electrical Characteristics (Notes 8 and 9) (@ $V_{CC} = +5.0V$, $T_A = +25^\circ C$, unless otherwise specified.)

LM2902Q/LM2902AQ

Symbol	Parameter		Conditions		T _A	Min	Typ	Max	Unit	
V _{IO}	Input Offset Voltage		V _{IC} = V _{CMR} Minimum V _O = 1.4V V _{CC} = 5V to Maximum R _S = 0Ω		Non-A Device	T _A = +25°C	—	2	7	mV
						Full Range	—	—	10	
			A-Suffix Device		T _A = +25°C	—	1	2		
					Full Range	—	—	4		
ΔV _{IO} /ΔT	Input Offset Voltage Temperature Drift		R _S = 0Ω		Full Range	—	7	—	μV/°C	
I _B	Input Bias Current		I _{IN+} or I _{IN-} with OUT in Linear Range V _{CMR} = 0V (Note 10)		T _A = +25°C	—	-20	-200	nA	
					Full Range	—	—	-500		
I _{IO}	Input Offset Current		I _{IN+} - I _{IN-} , V _{CM} = 0V		T _A = +25°C	—	2	50	nA	
					Full Range	—	—	150		
ΔI _{IO} /ΔT	Input Offset Current Temperature Drift		—		Full Range	—	10	—	pA/°C	
V _{CMR}	Input Common-Mode Voltage Range		V _{CC} = 30V (Note 11)		T _A = +25°C	0 to V _{CC} -1.5	—	—	V	
					Full Range	0 to V _{CC} -2.0	—	—		
I _{CC}	Supply Current (Four Amplifiers)		V _O = 0.5 V _{CC} , No Load	V _{CC} = 30V	Full Range	—	1.0	3.0	mA	
			V _O = 0.5 V _{CC} , No Load	V _{CC} = 5V	Full Range	—	0.7	1.2		
A _V	Voltage Gain		V _{CC} = 15V, V _{OUT} = 1V to 11V R _L ≥ 2kΩ		T _A = +25°C	25	100	—	V/mV	
					Full Range	15	—	—		
CMRR	Common Mode Rejection Ratio		DC, V _{CMR} = 0V to V _{CC} -1.5V		T _A = +25°C	60	70	—	dB	
PSRR	Power Supply Rejection Ratio		V _{CC} = 5V to 30V		T _A = +25°C	70	100	—	dB	
—	Amplifier to Amplifier Coupling		f = 1kHz to 20kHz (Input Referred) (Note 12)		T _A = +25°C	—	-120	—	dB	
I _{SINK}	Output Current	Sink	V _{IN-} = 1V, V _{IN+} = 0V, V _{CC} = 15V V _O = 200mV		T _A = +25°C	12	50	—	μA	
			V _{IN-} = 1V, V _{IN+} = 0V, V _{CC} = 15V V _O = 15V		T _A = +25°C	10	20	—	mA	
					Full Range	5	—	—		
I _{SOURCE}		Source	V _{IN+} = 1V, V _{IN-} = 0V, V _{CC} = 15V V _O = 0V		T _A = +25°C	-20	-40	-60		
					Full Range	-10	—	—		
I _{SC}	Short-Circuit to Ground		V _{CC} = 5V, GND = -5V, V _O = 0V		T _A = +25°C	—	±40	±60	mA	
V _{OH}	High-Level Output Voltage Swing		R _L = 10kΩ		T _A = +25°C	—	V _{CC} -1.5	—	V	
			V _{CC} = 30V	R _L = 2kΩ	Full Range	26	—	—		
				R _L ≥ 10kΩ		27	28	—		
V _{OL}	Low-Level Output Voltage Swing		R _L ≤ 10kΩ		Full Range	—	5	20	mV	

- Notes:
- Typical values are all at $T_A = +25^\circ C$ conditions and represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.
 - All limits are guaranteed by testing or statistical analysis. Limits over the full temperature ($-40 \leq T_A \leq +125^\circ C$) are guaranteed by design, but not tested in production.
 - The direction of the input current is out of the IC due to the PNP input stage. This current is essentially constant, independent of the state of the output so that no loading change exists on the input lines.
 - The input common-mode voltage of either input signal voltage should not be allowed to become negative by more than $0.3V$ (@ $+25^\circ C$). The upper end of the common-mode voltage range is $V_{CC}-1.5V$ (@ $+25^\circ C$), but either or both inputs can go to $+36V$ without damage, independent of the magnitude of V_{CC} .
 - Due to proximity of external components, ensure that coupling is not originating via stray capacitance between these external parts. This typically can be detected as this type of capacitance increases at higher frequencies.



Electrical Characteristics (continued) (Notes 8 and 9) (@ $V_{CC} = +5.0V$, $T_A = +25^\circ C$, unless otherwise specified.)

LM2904Q/LM2904AQ

Symbol	Parameter		Conditions		T _A	Min	Typ	Max	Unit	
V _{IO}	Input Offset Voltage		V _{IC} = V _{CMR} Minimum V _O = 1.4V V _{CC} = 5V to Maximum R _S = 0Ω		Non-A Device	T _A = +25°C	—	2	7	mV
						Full Range	—	—	10	
			A-Suffix Device	T _A = +25°C	—	1	2			
				Full Range	—	—	4			
ΔV _{IO} /ΔT	Input Offset Voltage Temperature Drift		R _S = 0Ω		Full Range	—	7	—	μV/°C	
I _B	Input Bias Current		I _{IN+} or I _{IN-} with OUT in Linear Range V _{CMR} = 0V (Note 10)		T _A = +25°C	—	-20	-250	nA	
					Full Range	—	—	-500		
I _{IO}	Input Offset Current		I _{IN+} - I _{IN-} , V _{CM} = 0V		T _A = +25°C	—	2	50	nA	
					Full Range	—	—	150		
ΔI _{IO} /ΔT	Input Offset Current Temperature Drift		—		Full Range	—	10	—	pA/°C	
V _{CMR}	Input Common-Mode Voltage Range		V _{CC} = 30V (Note 11)		T _A = +25°C	0 to V _{CC} -1.5	—	—	V	
					Full Range	0 to V _{CC} -2.0	—	—		
I _{CC}	Supply Current (Two Amplifiers)		V _O = 0.5 V _{CC} , No Load	V _{CC} = 30V	Full Range	—	0.7	2.0	mA	
			V _O = 0.5 V _{CC} , No Load	V _{CC} = 5V	Full Range	—	0.5	1.2		
A _V	Voltage Gain		V _{CC} = 15V, V _{OUT} = 1V to 11V R _L ≥ 2kΩ		T _A = +25°C	25	100	—	V/mV	
					Full Range	15	—	—		
CMRR	Common Mode Rejection Ratio		DC, V _{CMR} = 0V to V _{CC} -1.5V		T _A = +25°C	60	70	—	dB	
PSRR	Power Supply Rejection Ratio		V _{CC} = 5V to 30V		T _A = +25°C	70	100	—	dB	
—	Amplifier to Amplifier Coupling		f = 1kHz to 20kHz (Note 12)		T _A = +25°C	—	120	—	dB	
I _{SINK}	Output Current	Sink	V _{IN-} = 1V, V _{IN+} = 0V, V _{CC} = 15V V _O = 200mV		T _A = +25°C	12	50	—	μA	
			V _{IN-} = 1V, V _{IN+} = 0V, V _{CC} = 15V V _O = 15V		T _A = +25°C	10	20	—	mA	
		Full Range			5	—	—			
I _{SOURCE}		Source	V _{IN+} = 1V, V _{IN-} = 0V, V _{CC} = 15V V _O = 0V		T _A = +25°C	-20	-40	-60		
	Full Range				-10	—	—			
I _{SC}	Short-Circuit to Ground		V _{CC} = 5V, GND = -5V, V _O = 0V		T _A = +25°C	—	±40	±60	mA	
V _{OH}	High-Level Output Voltage Swing		R _L = 10kΩ		T _A = +25°C	V _{CC} -1.5	—	—	V	
			V _{CC} = 30V	R _L = 2kΩ	Full Range	26	—	—		
				R _L ≥ 10kΩ		27	28	—		
V _{OL}	Low-Level Output Voltage Swing		R _L ≤ 10kΩ		Full Range	—	5	20	mV	

- Notes:
- Typical values are all at $T_A = +25^\circ C$ conditions and represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.
 - All limits are guaranteed by testing or statistical analysis. Limits over the full temperature ($-40 \leq T_A \leq +125^\circ C$) are guaranteed by design, but not tested in production.
 - The direction of the input current is out of the IC due to the PNP input stage. This current is essentially constant, independent of the state of the output so that no loading change exists on the input lines.
 - The input common-mode voltage of either input signal voltage should not be allowed to become negative by more than $0.3V$ (@ $+25^\circ C$). The upper end of the common-mode voltage range is $V_{CC} - 1.5V$ (@ $+25^\circ C$), but either or both inputs can go to $+36V$ without damage, independent of the magnitude of V_{CC} .
 - Due to proximity of external components, ensure that coupling is not originating via stray capacitance between these external parts. This typically can be detected as this type of capacitance increases at higher frequencies.



AC Electrical Characteristics (Notes 8 and 9) (@ $V_{CC} = \pm 15.0V$, $T_A = +25^\circ C$, unless otherwise specified.)

LM2902Q/LM2902AQ

Symbol	Parameter	Conditions	Typ	Unit
SR	Slew Rate at Unity Gain	$R_L = 1M\Omega$, $C_L = 30pF$, $V_I = \pm 10V$	0.3	$V/\mu s$
B1	Unity Gain Bandwidth	$R_L = 1M\Omega$, $C_L = 20pF$	0.7	MHz
Vn	Equivalent Input Noise Voltage	$R_S = 100\Omega$, $V_I = 0V$, $f = 1kHz$	40	$nV/\sqrt{Hz}$

LM2904Q/LM2904AQ

Symbol	Parameter	Conditions	Typ	Unit
SR	Slew Rate at Unity Gain	$R_L = 1M\Omega$, $C_L = 30pF$, $V_I = \pm 10V$	0.3	$V/\mu s$
B1	Unity Gain Bandwidth	$R_L = 1M\Omega$, $C_L = 20pF$	0.7	MHz
Vn	Equivalent Input Noise Voltage	$R_S = 100\Omega$, $V_I = 0V$, $f = 1kHz$	40	$nV/\sqrt{Hz}$

- Notes:
- Typical values are all at $T_A = +25^\circ C$ conditions and represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.
 - All limits are guaranteed by testing or statistical analysis. Limits over the full temperature ($-40 \leq T_A \leq +125^\circ C$) are guaranteed by design, but not tested in production.



Application Information

General Information

The LM2902Q/LM2902AQ/LM2904Q/LM2904AQ series op amps which operate with only a single power supply voltage, have true-differential inputs and remain in the linear mode with an input common-mode voltage of 0V. These amplifiers operate over a wide range of power supply voltage with little change in performance characteristics. At +25°C, amplifier operation is possible down to a minimum supply voltage of 2.3V.

Precautions should be taken to ensure that the power supply for the integrated circuit never becomes reversed in polarity, or that the unit is not inadvertently installed backwards in a test socket. If precaution is not taken, an unlimited current surge through the resulting forward diode within the IC may occur and could cause fusing of the internal conductors, destroying the unit.

Large differential input voltages can be easily accommodated and, as input differential voltage protection diodes are not needed, no large input currents result from large differential input voltages. The differential input voltage may be larger than V_+ without damaging the device. Protection should be provided to prevent the input voltages from becoming negative more than -0.3V (@ +25°C). An input clamp diode with a resistor to the IC input terminal can be used.

To reduce the power supply current drain, the amplifiers have a class A output stage for small signal levels which converts to class B in a large signal mode. This allows the amplifiers to achieve both source and sink large output currents. Therefore both NPN and PNP external current boost transistors can be used to extend the power capability of the basic amplifiers. The output voltage needs to raise approximately 1 diode drop above ground to bias the on-chip vertical PNP transistor for output current sinking applications.

For AC applications where the load is capacitive coupled to the output of the amplifier, a resistor should be used from the output of the amplifier to ground to increase the class A bias current, and prevent crossover distortion. Where the load is directly coupled, as in DC applications, there is no crossover distortion.

Capacitive loads which are applied directly to the output of the amplifier reduce the loop stability margin. Values of 50pF can be accommodated using the worst-case non-inverting unity gain connection. Large closed loop gains or resistive isolation should be used if larger load capacitance must be driven by the amplifier.

The bias network of the LM2902Q/LM2902AQ/LM2904Q/LM2904AQ series establishes a quiescent current which is independent of the magnitude of the power supply voltage over the range of 3V to 30V.

Output short circuits either to ground or to the positive power supply should be of short time duration. Units can be destroyed, not as a result of the short-circuit current causing metal fusing, but rather due to the large increase in IC chip dissipation which will cause eventual failure due to excessive function temperatures. Putting direct short-circuits on more than one amplifier at a time will increase the total IC power dissipation to destructive levels, if not properly protected with external dissipation limiting resistors in series with the output leads of the amplifiers. The larger value of output source current which is available at +25°C provides a larger output current capability at elevated temperatures (see *Typical Performance Characteristics*) than a standard IC op amp.

The circuits presented in *Typical Applications Circuit* section emphasize operation on a single power supply voltage. If complementary power supplies are available, all of the standard op amp circuits can be used. In general, introducing a pseudo-ground (a bias voltage reference of $V_{CC}/2$) will allow operation above and below this value in single power supply systems. Many application circuits are shown which take advantage of the wide input common-mode voltage range which includes ground. In most cases, input biasing is not required and input voltages which range to ground can easily be accommodated.




Application Information (continued)

Power Supply Bypassing and Layout

The LM2902Q/LM2902AQ/LM2904Q/LM2904AQ family operates from both single supply voltage ranging 3V to 36V, or dual supply voltage $\pm 1.5V$ to $\pm 18V$.

As with any operation amplifier, proper supply bypassing is critical for low-noise performance and high power supply rejection. For single-supply operation system, a minimum $0.1\mu F$ bypass capacitor should be recommended to place as close as possible between V_{CC} pin and GND. For dual-supply operation, both the positive supply pin and negative supply pin should be bypassed to ground with a separate $0.1\mu F$ ceramic capacitor.

$2.2\mu F$ tantalum capacitor can be added for better performance. Keep the length of leads and traces that connect capacitors between LM2902Q/LM2902AQ/LM2904Q/LM2904AQ power supply pin and ground as short as possible.

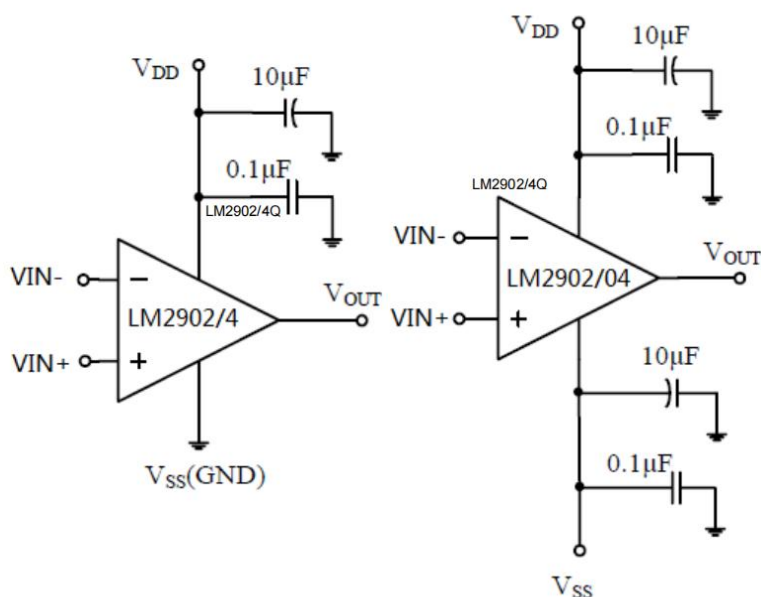

Amplifier with Bypass Capacitors





ORDERING INFORMATION


Order Number	Package	Package Quantity	Marking On The park
LM2902QT14-13-TUDI	TSSOP-14	Tape,Reel,2500	L2902-Q
LM2902AQT14-13-TUDI	TSSOP-14	Tape,Reel,2500	L2902AQ
LM2902QS14-13-TUDI	SOP14	Tape,Reel,2500	L2902-Q
LM2902AQS14-13-TUDI	SOP14	Tape,Reel,2500	L2902AQ
LM2904QS-13-TUDI	SOP8	Tape,Reel,2500	L2904-Q
LM2904AQS-13-TUDI	SOP8	Tape,Reel,2500	L2904AQ
LM2904QTH-13-TUDI	TSSOP-8	Tape,Reel,2500	L2904-Q
LM2904AQTH-13-TUDI	TSSOP-8	Tape,Reel,2500	L2904AQ
LM2904QM8-13-TUDI	MSOP-8	Tape,Reel,2500	L2904-Q
LM2904AQM8-13-TUDI	MSOP-8	Tape,Reel,2500	L2904AQ







Package SOP8

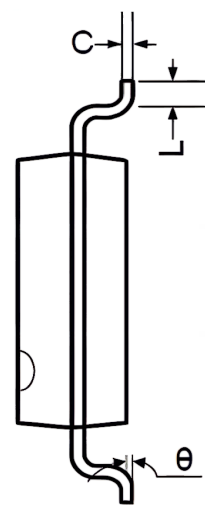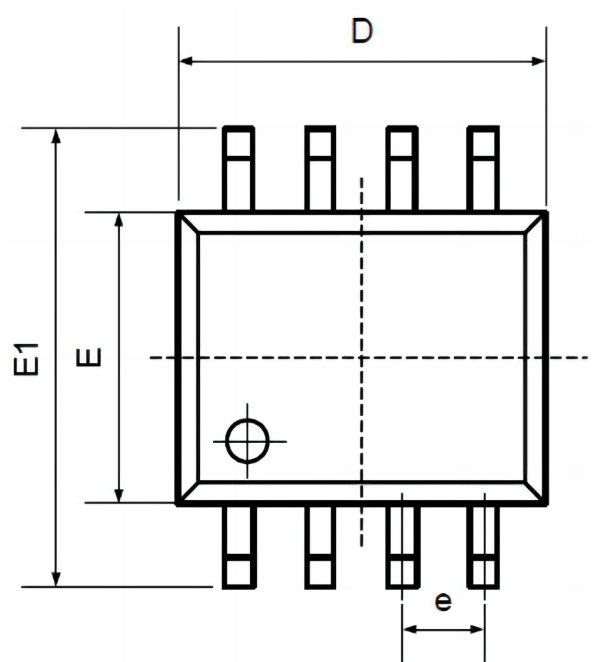

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
B	0.330	0.510	0.013	0.020
C	0.190	0.250	0.007	0.010
D	4.780	5.000	0.188	0.197
E	3.800	4.000	0.150	0.157
E1	5.800	6.300	0.228	0.248
e	1.270TYP		0.050TYP	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

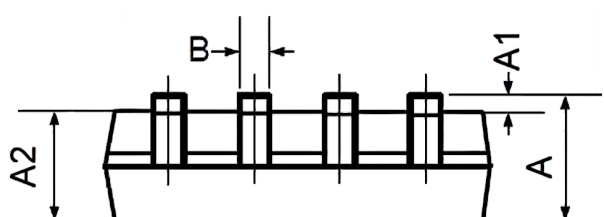


Package SOP14

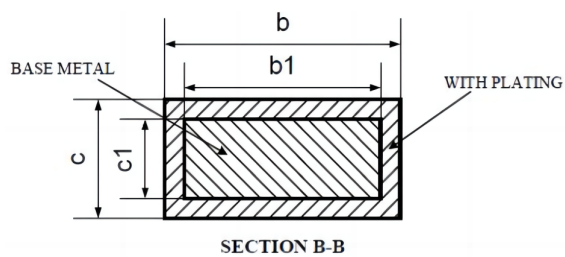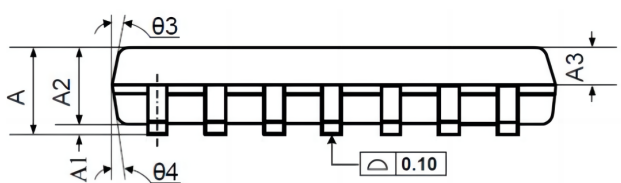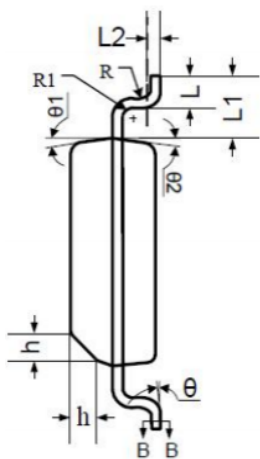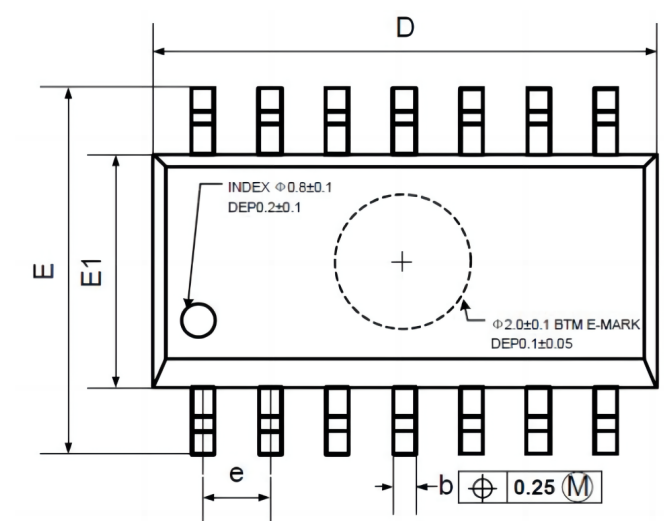

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	1.35	1.60	1.75
A1	0.10	0.15	0.25
A2	1.25	1.45	1.65
A3	0.55	0.65	0.75
b	0.36		0.49
b1	0.35	0.40	0.45
C	0.16		0.25
c1	0.15	0.20	0.25
D	8.53	8.63	8.73
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27 BSC		
L	0.45	0.60	0.80
L1	1.04 REF		
L2	0.25 BSC		
R	0.07		
R1	0.07		
h	0.30	0.40	0.50
θ	0°		8°
θ1	6°	8°	10°
θ2	6°	8°	10°
θ3	5°	7°	9°
θ4	5°	7°	9°




Package TSSOP14

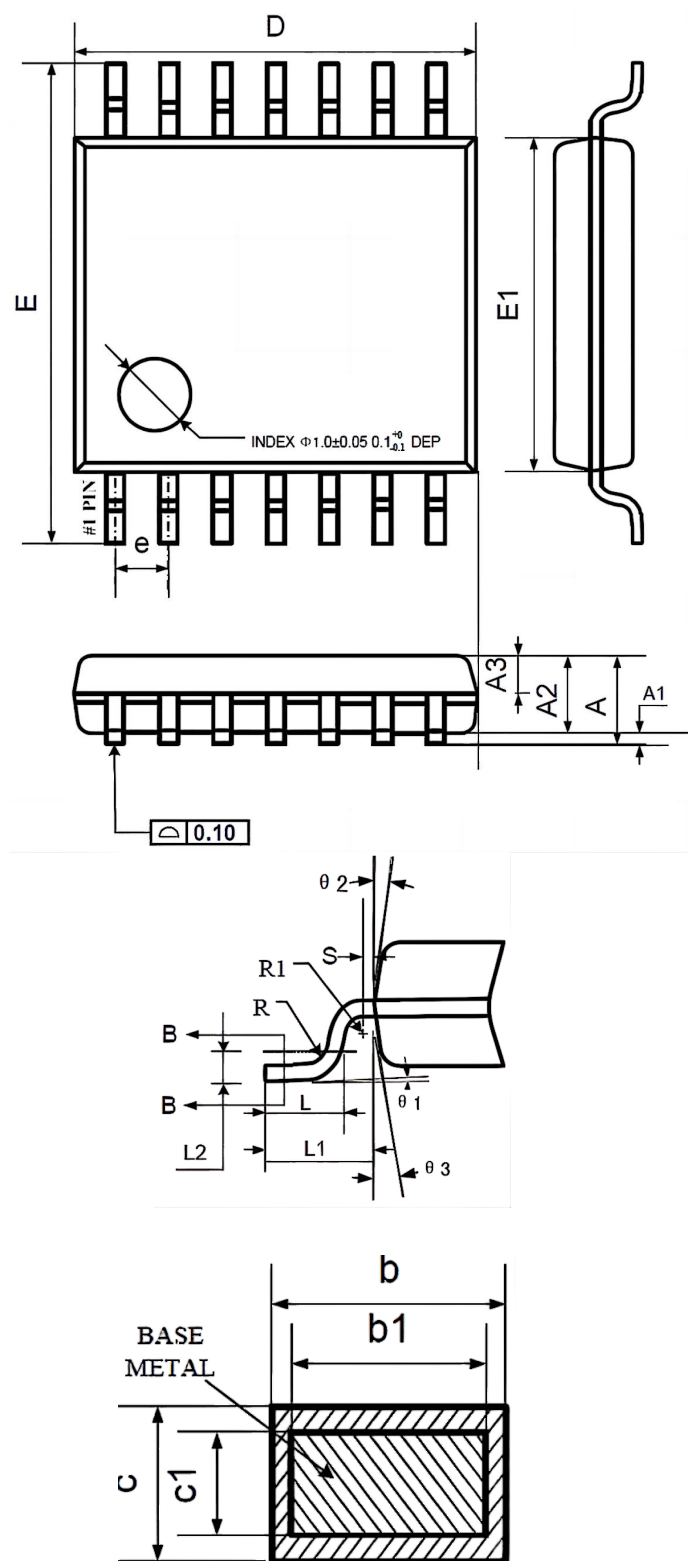

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	—	—	1.20
A1	0.05	—	0.15
A2	0.90	1.00	1.05
A3	0.34	0.44	0.54
b	0.20	—	0.28
b1	0.20	0.22	0.24
C	0.10	—	0.19
c1	0.10	0.13	0.15
D	4.86	4.96	5.06
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e	0.65 BSC		
L	0.45	0.60	0.75
L1	1.00 REF		
L2	0.25 BSC		
R	0.09	—	—
R1	0.09	—	—
S	0.20	—	—
$\theta 1$	0°	—	8°
$\theta 2$	10°	12°	14°
$\theta 3$	10°	12°	14°






Package MSOP8

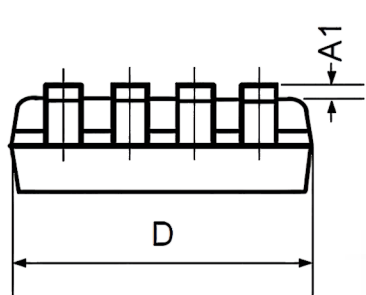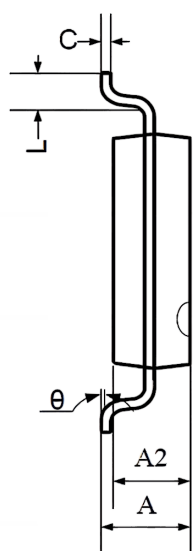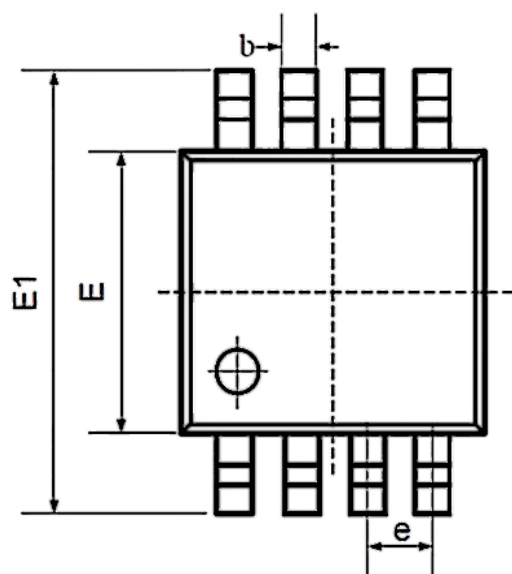

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.200	0.031	0.047
A1	0.000	0.200	0.000	0.008
A2	0.760	0.970	0.030	0.038
b	0.30 TYP		0.012 TYP	
C	0.15 TYP		0.006 TYP	
D	2.900	3.100	0.114	0.122
e	0.65 TYP		0.026 TYP	
E	2.900	3.100	0.114	0.122
E1	4.700	5.100	0.185	0.201
L	0.410	0.650	0.016	0.026
θ	0°	6°	0°	6°

Package TSSOP8

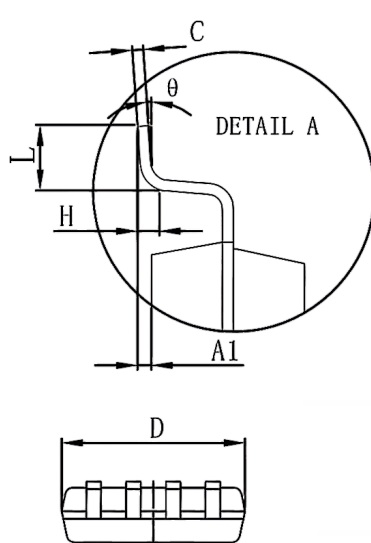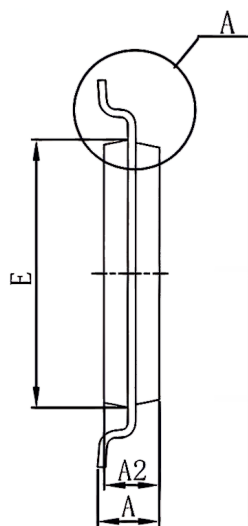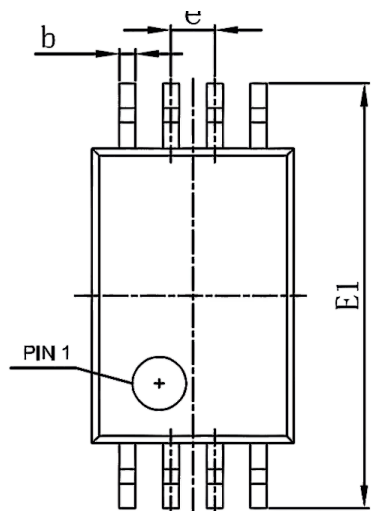

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
D	2.900	3.100	0.114	0.122
E	4.300	4.500	0.169	0.177
b	0.190	0.300	0.007	0.012
C	0.090	0.200	0.004	0.008
E1	6.250	6.550	0.246	0.258
A		1.200		0.047
A2	0.800	1.000	0.031	0.039
A1	0.050	0.150	0.002	0.006
e	0.65(BSC)		0.026(BSC)	
L	0.500	0.700	0.020	0.028
H	0.25(TYP)		0.01(TYP)	
θ	1°		1°	



Important statement:

- TUDI Semiconductor reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using TUDI Semiconductor products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- TUDI Semiconductor products have not been licensed for life support, military, and aerospace applications, and therefore TUDI Semiconductor is not responsible for any consequences arising from the use of this product in these areas.
- If any or all TUDI Semiconductor products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all TUDI Semiconductor products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- TUDI Semiconductor documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. TUDI Semiconductor assumes no responsibility or liability for altered documents.
- TUDI Semiconductor is committed to becoming the preferred semiconductor brand for customers, and TUDI Semiconductor will strive to provide customers with better performance and better quality products.