


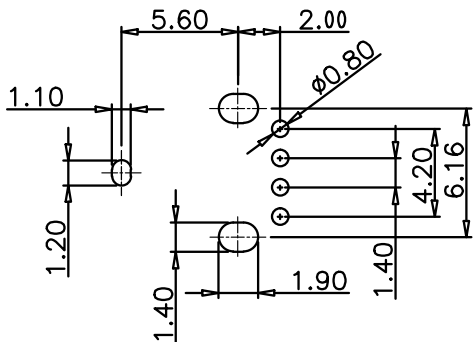
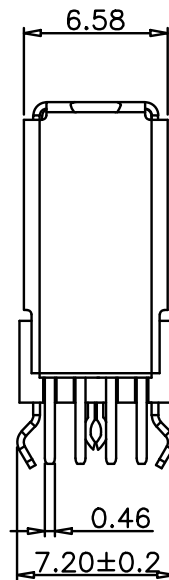



RoHS

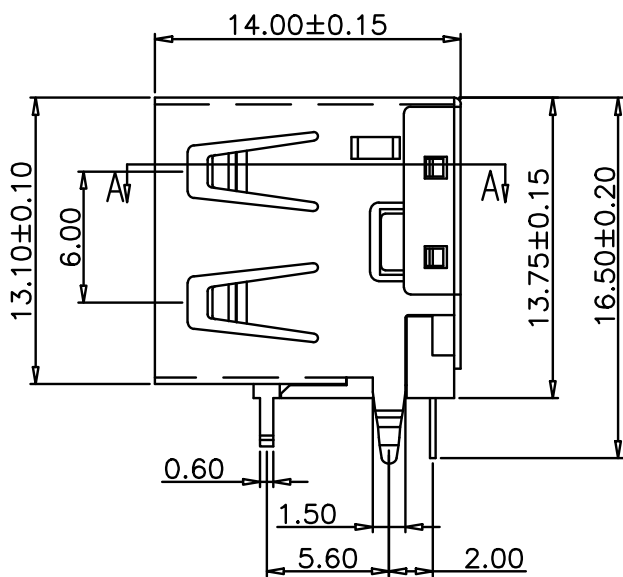

SECTION A-A

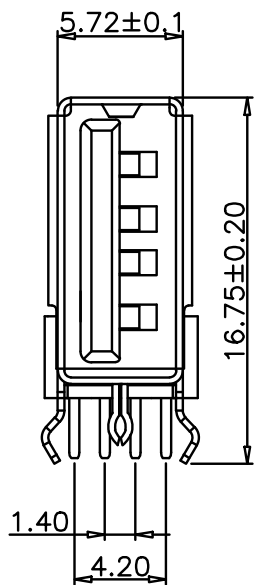

PCB LAYOUT
(BOTTOM VIEW)

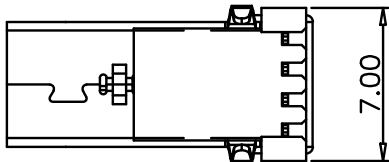

规格说明:Specifications: 电气特
性:Electrical: 1. 额定电流:
Current Rating

1. 5A/contact terminal
2. 额定电压: Voltage Rating

30V DC 3. 接触阻
抗:Contact Resistance

30 milliohms MAX 4. 耐电压:Dielectnic
Withstanding Voitage:

500 V AC AT Sea Levol 5.
绝缘阻抗:Lnsulation Resistance:

1000MEGA ohms MIN 物理性
能:Mechanical: 1. 插拔力: Cnnector Mate and
Unmate Force

Mate force:3. 57kgf (MAX)
Unmate force:1. 02kgf (MIN) 2.
端子保持力: Terminal Retenion
1. 2kgf (MIN)

原材料:Matorial:

1. 塑胶:Housing:

Hing Temperature Thermaplastics,
U1 94V-0 LCP/PBT White/Black 2. 端
子:Contact:Copper Alloy C2680 3. 外壳:Shell: Copper
Alloy C2680/SPCC 电镀:Finish: 1. 端子:Contact:
Piated Gold in Mating Area;

Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

TOLERANCE UNLESS OTHERWISE SPEC		SHENZHEN FUGANG TECHNOLOGY CO.,LTD						
BASIC DIMENSION	TOLERANCE	DSND	LQHX	26.06.15	TITLE:USB SOCKET			
x.x	±0.30	CHKD	Z F C	26.06.15	PART NO:FG-ST-001-13A			
x.xx	±0.20	APVD	L P J	26.06.15				
x.xxx	±0.10							
ANGLES	±3°			UNIT:mm		SCALE:1:1	SIZE:A4	SHEET:1/1