

Pitch: 1.27mm(0.05" ) 0.40 SQ Pin  
Pin Header Single Row Right Angle Type

**ELETE**  
Professional Connecting Solutions  
HMISRXX Series




**Specifications**

Current Rating: 1.0 Ampere  
Insulation Resistance: 1000MΩ Min  
Dielectric Withstanding: 300V AC  
Contact Resistance: 20mΩ Max  
Operating Temperature: -40°C to +105°C

**Materials**

Contact Material: Brass  
Insulation Material: Polyester, UL 94V-0  
LCP/NL6T

All material RoHS&Reach Compliant  
Halogen-free is available

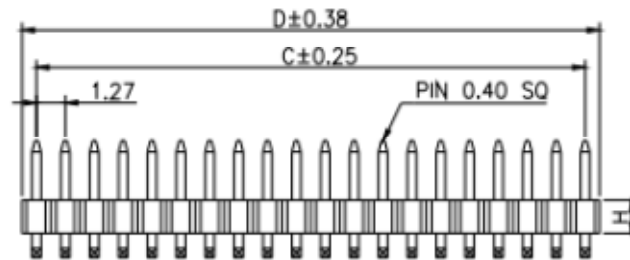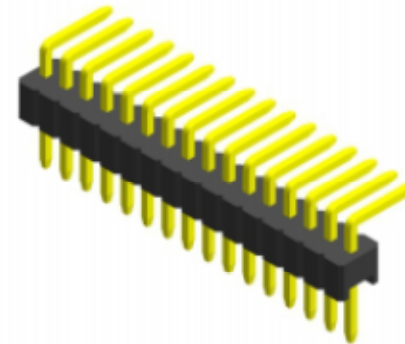

Mating with



HFIS543




HFISR43



HFISN43

Recommended  
P.C.Board  
Hole Layout



No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	1.27	2.54	10	11.43	12.70	18	21.59	22.86	26	31.75	33.02
03	2.54	3.81	11	12.70	13.97	19	22.86	24.13	27	33.02	34.29
04	3.81	5.08	12	13.97	15.24	20	24.13	25.40	28	34.29	35.56
05	5.08	6.35	13	15.24	16.51	21	25.40	26.67	29	35.56	36.83
06	6.35	7.62	14	16.51	17.78	22	26.67	27.94	30	36.83	38.10
07	7.62	8.89	15	17.78	19.05	23	27.94	29.21	31	38.10	39.37
08	8.89	10.16	16	19.05	20.32	24	29.21	30.48	32	39.37	40.64
09	10.16	11.43	17	20.32	21.59	25	30.48	31.75	33	40.64	41.91