
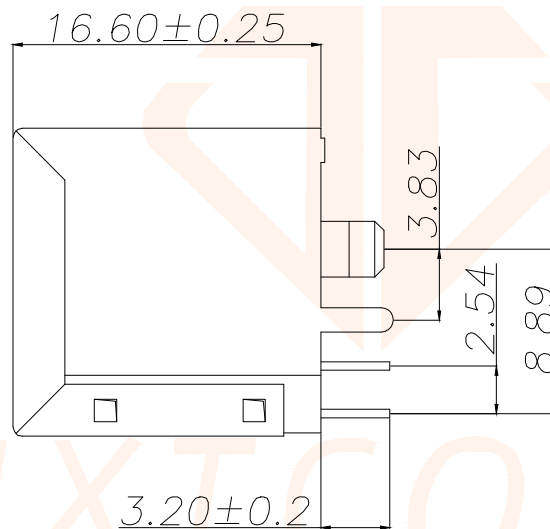


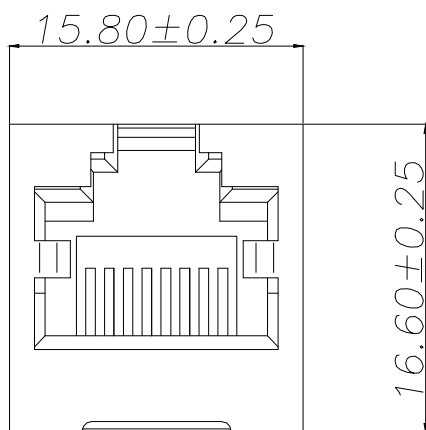

NOTES

MATERIAL

- 1.HOUSING MATERIAL: PBT BLACK UL94V-0.
- 2.CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- 3.PLATING: GOLD FLASH PLATING .
- 4.SHELL: BRASS T=0.2mm NI PLATING.

ELECTRICAL


- 1.VOLTAGE RATING: 125 VAC RMS.
- 2.CURRENT RATING: 1.5 AMP.
- 3.CONTACT RESISTANCE: 40 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE: 500 MEGOHMS MIN @ 100V DC .
- 5.DIELECTRIC DIELECTRIC RESISTANCE: 500V DC RMS 50Hz. 1MIN.

MECHANICAL

- 1.DURRABILITY: 750 CYCLES MIN.
2. MATING/UNMATING FORCE : 2.24 KG.F MAX.


ENVIRONMENTAL:

- 1.STORAGE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
- 2.OPERATION: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

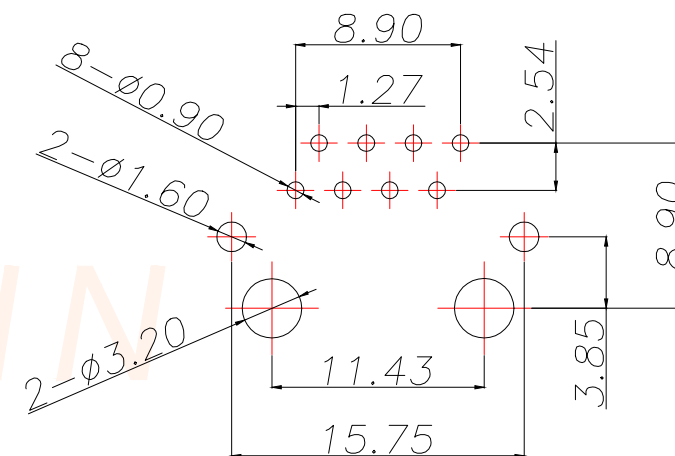

RECOMMEND PCB LAYOUT (TOP View)

T=1.60MM TOLERANCE:±0.05MM

TOLERANCE		 深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
X.:±0.20	X':±5°	PART NO. RJ45-3043-8P	TITLE: RJ45 52立式有壳无灯B3.85 DIP		
X.X:±0.15	X.X':±2°		MANUFACTURE DWG		
X.XX:±0.05	X.XX':±1°				
UNITS	mm	DESIGN:	Ethan		
MATERILA	— — —	CHED:	Olvia		
FINISH	— — —	APPD:	Ava		
				SCALE N:A	SHEET 1/1