



- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing : $\leq 20\text{m}\Omega$

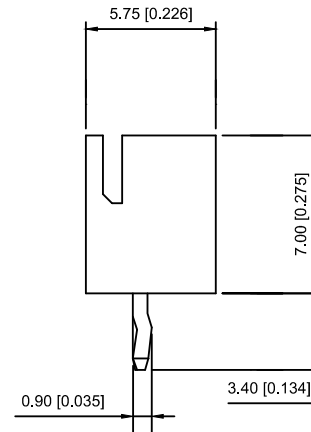

- ① Series No.
- ② Category : W-WAFER
- ③ Wedding Board Angle : V-Stright 180°
- ④ Row No.-Pin No.: XX-02P~20P
- ⑤ Piug the Pin\$ Special No.:K-KINK
- ⑥ Material : N0-PA66;46-PA46 94V-0
- ⑦ Plating Category: Sn-Bright Tin Plating

X8821WV-07K-46SN	PA46 UL 94V-0	Brass	Tin-Plated	X8821H
X8821WV-07-N0SN	Nylon 66 UL 94V-0			
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Housing

					ANGLAR	±5°	DWN		DATE		VIEW: 	2.5mm Crimp Style Connectors		
Δx					L ≤ 4	±0.2	CHKD		DATE		UNIT: mm/in	PART NO.: X8821WV-07K-N0SN		
Δx					4<L ≤ 16	±0.3			DATE			DWG NO.:		
Δx					16<L ≤ 63	±0.4			DATE			X-X8821WV-07K-N0SN		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5	APPD		DATE		SIZE: A4			
REVISIONS					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													1/1	A0