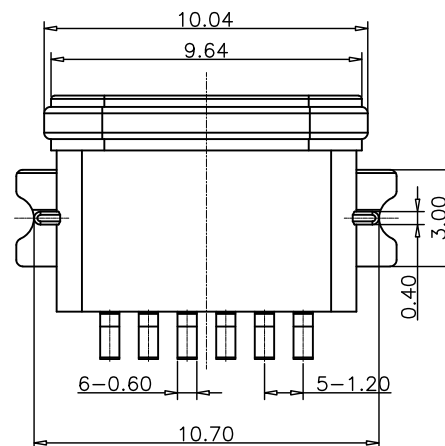
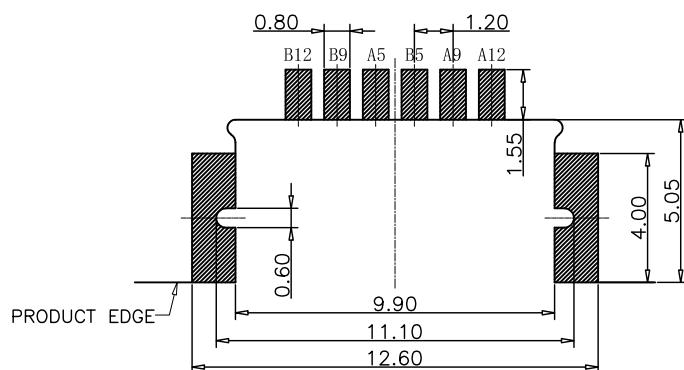
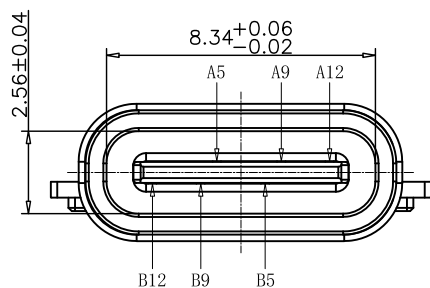
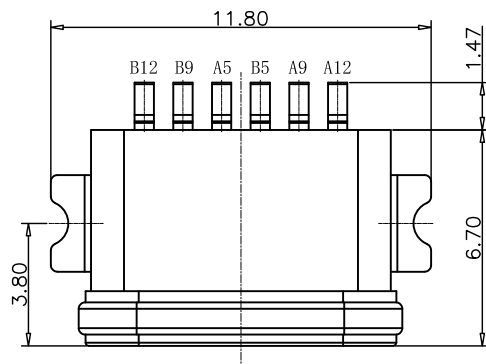


备注 (NOTE):

1. 电气特性:

1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA 下测量.
1. 2. 接触电流: 3A VBUS引脚; 1. 25A用于GND引脚; 其他引脚为0. 25A.

1. 3. 额定电压: 5V.

1. 4. 耐电压: 100VAC.

1. 5. 绝缘电阻: 至少100兆欧 .

2. 机械性能:

3. 1. 插入力: 0. 5-2. 0Kg

3. 2. 拔出力: 0. 6-2. 04Kg

3. 3. 插拔次数: 10000次.

4. 工作环境: -20℃ to +85℃.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	ZINC ALLOY, NI PLATED
2	CONTACT	6	COPPER STEEL, TIN/Au/NI PLATED
3	1MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
4	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X.' ±2" X.X' ±0.5"

UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY :

马跃

DATE :

2014-02-23

APPROVED BY :

邱敏

DATE :

2014-02-23

PART NAME:

USB TYPE C 防水母座6P SMT沉板0.8

PART NO.

HYCW373-USBC06-080B

MOLD NO.

DRAW NO:

HYC-2207021716

SHEET NO.

1 OF 1