
CPM121

Consensic

Data Sheet

Digital Barometer

Rev1.1
Dec 2024
DAT-0050

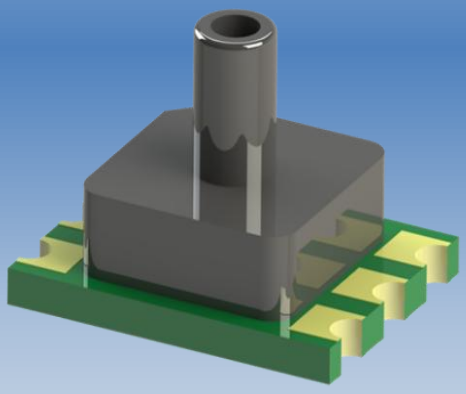

CPM121

Digital Barometer

Overview

The CPM121 system-in-a-package (SIP) solution comprises of aresistive bridge type pressure sensor and a 24-bit ADC for high resolution and accurate pressure measurements. The fully calibrated pressure and temperature compensated digital output makes the CPM121 solution simple to use.The CPM121 includes internal calibration logic that provides accurate pressure and temperature measurements to the application via the I²C interface.There is no need to separately download internal calibration coefficients and have the host microcontroller perform complicated compensation calculations.

Applications

- Smartphones
- Wearables
- Altimeters
- Portable and Stationary Barometers
- Weather Stations
- GPS Applications
- Hard Disk Drives(HDD)
- Industrial Equipment
- Air Control Systems
- Vacuum Systems

Benefits

- Low Power Consumption
- Excellent for Battery Applications
- External Clock not Required
- High Resistance to Sensing Media

Features

- Factory Calibrated Pressure and Temperature Sensor
- Supply Voltage: 2V to 5.5V(3V @typical)
- Average Current Consumption: <5uA (One Measurement)
- Sleep State Current Consumption: <200nA (25°C)
- Operating Temperature Range: -40°C to +85°C
- Pressure Absolute Accuracy: ±0.1kPa (±1.0mbar), 95kPa to 105kPa@ 0°Cto 50°C
- Temperature Accuracy: ±1.0°C

Interfaces

- I²C (up to 400kHz)

Physical Characteristics

- Small Form Factor, 10x 13 x7.5mm (w x l x h)
- LGA Package, 6 Lead
- Top Side Sensing Port

RoHS Compliant

©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

CPM121 BLOCK DIAGRAM

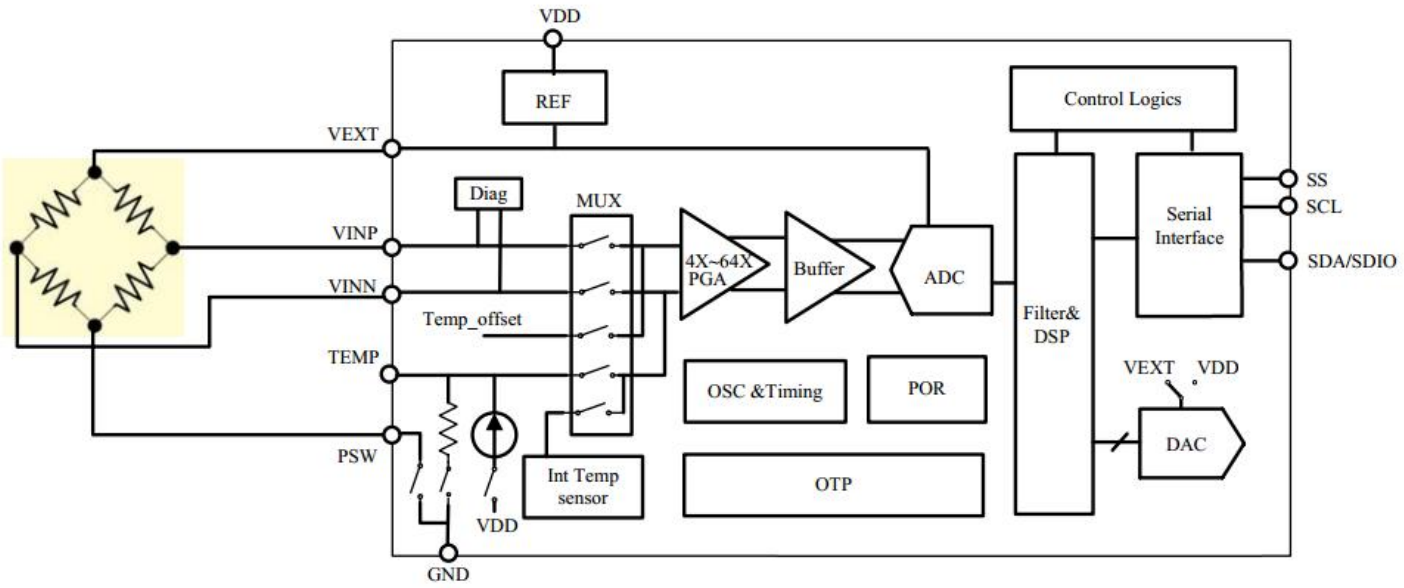


TABLE1: ORDERING INFORMATION

PART NUMBER	OUTPUT MODE	OPERATION MODE	PACKAGE
CPM121	I^2C	Sleep	6-Lead LGA, PCB Substrate

SALES and CONTACT INFORMATION sales@consensic.com
www.consensic.com

United States
Consensic, Inc.
1900 Powell Street,Suite 600
Emeryville California,
94608, USA
Ph: +1 510.588.8735

China
Wuxi Consensic Electronics Co., Ltd.
No.86,Dicui Road,B5 Building,
Fourth Floor,Room 401,
Wuxi, Jiangsu Province, 214072
Ph: +86 510.85122279
Fax: +86 510.85122259

无锡康森斯克电子科技有限公司
无锡市滨湖区滴翠路 86 号太湖智谷科技园
北门 B5 栋 4 楼 401 室
邮编:214072
电话: +86 510.85122279
传真: +86 510.85122259

©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

CONTENTS

1 OPERATING CHARACTERISTICS 6
1.1 ABSOLUTE RATINGS 6
1.2 OPERATING CONDITIONS 6
1.3 ELECTRICAL PARAMETERS 7
2 OPERATION MODES 7
3 OUTPUT MODES 7
3.1 I^2C 7
3.2 I^2C COMMANDS 8
3.3 I^2C GET DATA (GD) 8
3.4 I^2C MEASUREMENT REQUEST (MR) 10
4 CALCULATING OUTPUT 11
4.1 PRESSURE OUTPUT 11
4.2 TEMPERATURE OUTPUT 11
5 PACKAGE AND ASSEMBLY 12
5.1 PIN ASSEMBLY AND MECHANICAL DRAWING 12
5.2 SOLDERING CONDITIONS 13
6 APPLICATION DIAGRAM 13
7 DOCUMENT HISTORY 14
8 DISCLAIMER 14

©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

LIST OF TABLES

TABLE 1: ORDERING INFORMATION 3
TABLE 2: I²C COMMANDS 8
TABLE2: CPM121 PIN DESCRIPTION 12

LIST OF FIGURES

FIGURE 1: SLAVE ADDRESS FOLLOWED BY THREE PRESSURE AND TWO TEMPERATURE BYTES 9
FIGURE 2: 7-BIT SLAVE ADDRESS FOLLOWED BY THREE PRESSURE BYTES 9
FIGURE 3: I²C MEASUREMENT REQUEST COMMAND 10

©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

1 OPERATING CHARACTERISTICS

1.1 ABSOLUTE RATINGS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Over Pressure					2X FS	kPa (bar)
Supply Voltage (with respect to GND)	V_{DD}		-0.3		6.5	V
Voltages at Analog and Digital I/O Pins	V_{A_IO} V_{D_IO}		-0.3		V_{DD} +0.3	V
Storage Temperature	T_{STOR}		-60		150	°C

1.2 OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
PRESSURE RANGE CHARACTERISTICS						
Range			30 (300)		120 (1200)	kPa (mbar)
Accuracy		30 to 120kPa (-20°C to 0°C)	-0.2 (-2.0)	±0.17 (±1.7)	+0.2 (+2.0)	kPa (mbar)
		30 to 120kPa (0°C to 65°C)	-0.15 (-1.5)	±0.10 (±1.0)	+0.12 (+1.2)	kPa (mbar)
Solder Drifts			-0.1 (-1.0)		+0.2 (+2.0)	kPa (mbar)
Resolution[1]				0.17		Pa
Noise in Pressure		Full Bandwidth, Normal Mode Altitude Based on Relative Pressure		1 10		Pa cm
TEMPERATURE SENSOR						
Range			-40		85	°C
Resolution				0.003		°C
Accuracy		-40°C to 85°C	-1	±0.75	+1	°C
OPERATION						
Supply Voltage to GND[2]	V_{SUPPLY}		2	3.0	5.5	V
Operating Temperature Range			-40		85	°C
I^2C Pull-Up Resistors	R_{PU}		1	2.2		kΩ

[1]Guaranteed by design of 24bits ADC, and calculated according to the range in application.
[2] Factory calibrated for Pressure and Temperature at 3.0V±10%. Output accuracy will be affected if used outside this range. Other ranges available upon request.

©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

1.3 ELECTRICAL PARAMETERS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
SUPPLY CURRENT						
Supply Current, average[1] during conversion[2] standby(no conversion)	 Iavg Isc Iss	VDD=3V		 3.95 1.5	 0.2	 µA mA µA
ANALOG TO DIGITAL CONVERTER						
Resolution	r_{ADC}				24	Bit
I^2C Clock Frequency	$F_{C,I2C}$				400	kHz

[1]Under the assumption of one conversion every second. Conversion means either a pressure or a temperature measurement
[2]During conversion, the sensor will be switched on to VDD, and after conversion ended, the sensor will automatically be switched off from VDD.

2 OPERATION MODES

The CPM121 is factory programmed to Sleep Mode. In this mode, the CPM121 remains asleep until the master/host sends a measurement request (MR) before taking sensor measurements. After the CPM121 receives anMR command, it wakes up, runs a full measurementcycle, stores the measurement data in internal registers and then returns to sleep mode again.

3 OUTPUT MODES

3.1 I^2C

Two-wire I^2CI are available for reading sensor measurement data from the CPS121. The interface is selectable by setting the digital voltage level on the SS pin:

- SS = 1 or float→ I^2C Mode

When SS=1 or not connected (internal pull-up at SS pin), I^2C mode is selected.

The factory setting for the I^2C slave address is 0x6C and the communication is restricted to this address only.

- I^2C Address = 0x6C

©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

3.2 I²C COMMANDS

Table 2 details the commands to interface with the device in the I²C modes.

TABLE 2: I²C COMMANDS

TYPE	DESCRIPTION	SUPPORT
Measurement Request (MR)	Wakes up the CPM121, performs a sensor measurement, stores the sensor measurement data in internal registers and returns to sleep	I²C
Get Data (GD)	Retrieves the sensor measurement data from the internal CPM121 registers*.	I²C

**Note: GD does not initiate a new measurement. Repeated GD commands will return the same (or stale) sensor measurement data. An MR is required to perform a full sensor measurement cycle to refresh the sensor register data.*

The Get Data (GD) command is used to read out data from the CPM121. With the start of communication (for I²C after reading the slave address;) the entire sensor measurement output packet will be loaded in a serial output register. The register will be updated after the communication is finished. The output is always scaled to 24-bits.

The ordering of the bits is “big-endian”.

3.3 I²C GET DATA (GD)

An I²C Get Data command starts with the 7-bit slave address and the 8th bit = 1 (READ). The device then sends acknowledge (ACK), indicating I²C communication success. The number of data bytes returned by the device is determined by the master, which controls NACK and stop conditions.


Figure 1 displays and example forsending three bytes followed by readingfive bytes. The first byte contains the I²C address followed byinternal register address(0x06). Then theI²C address is repeated,followed by the slave sending out three pressure bytes and two temperature bytes.

The GD command is used to retrieve the pressure and temperature sensor data after anMR command has been executed.

Note that the two temperature byte codes are formatted in 2’s complement.


©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

FIGURE 1: SLAVE ADDRESS FOLLOWED BY THREE PRESSURE AND TWO TEMPERATURE BYTES

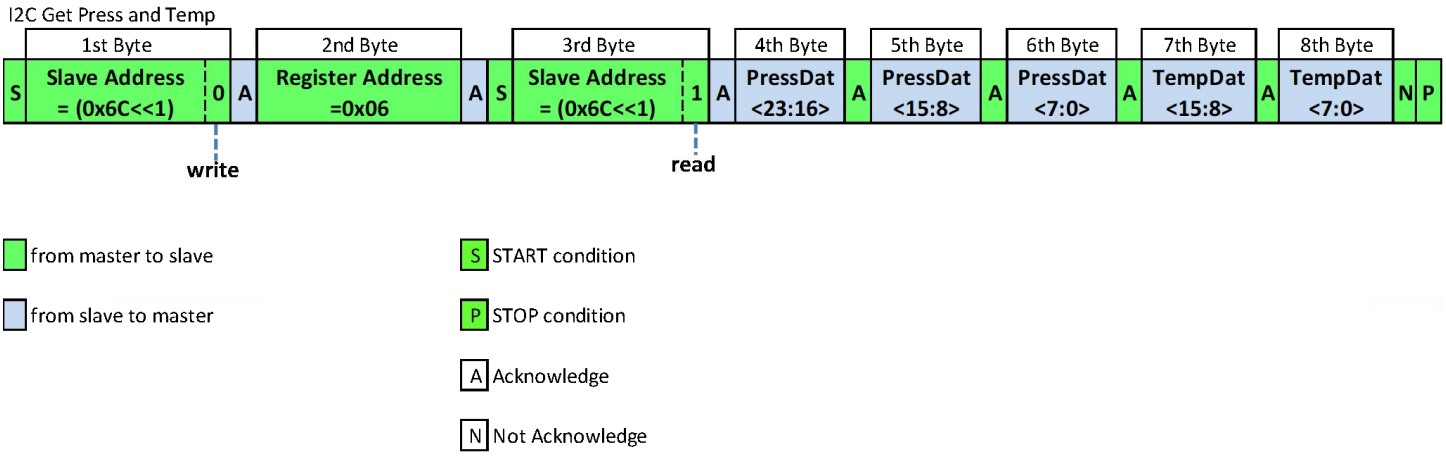

For Pressure data only, the data stream can be terminated after thesixthpressure byte. See Figure 2below.

FIGURE 2: 7-BIT SLAVE ADDRESS FOLLOWED BY THREE PRESSURE BYTES

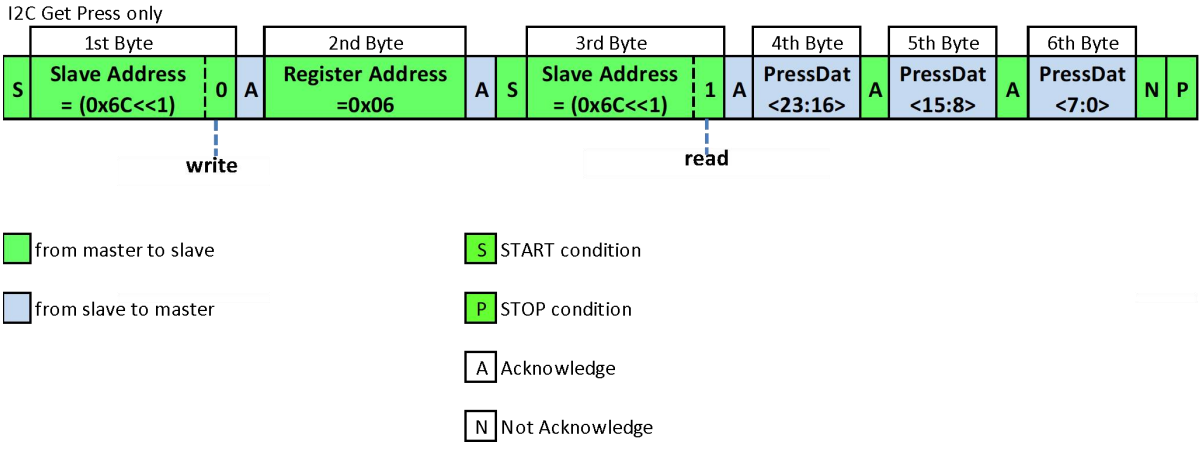


©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

3.4 I²C MEASUREMENT REQUEST (MR)

The I²C MR is used to wake up the device from Sleep Mode and start a complete sensor measurement cycle, before the device returns to Sleep Mode again. The measurement cycles starts with apressure measurement followed by a temperature measurement. The sensor measurements are digitized and run through an onboard compensation algorithm before the final measurement values are written to the digital output register. As shown in Figure 3, the communication requires the slave address (0x6C) and a WRITE bit (0) to initiate the MR. This is followed by two bytes; register address (0x30) and measurement (0xA). After the CPM121 responds with the slave ACK, the master terminates the communication with a stop condition.

Sensor measurement conversion time takes approximately 5ms, so MRs should not be sent faster than every 5ms.

FIGURE 3: I²C MEASUREMENT REQUEST COMMAND

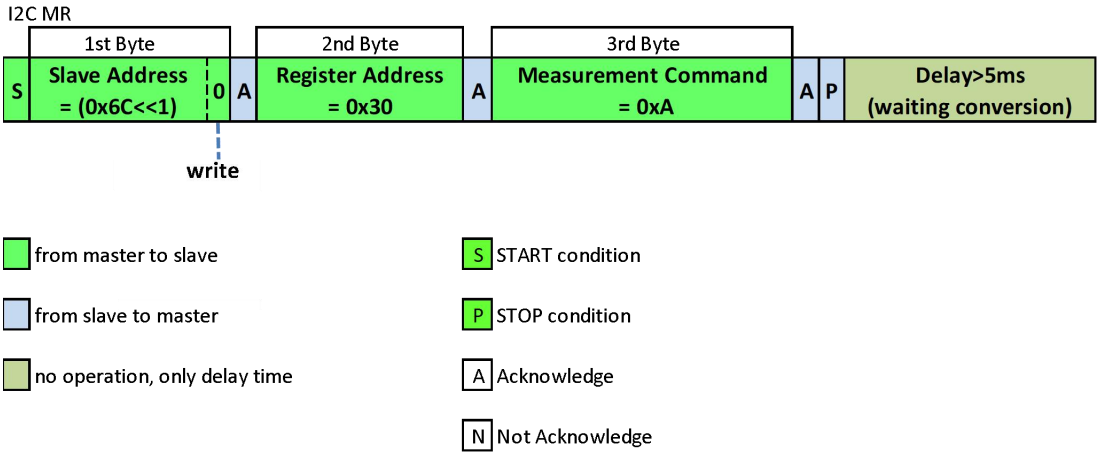

©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

4 CALCULATING OUTPUT

After retrieving the data, the compensated output can be scaledto real world values by following the equations below.

4.1 PRESSURE OUTPUT

An example of the 24-bit compensated pressure with a full scale range can be calculated as follows:

Pressure [kPa] = (Pressure 3rd Byte [23:16] x 65536+Pressure 2nd Byte [15:8] x 256 + Pressure1st Byte [7:0]) / 2^6/1000

4.2 TEMPERATURE OUTPUT

The 16-bit compensated temperature can be calculated as follows:

Positive Temperature [°C] = (Temperature High Byte [15:8] x 256 + Temperature Low Byte [7:0]) / 2^8

Negative Temperature [°C] = (Temperature High Byte [15:8] x 256 + Temperature Low Byte [7:0]-65536) / 2^8

©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

5 PACKAGE AND ASSEMBLY

The CPM121 is available in an 6-pin LGA PCB Substrate package.

5.1 PIN ASSEMBLY AND MECHANICAL DRAWING

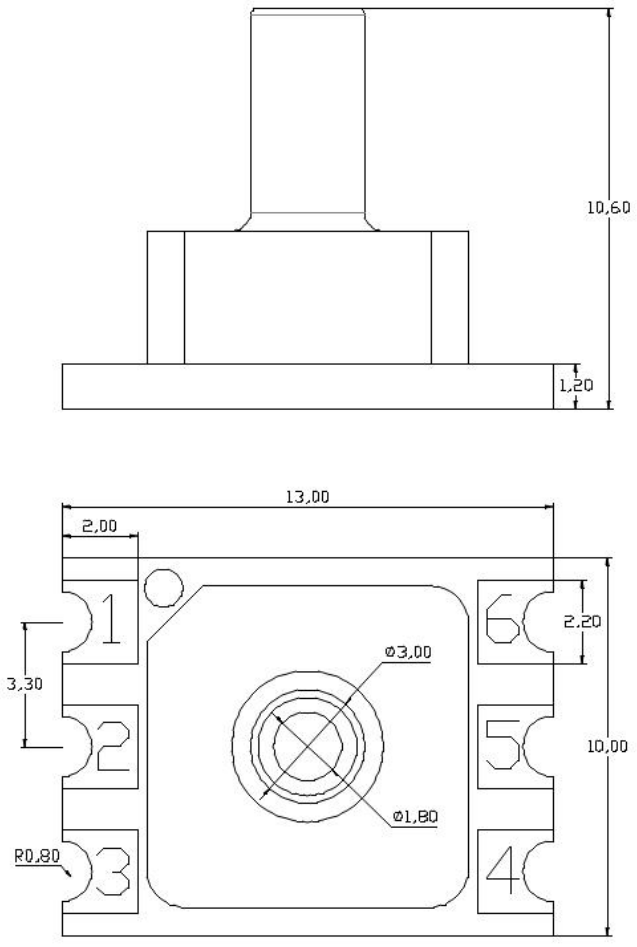


TABLE3 : CPM121 PIN DESCRIPTION

Pin	1	2	3	4	5	6
Name	NC	VDD	NC	SDA	SCL	SS


©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

5.2 SOLDERING CONDITIONS

TABLE4: PACKAGE REFLOW TEMPERATURE

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Soldering Peak Temperature	Less than 30 seconds (JEDEC-STD-020 Standard)			260	°C

6 APPLICATION DIAGRAM

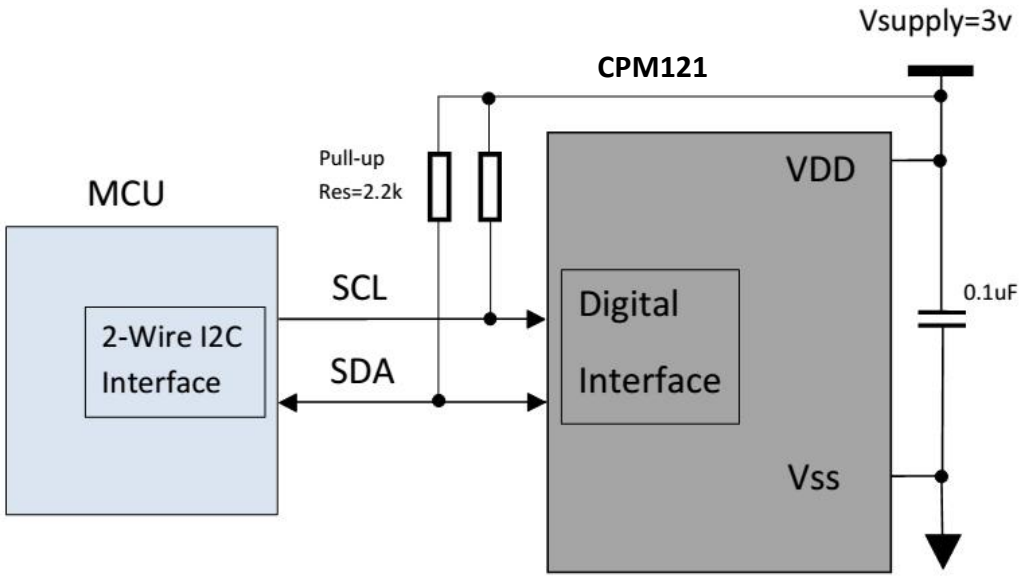

2-Wire I2C Mode

©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.

7 DOCUMENT HISTORY

REVISION	DATE	DESCRIPTION
1.0	11-Mar-2021	Preliminary Release
1.1	23-Dec-2024	Update of outline dimensions

8 DISCLAIMER

Information in this datasheet is provided solely to enable implementation and use of Consensic products. The specifications and characteristics are subject to change without notice. Consensic reserves the right to make changes without further notice to any products herein.

“Typical” parameters provided in this datasheet can and do vary in different applications and actual performance may vary over time. Customers must validate all operating parameters for their application.

Consensic is not responsible for direct, indirect, incidental or consequential damages resulting from any defect, error or failure to perform. In no event, regardless of cause, shall Consensic incur any liability for any damages of any kind, including, but not limited to, any direct, indirect, special, incidental, punitive or consequential damages arising out of, resulting from, or any way connected to the use of the product, whether arising under breach of contract, tort (including negligence), strict liability or otherwise, and whether based on this agreement or otherwise, even if advised of the possibility of such damages, and whether or not injury was sustained by persons or property or otherwise; and whether or not loss was sustained from, or arose out of, the results of, the product, or any services that may be provided by Consensic.

The customer assumes all responsibility and liability for proper and safe handling of the goods. It is the customer’s responsibility to take any and allappropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant oragency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. Consensic assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other Intellectual property rights of any kind.

©2021 Consensic, Inc. All rights reserved. The information contained in this document is subject to changes without notice.