

Pitch:2.54mm(0.1")

Pin Header Single Row S.M.T Type For LED

ELETE
—Professional Connecting Solution—
HMNST20-Series




Specifications

Current Rating:3.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:600V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials

Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

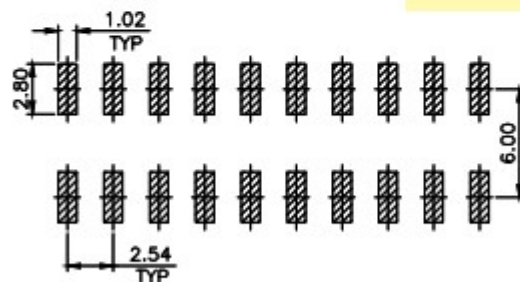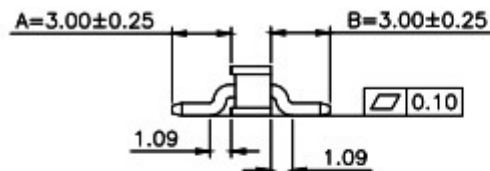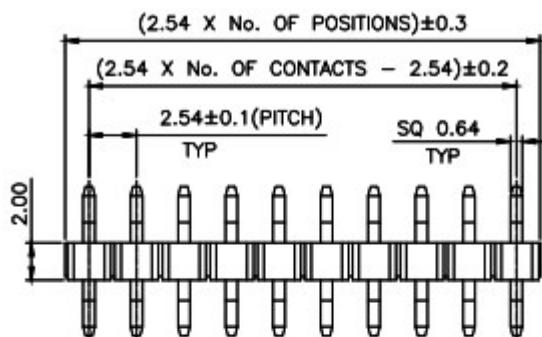

TOLERANCE: ±0.05, THICKNESS: 1.6mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)

Mating with

