


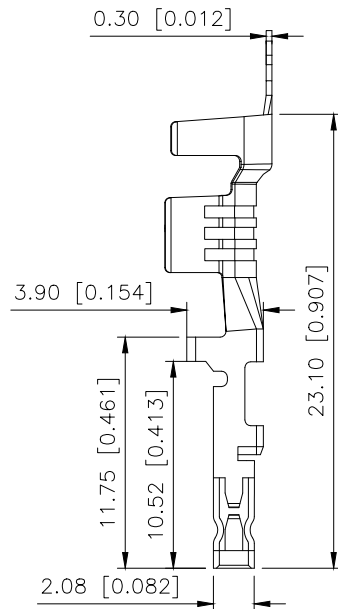


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图框升级整理图面	2025.12.20	阿树

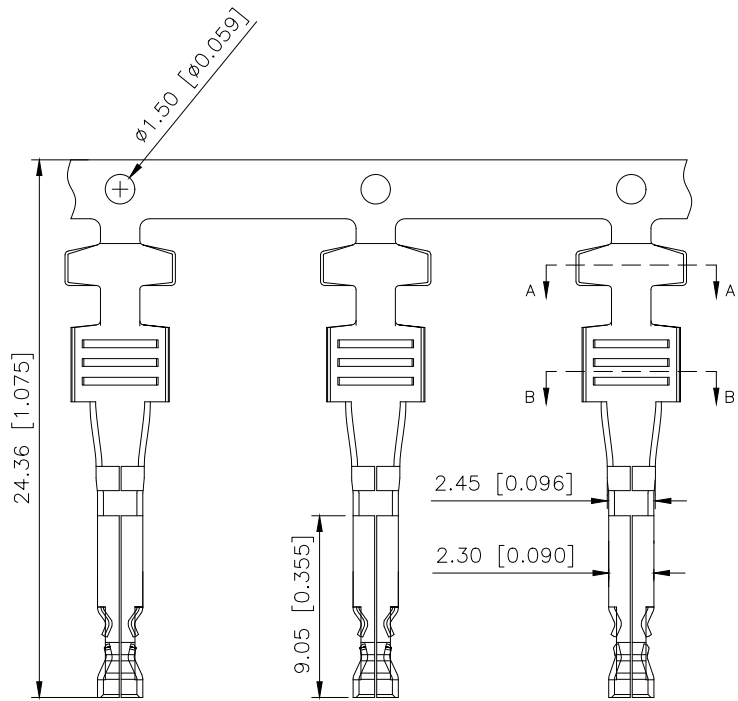

高脚12AWG

Specifications:

规格:

Voltage rating:600V AC/DC

额定电压: 600V AC/DC

Current rating:23A AC/DC

额定电流: 23A AC/DC

Withstanding voltage:2200V AC/minute

耐受电压: 2200V AC/分钟

Temperature range: -40℃+105℃

温度范围: -40℃+105℃

Insulation resistance:1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance:10mΩ Max

接触电阻: 10mΩ Max

X5701 T-B SN-H
① ② ③ ④ ⑤

1.Series No


2.Category:T-Terminal

3.Material:B-Brass



4.Plating:SN-Bright Tin Plated 50-80u'

5.Category: X-H:High Leads

X-M:Low Leads



低脚14 - 16AWG



2:1

X5701T-BSN-H	AWG#12	0.162''(4.11mm)
X5701-T-BSN-M	AWG#14	0.148''(3.75mm)
	AWG#16	0.125''(3.18mm)
PART NO	AWG	Max.Ins.Dia
	Wire size	

X5701T-BSN-H	Brass	X5701W	X5701H
PART NO	Material	Suitable XKB Wafer	Suitable XKB Housing
DESIGN	阿树	VIEW:	MODEL TYPE: 5.7mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X5701T-BSN-H
APPROVED		SIZE: A4	DWG NO.:

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1