



钜地半导体  
Tudi Semiconductor

## Product Specification

UC2842AQD8R-TUDI

CURRENT MODE PWM CONTROLLER

网址 [www.sztdbdt.com](http://www.sztdbdt.com) 🔍

**用芯智造 · 卓越品质**

**semiconductor device  
manufacturer**

- Design
- research and development
- production
- and sales



## DESCRIPTION

The UC284X A and UC384x A are fixed frequency current mode

PWM controller. Strengthen the compressive current

They are specially designed for OFF-Line and DC to DC convert er applications with a minimal external components. Internally impl emented circuits include a trimmed oscillator for precise duty cycl e control, a temper ature compensated reference, high gain error a mplifier, current nsing comparator, and a high current totem pole outp utideally suited

for driving a power MOSFET. Protection circuitry includes built un der voltage lockout and current limiting.

## Examples

## Strengthen the compressive current

The corresponding thresholds for the UC2843A/45, UC38 43/45 are 8.4V (on) and 7.6V (off).The UC2842A/43, UC3842 /43 can operate within 100% duty cycle.

The UC2842/44, UC3842/44 have UVLO thresholds of 16V (on) a nd 10V (off).


## FEATURES

- Low Start-Up and Operating Current
- High Current Totem Pole Output
- Under voltage Lockout With Hysteresis
- Operating Frequency Up To 500KHz

The UC2842/44, UC3842/44 have UVLO thresholds of 16 V (on) and 10 V (off).


## BLOCK DIAGRAM

(toggle flip flop used only in UC2844/45, UC3844/45)

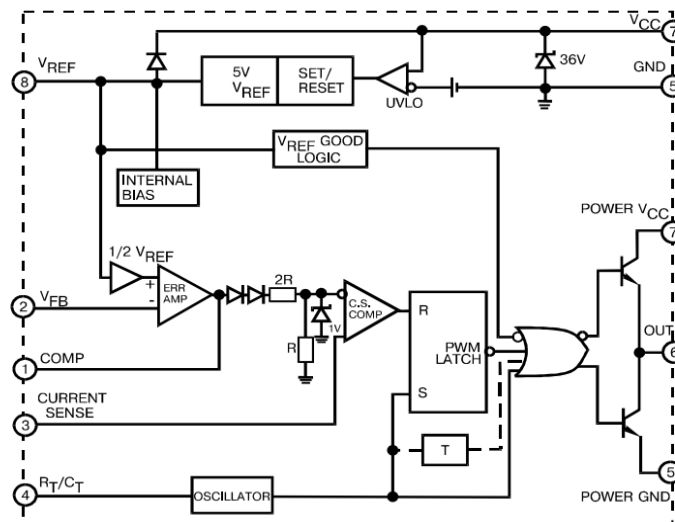



**PIN CONNECTION**  
(TOP VIEW)

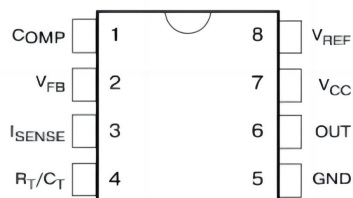

**PIN FUNCTION**

| N | FUNCTION                       | DESCRIPTION                                                                                                                                                             |
|---|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | COMP                           | This pin is the Error Amplifier output and is made for loop compensation.                                                                                               |
| 2 | V <sub>FB</sub>                | This is the inverting input of the Error Amplifier. It is normally connected to the switching power supply output through a resistor divider.                           |
| 3 | I <sub>SENSE</sub>             | A voltage proportional to inductor current is connected to this input. The PWM uses this information to terminate the output switch conduction.                         |
| 4 | R <sub>T</sub> /C <sub>T</sub> | The oscillator frequency and maximum Output duty cycle are programmed by connecting resistor R <sub>T</sub> to V <sub>REF</sub> and capacitor C <sub>T</sub> to ground. |
| 5 | GROUND                         | This pin is the combined control circuitry and power ground.                                                                                                            |
| 6 | OUTPUT                         | This output directly drives the gate of a power MOSFET. Peak currents up to 1A are sourced and sink by this pin.                                                        |
| 7 | V <sub>CC</sub>                | This pin is the positive supply of the integrated circuit.                                                                                                              |
| 8 | V <sub>ref</sub>               | This is the reference output. It provides charging current for capacitor C <sub>T</sub> through resistor R <sub>T</sub> .                                               |

**Absolute Maximum Ratings**

| Characteristic                           | Symbol                | Value       | Unit |
|------------------------------------------|-----------------------|-------------|------|
| Supply Voltage (low impedance source)    | V <sub>CC</sub>       | 30          | V    |
| Output Current                           | I <sub>O</sub>        | ±1          | A    |
| Input Voltage (Analog Inputs pins 2,3)   | V <sub>I</sub>        | -0.3 to 5.5 | V    |
| Error Amp Output Sink Current            | I <sub>SINK(EA)</sub> | 10          | mA   |
| Power Dissipation (T <sub>A</sub> =25°C) | P <sub>O</sub>        | 1           | W    |
| Storage Temperature Range                | T <sub>stg</sub>      | -65 to 150  | °C   |
| Lead Temperature (soldering 5 sec.)      | T <sub>L</sub>        | 260         | °C   |



Electrical characteristics (\* $V_{CC}=15V$ ,  $R_T=10k\Omega$ ,  $C_T=3.3nF$ ,  $T_A=0^\circ C$  to  $+70^\circ C$ , unless otherwise specified)

| Characteristics                           | Symbol                | Test Condition                                           | Min  | Typ  | Max  | Unit |
|-------------------------------------------|-----------------------|----------------------------------------------------------|------|------|------|------|
| Reference Section                         |                       |                                                          |      |      |      |      |
| Reference Output Voltage                  | V <sub>REF</sub>      | T <sub>J</sub> = 25°C, I <sub>REF</sub> = 1 mA           | 4.9  | 5.0  | 5.1  | V    |
| Line Regulation                           | ΔV <sub>REF</sub>     | 12V ≤ V <sub>CC</sub> ≤ 25 V                             |      | 6.0  | 20   | mV   |
| Load Regulation                           | ΔV <sub>REF</sub>     | 1 mA ≤ I <sub>REF</sub> ≤ 20mA                           |      | 6.0  | 25   |      |
| Short Circuit Output Current              | I <sub>SC</sub>       | T <sub>A</sub> = 25°C                                    |      | -100 | -180 | mA   |
| Oscillator Section                        |                       |                                                          |      |      |      |      |
| Oscillation Frequency                     | f                     | T <sub>J</sub> = 25°C                                    | 47   | 52   | 57   | KHz  |
| Frequency Change with Voltage             | Δf/ΔV <sub>CC</sub>   | 12V ≤ V <sub>CC</sub> ≤ 25 V                             |      | 0.05 | 1.0  | %    |
| Oscillator Amplitude                      | V <sub>(OSC)</sub>    | (peak to peak)                                           |      | 1.6  |      | V    |
| Error Amplifier Section                   |                       |                                                          |      |      |      |      |
| Input Bias Current                        | I <sub>BIAS</sub>     | V <sub>FB</sub> =3V                                      |      | -0.1 | -2   | μA   |
| Input Voltage                             | V <sub>I(EA)</sub>    | V <sub>pin1</sub> = 2.5V                                 | 2.42 | 2.5  | 2.58 | V    |
| Open Loop Voltage Gain                    | A <sub>VOL</sub>      | 2V ≤ V <sub>O</sub> ≤ 4V                                 | 65   | 90   |      | dB   |
| Unity Gain Bandwidth                      | UGBW                  | T <sub>J</sub> =25 <sup>0</sup> C, Note 3                | 0.5  | 0.6  |      | MHz  |
| Power Supply Rejection Ratio              | PSRR                  | 12V ≤ V <sub>CC</sub> ≤ 25 V                             | 60   | 70   |      | dB   |
| Output Sink Current                       | I <sub>SINK</sub>     | V <sub>pin2</sub> = 2.7V, V <sub>pin1</sub> = 1.1V       | 2    | 7    |      | mA   |
| Output Source Current                     | I <sub>SOURCE</sub>   | V <sub>pin2</sub> = 2.3V, V <sub>pin1</sub> = 5V         | -0.5 | -1.0 |      | mA   |
| High Output Voltage                       | V <sub>OH</sub>       | V <sub>pin2</sub> = 2.3V, R <sub>L</sub> = 15KΩ to GND   | 5.0  | 6.0  |      | V    |
| Low Output Voltage                        | V <sub>OL</sub>       | V <sub>pin2</sub> = 2.7V, R <sub>L</sub> = 15KΩ to PIN 8 |      | 0.8  | 1.1  |      |
| Current Sense Section                     |                       |                                                          |      |      |      |      |
| Gain                                      | G <sub>V</sub>        | (Note 1 & 2)                                             | 2.85 | 3.0  | 3.15 | V/V  |
| Maximum Input Signal                      | V <sub>I(MAX)</sub>   | V <sub>pin1</sub> = 5V (Note1)                           | 0.9  | 1.0  | 1.1  | V    |
| Supply Voltage Rejection                  | SVR                   | 12V ≤ V <sub>CC</sub> ≤ 25 V (Note 1)                    |      | 70   |      | dB   |
| Input Bias Current                        | I <sub>BIAS</sub>     | V <sub>pin3</sub> = 3V                                   |      | -3.0 | -10  | μA   |
| Output Section                            |                       |                                                          |      |      |      |      |
| Low Output Voltage                        | V <sub>OL</sub>       | I <sub>SINK</sub> = 20 mA                                |      | 0.08 | 0.4  | V    |
|                                           |                       | I <sub>SINK</sub> = 200 mA                               |      | 1.4  | 2.2  |      |
| High Output Voltage                       | V <sub>OH</sub>       | I <sub>SINK</sub> = 20 mA                                | 13   | 13.5 |      |      |
|                                           |                       | I <sub>SINK</sub> = 200 mA                               | 12   | 13.0 |      |      |
| Rise Time                                 | t <sub>R</sub>        | T <sub>J</sub> = 25°C, C <sub>L</sub> = 1nF (Note 3)     |      | 45   | 150  | nS   |
| Fall Time                                 | t <sub>F</sub>        | T <sub>J</sub> = 25°C, C <sub>L</sub> = 1nF (Note 3)     |      | 35   | 150  |      |
| Undervoltage Lockout Section              |                       |                                                          |      |      |      |      |
| Start Theshold                            | V <sub>TH(ST)</sub>   | UC2842/44,UC3842/44                                      | 14.5 | 16.0 | 17.5 | V    |
|                                           |                       | UC2843/45,UC3843/45                                      | 7.8  | 8.4  | 9.0  |      |
| Min. Operating Voltage<br>(After Turn On) | V <sub>OPR(min)</sub> | UC2842/44,UC3842/44                                      | 8.5  | 10   | 11.5 | V    |
|                                           |                       | UC2843/45,UC3843/45                                      | 7.0  | 7.6  | 8.2  |      |
| PWM Section                               |                       |                                                          |      |      |      |      |
| Max. Duty Cycle                           | D <sub>(MAX)</sub>    | UC2842/43,UC3842/43                                      | 95   | 97   | 100  | %    |
|                                           |                       | UC2844/45,UC3844/45                                      | 47   | 48   | 50   |      |
| Min. Duty Cycle                           | D <sub>(MAX)</sub>    |                                                          |      |      | 0    |      |
| Total Standby Current                     |                       |                                                          |      |      |      |      |
| Start-Up Current                          | I <sub>ST</sub>       | UC3842/43/44/45                                          |      | 0.17 | 0.3  | mA   |
| Operating Supply Current                  | I <sub>CC (OPR)</sub> | V <sub>pin3</sub> = V <sub>pin2</sub> = 0V               |      | 13   | 17   |      |
| Zener Voltage                             | V <sub>Z</sub>        | I <sub>CC</sub> =25 mA                                   | 30   | 38   |      | V    |

\* Adjust  $V_{CC}$  above the start threshold before setting it to 15V.

Note 1: Parameter measured at trip point of latch with  $V_{pin2}=0$ .

Note 2: Gain defined as  $A=\Delta V_{pin1}/\Delta V_{pin3}$ ;  $0 \leq V_{pin3} \leq 0.8V$ .

Note 3: These parameters, although guaranteed, are not 100% tested in production.



## APPLICATION INFORMATION




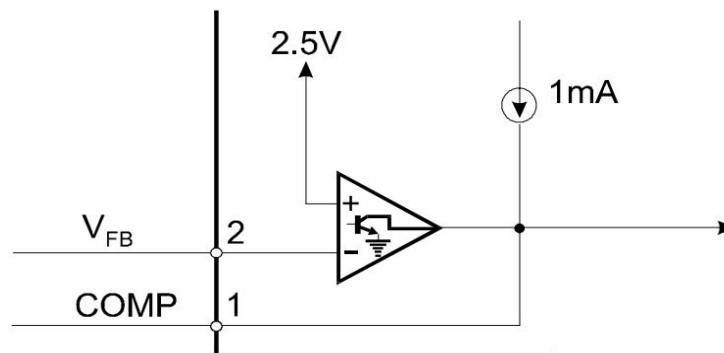


Figure 1. Error Amp Configuration

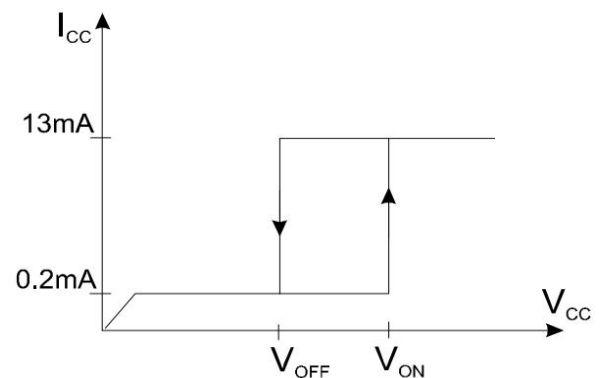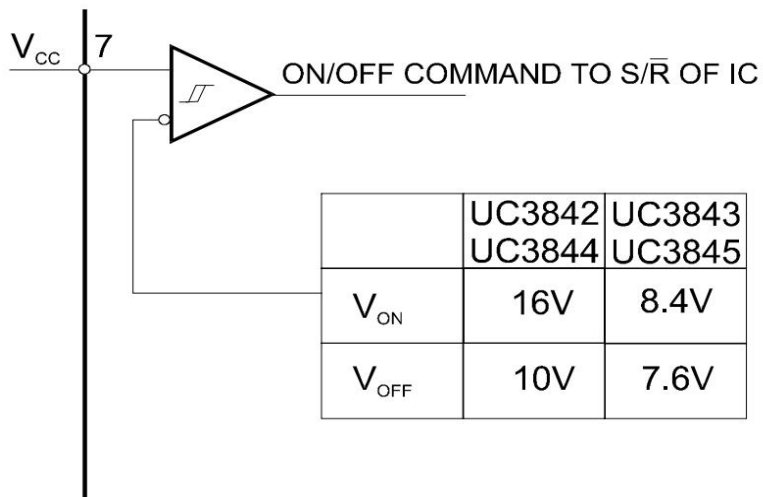

During UVLO, the Output is low

Figure 2. Under voltage Lockout

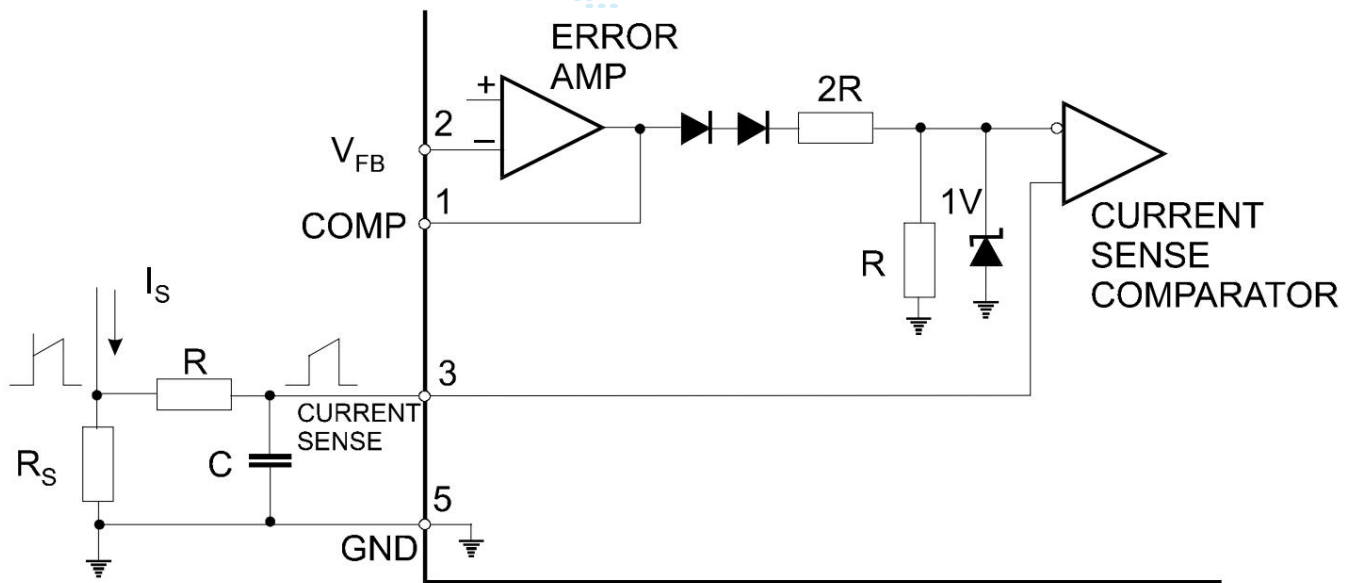

Peak current is determined by  $I_{S\max} \approx \frac{1.0V}{R_S}$

Figure 3. Current Sense Circuit



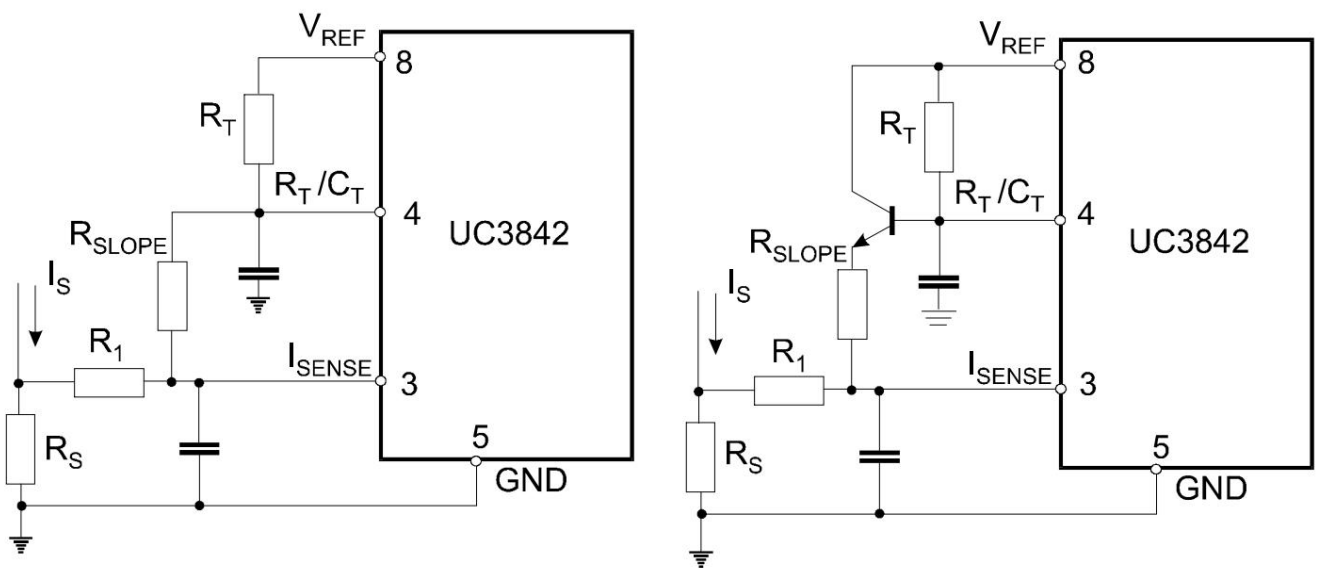


Figure 4. Slope Compensation Techniques

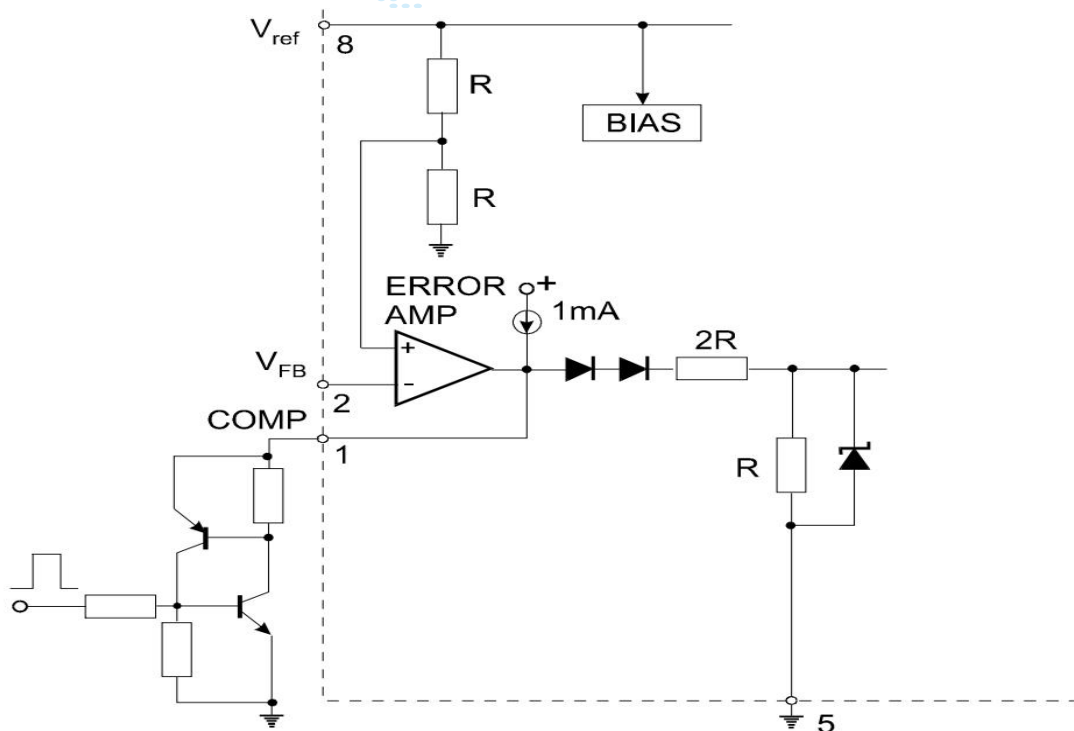


SCR must be selected for a holding current of less than 0.5mA.  
The simple two transistor circuit can be used in place of the SCR as shown.

Figure 5. Latched Shutdown

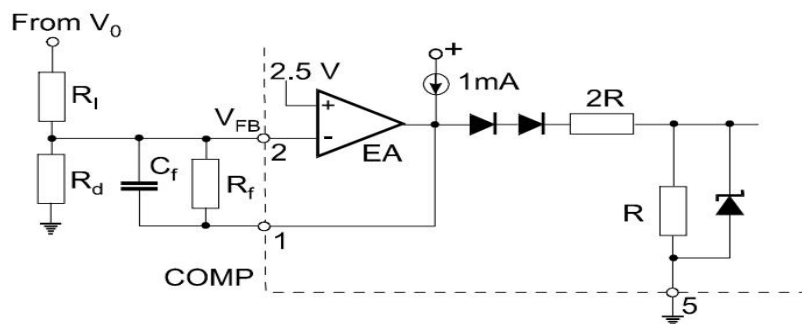

Error Amp compensation circuit for stabilizing any current-mode topology except for boost and flyback converters operating with continuous inductor current.

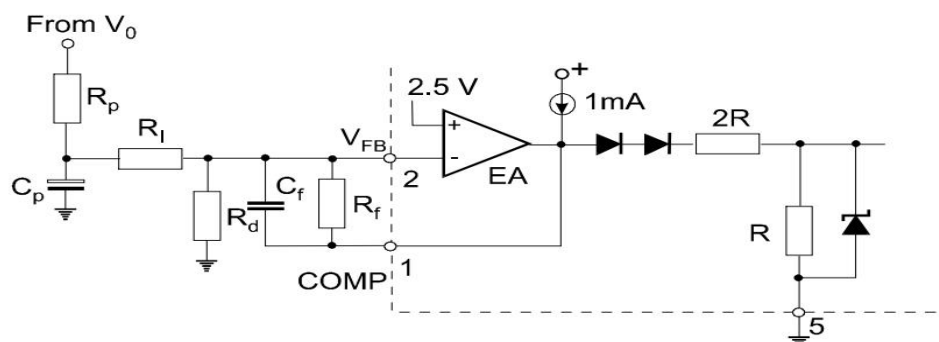

Error Amp compensation circuit for stabilizing current-mode boost and flyback topologies operating with continuous inductor current.

Figure 6. Error Amplifier Compensation

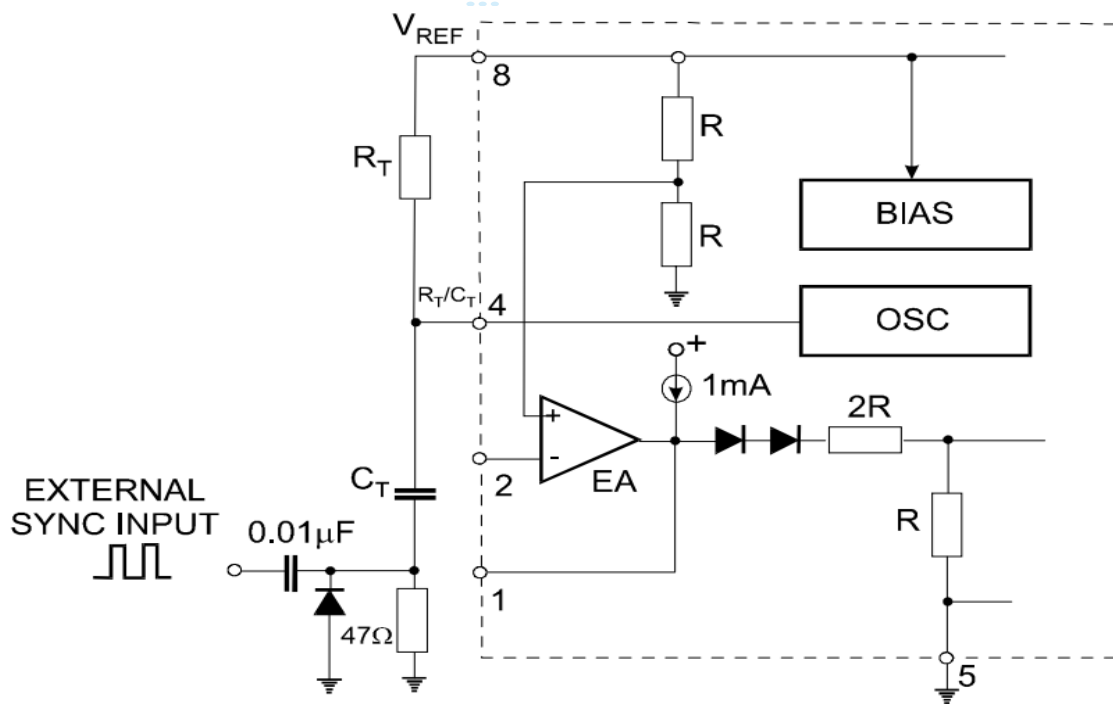


Figure 7. External Clock Synchronization

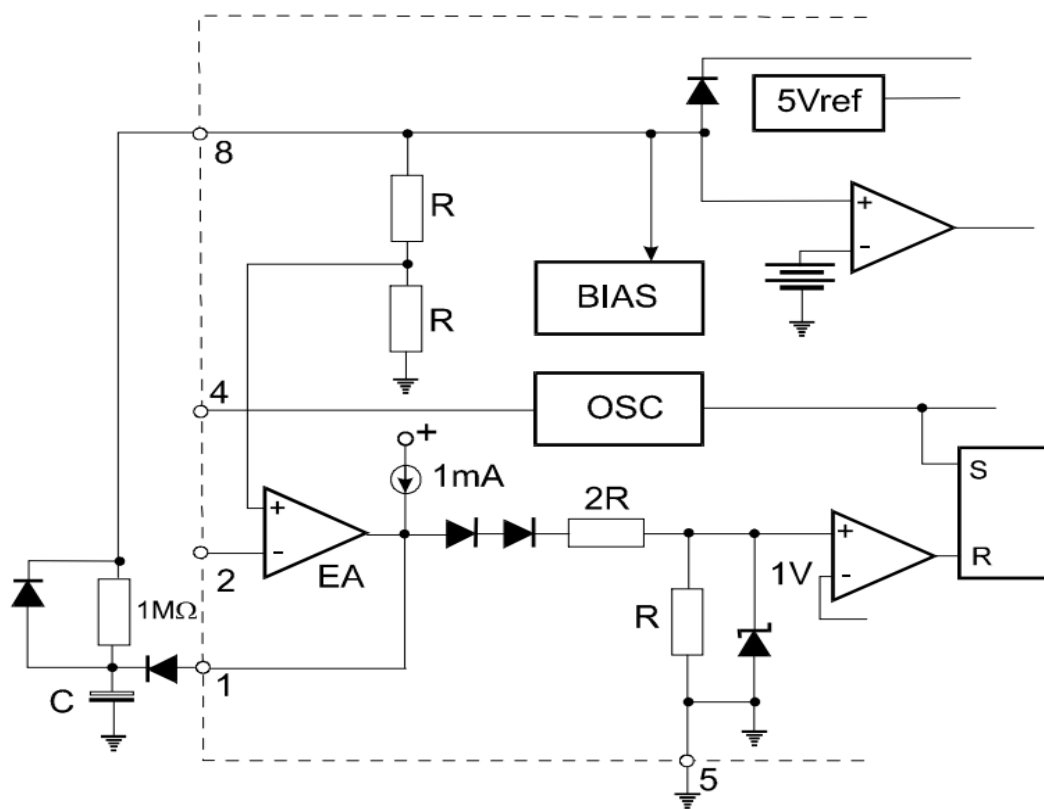


Figure 8. Soft-Start Circuit



## TYPICAL PERFORMANCE CHARACTERISTICS

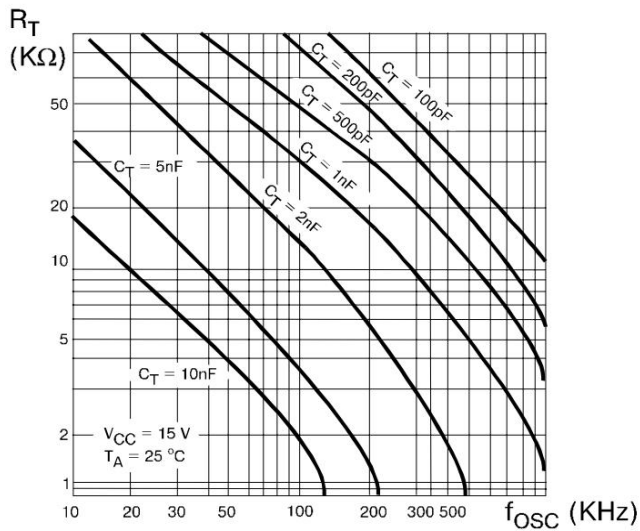


Figure 1. Timing Resistor vs. Oscillator Frequency

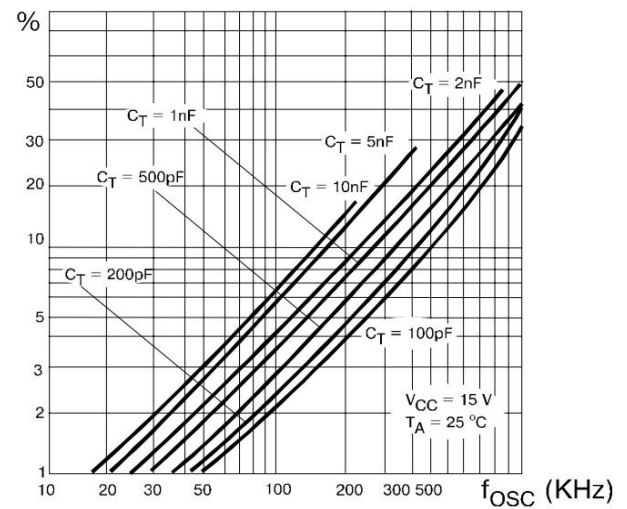


Figure 2. Output Dead-Time vs. Oscillator Frequency

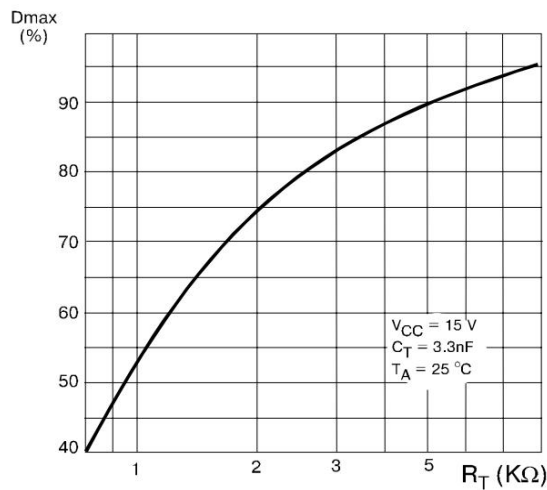


Figure 3. Maximum Output Duty Cycle vs. Timing Resistor (UC3842/43)

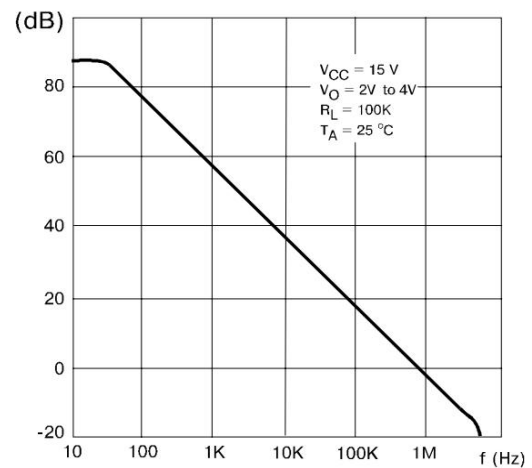


Figure 4. Error Amp Open-Loop Gain vs. Frequency

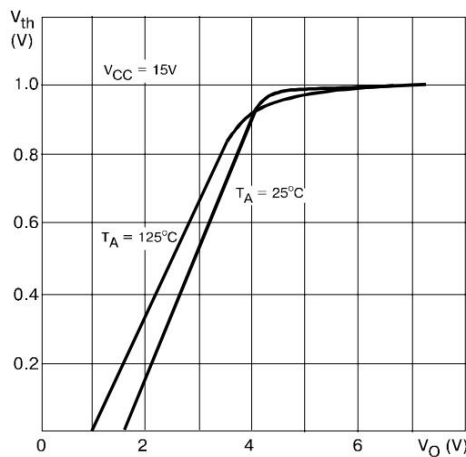


Figure 5. Current Sense Input Threshold vs. Error Amp Output Voltage

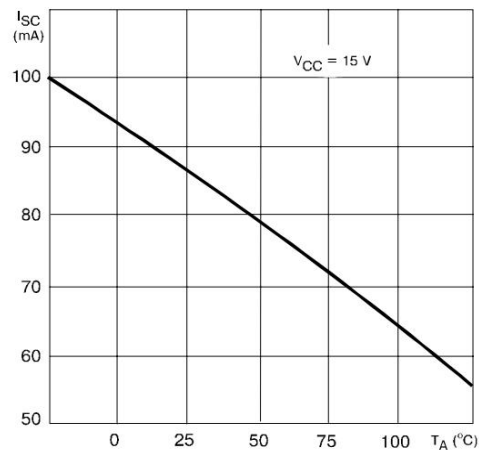


Figure 6. Reference Short Circuit Current vs. Temperature

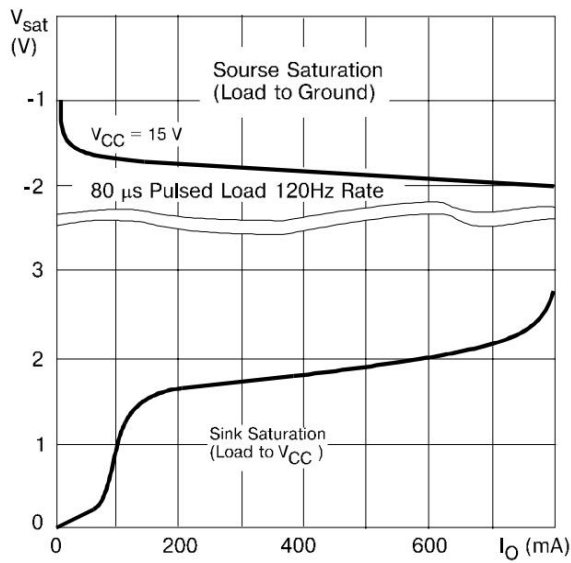


Figure 7. Output Saturation Voltage vs. Load Current  
 $T_A = 25^\circ\text{C}$

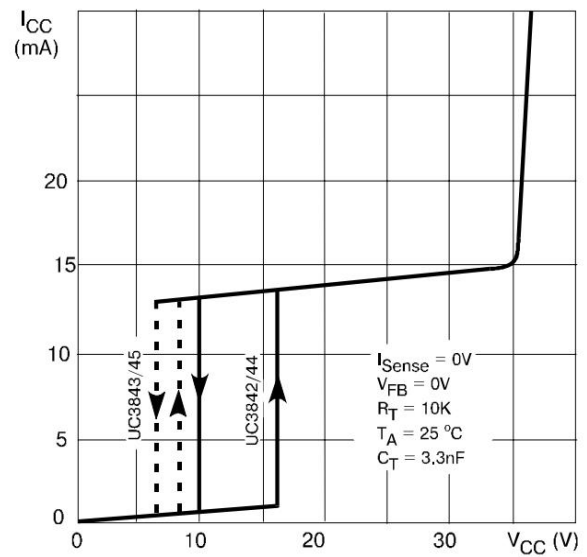


Figure 8. Supply Current vs. Supply Voltage

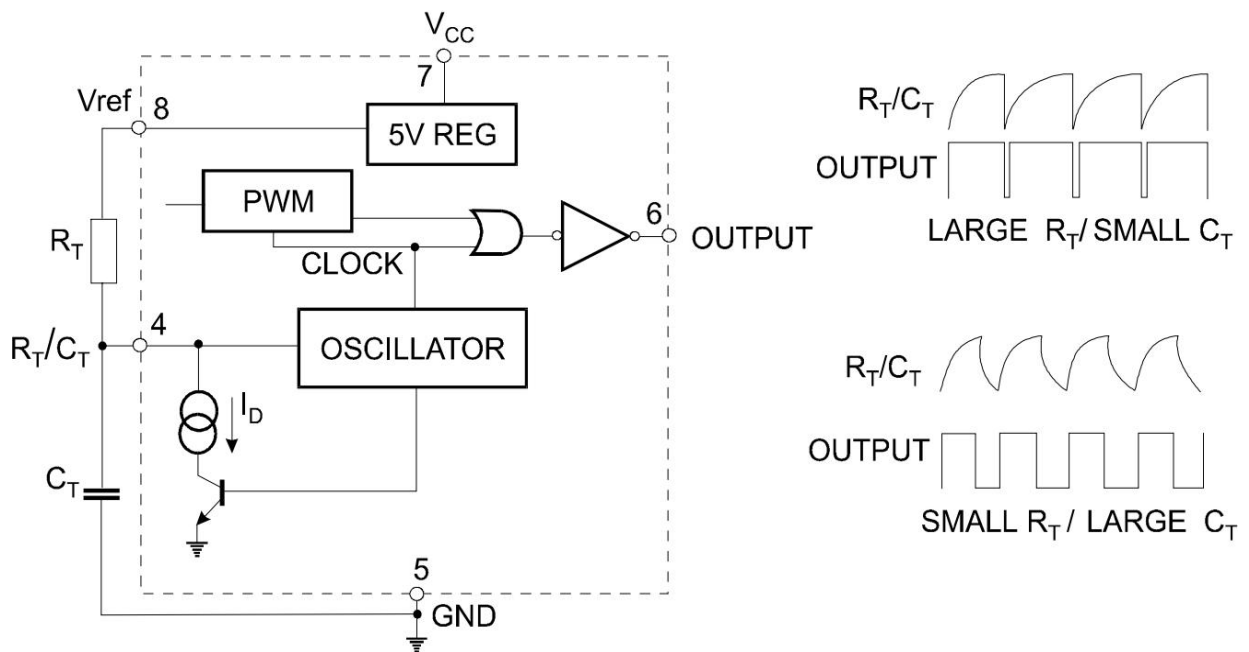


Figure 9. Oscillator and Output Waveforms



## Ordering information

| Order Number     | Package | Package Quantity | Marking On The park |
|------------------|---------|------------------|---------------------|
| UC2842AQD8R-TUDI | SOP8    | Tape,Reel,2500   | UC2842AQ            |



PACKAGE




SOP8

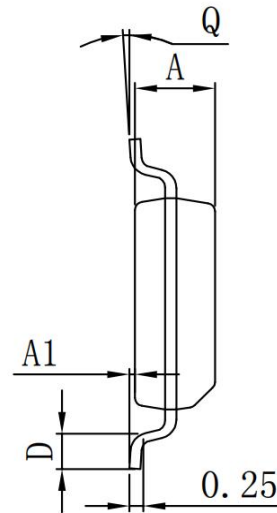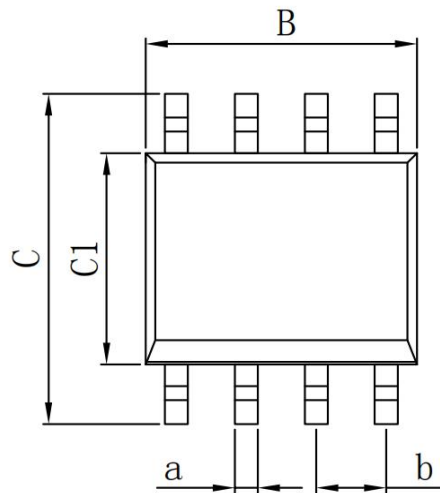

Dimensions In Millimeters

| Symbol : | Min : | Max : | Symbol : | Min :     | Max : |
|----------|-------|-------|----------|-----------|-------|
| A        | 1.225 | 1.570 | D        | 0.400     | 0.950 |
| A1       | 0.100 | 0.250 | Q        | 0°        | 8°    |
| B        | 4.800 | 5.100 | a        | 0.420 TYP |       |
| C        | 5.800 | 6.250 | b        | 1.270 TYP |       |
| C1       | 3.800 | 4.000 |          |           |       |

DIP8



Dimensions In Millimeters

| Symbol : | Min : | Max : | Symbol : | Min :     | Max : |
|----------|-------|-------|----------|-----------|-------|
| A        | 6.100 | 6.680 | L1       | 3.000     | 3.600 |
| B        | 9.000 | 9.500 | a        | 1.524 TYP |       |
| D        | 8.400 | 9.000 | b        | 0.889 TYP |       |
| D1       | 7.420 | 7.820 | c        | 0.457 TYP |       |
| E        | 3.100 | 3.550 | d        | 2.540 TYP |       |
| L        | 0.500 | 0.700 |          |           |       |



## Important statement:

- TUDI Semiconductor reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using TUDI Semiconductor products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- TUDI Semiconductor products have not been licensed for life support, military, and aerospace applications, and therefore TUDI Semiconductor is not responsible for any consequences arising from the use of this product in these areas.
- If any or all TUDI Semiconductor products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all TUDI Semiconductor products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- TUDI Semiconductor documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. TUDI Semiconductor assumes no responsibility or liability for altered documents.
- TUDI Semiconductor is committed to becoming the preferred semiconductor brand for customers, and TUDI Semiconductor will strive to provide customers with better performance and better quality products.