






组装示意图

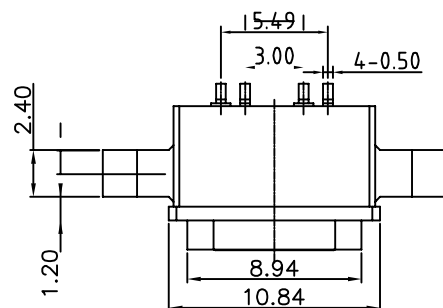

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

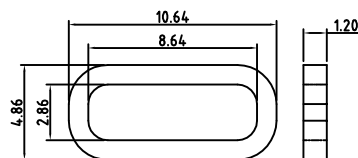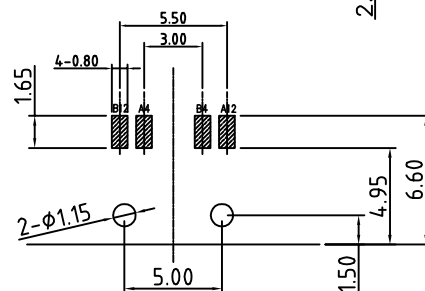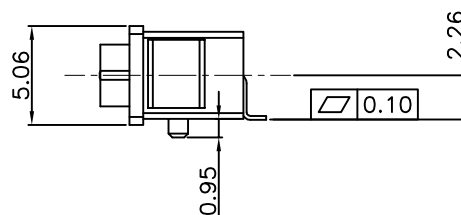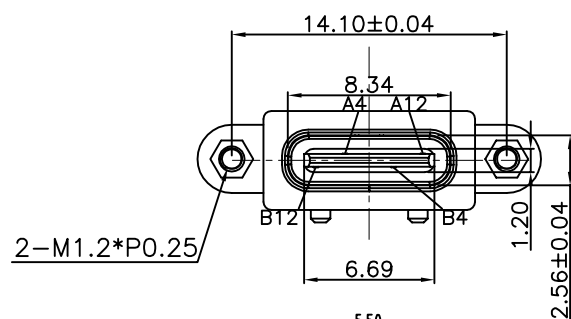

建议胶圈尺寸

注: 防水圈是厚度1.2mm的
硅胶圈, 防水圈将压盖, 由1.2mm将压到
0.7mm ~ 0.8mm, 防水效果好

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

A4	VBUS	B12	GND
A12	GND	B4	VBUS
PIN	SIGNAL NAME	PIN	SIGNAL NAME

ITEM	PARTNAME	Q'TY	FINISH	NOTE
4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni:40~120u";
3	Housing2	1	LCP(G.F30%)	
2	Contact	4	Phosphor bronze_C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY :	DATE :	PART NAME:
	陈一鸣	2014-02-23	USB TYPE C 防水母座4P 带螺母SMT
	CHECKED BY:	DATE :	PART NO.
	马跃	2014-02-23	HYCW335-USBC04-141B
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY:	DATE :	DRAW NO:
	邱敏	2014-02-23	HYC-2206091032
			SHEET NO.
			1 OF 1