



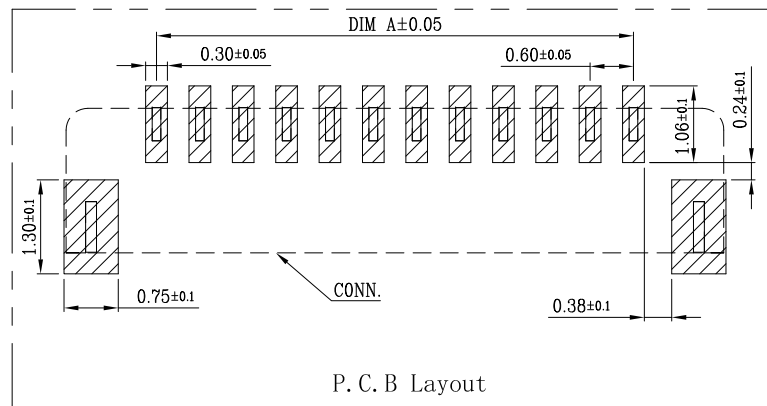
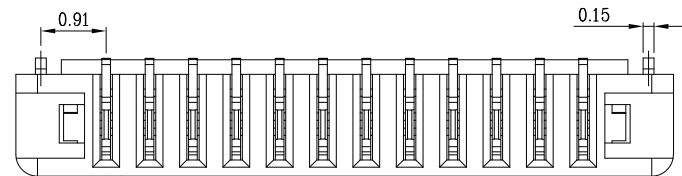
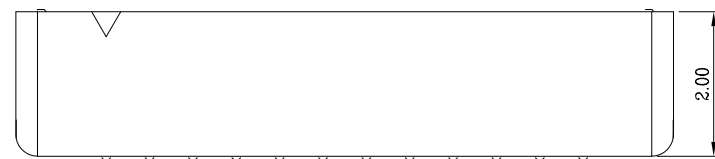


RoHS

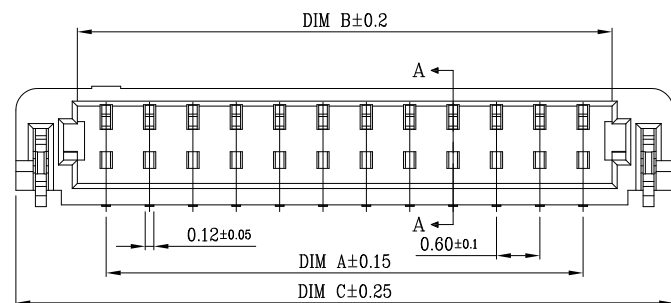

SECTION A-A

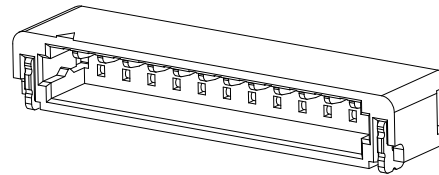

TECHNICAL INDEX:

- 1.THE SURFACE OF THE PLASTIC PARTS SHOULD BE SMOOTH,NO ROUGH EDGES,NO OBVIOUS SHRINKAGE,DEFECTS,CRACKS AND OTHER PHENOMENA.
- 2.TEMPERATURE RANGE: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
- 3.RATED VOLTAGE: 50V, AC/DC.
- 4.CONTACT RESISTANCE: $\leq 20\text{m}\Omega$.
- 5.INSULATION RESISTANCE: $\geq 100\text{M}\Omega$
- 6.VOLTAGE TOLERANCE: 200V, AC/MINUTE.

CKT	DIM A	DIM B	DIM C
2	0.60	1.40	3.10
3	1.20	2.00	3.70
4	1.80	2.60	4.30
5	2.40	3.20	4.90
6	3.00	3.80	5.50
7	3.60	4.40	6.10
8	4.20	5.00	6.70
9	4.80	5.60	7.30
10	5.40	6.20	7.90
11	6.00	6.80	8.50
12	6.60	7.40	9.10
13	7.20	8.00	9.70
14	7.80	8.60	10.30
15	8.40	9.20	10.90
16	9.00	9.80	11.50
17	9.60	10.40	12.10
18	10.20	11.00	12.70
19	10.80	11.60	13.30
20	11.40	12.20	13.90
21	12.00	12.80	14.50
22	12.60	13.40	15.10

③	WELDING STRIP	1	BRASS	Sn PLATED	
②	PIN	NP	PHOSPHRUS BRONZE	Sn PLATED	
①	O-RING	1	LCP UL94V-0	BLACK	
No.	PART NAME	Q'TY	MATERIAL	EP/COLOR	REMARK

TOLERANCE UNLESS OTHERWISE SPEC		SHENZHEN FUGANG TECHNOLOGY CO.,LTD				
BASIC DIMENSION	TOLERANCE	DSND	W D	26.06.10	TITLE:0.60 PITCH HORIZONTAL WTB	
.x	± 0.50	CHKD	LPJ	26.06.10	PART NO:FG-0.6-NAWT	
x.x	± 0.20	APVD	LZW	26.06.10	REV:A	
x.xx	± 0.10			UNIT:mm	SCALE:1:1	SIZE:A4
ANGLES	$\pm 1^{\circ}$					SHEET:1/1