



FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors
- Surface mount package ideally Suited for Automatic Insertion

Equivalent Circuit



SOT-23



MARKING: E32

1.IN 2.GND 3.OUT

MAXIMUM RATINGS (Ta=25 °C unless otherwise noted)


Symbol	Parameter	Limits	Unit
V_{CC}	Supply Voltage	-50	V
V_{IN}	Input Voltage	-12 ~ +5	V
I_O	Output Current	-100	mA
P_D	Power Dissipation	200	mW
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55 ~ +150	°C

ELECTRICAL CHARACTERISTICS (Ta=25 °C unless otherwise specified)


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	$V_{I(off)}$	$V_{CC} = -5V, I_O = -100\mu A$	-0.5			V
	$V_{I(on)}$	$V_O = -0.3V, I_O = -5mA$			-1.1	V
Output voltage	$V_{O(on)}$	$I_O/I_I = -5mA/-0.25mA$		-0.1	-0.3	V
Input current	I_I	$V_I = -5V$			-3.6	mA
Output current	$I_{O(off)}$	$V_{CC} = -50V, V_I = 0$			-0.5	μA
DC current gain	G_I	$V_O = -5V, I_O = -10mA$	80			
Input resistance	R_1		1.54	2.2	2.86	k Ω
Resistance ratio	R_2/R_1		17	21	26	
Transition frequency	f_T	$V_O = -10V, I_O = -5mA, f = 100MHz$		250		MHz

Typical Characteristics


ON Characteristics

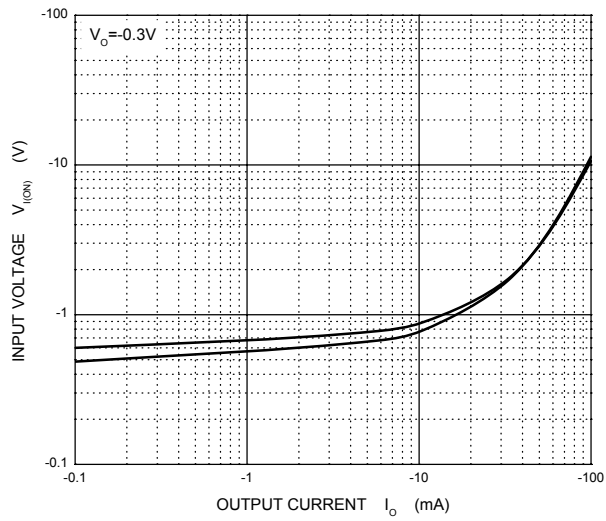


OFF Characteristics

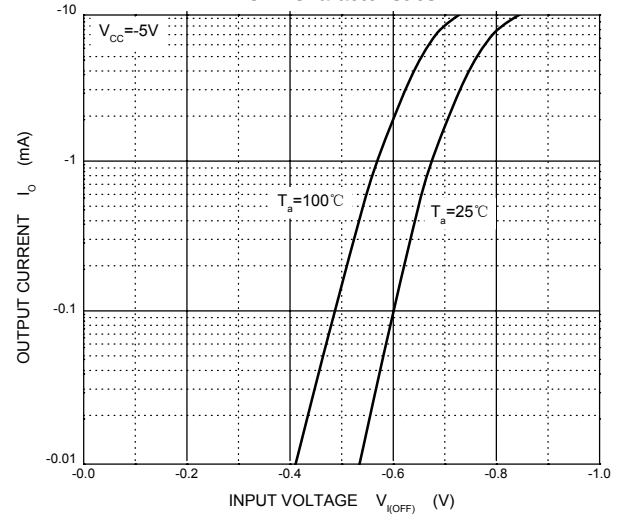


$V_{o(ON)}$ — I_o

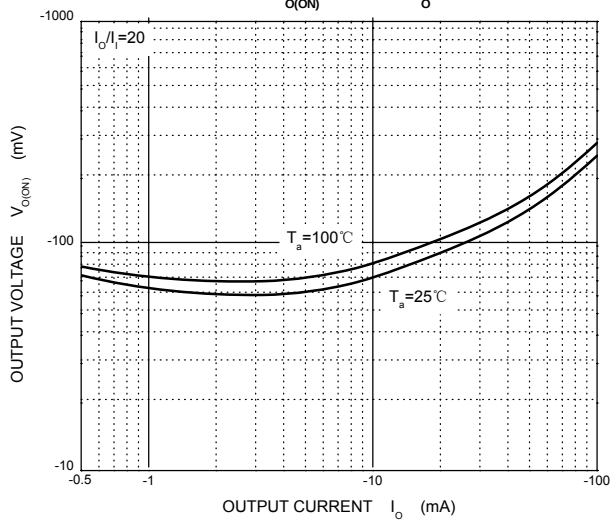


G_i — I_o

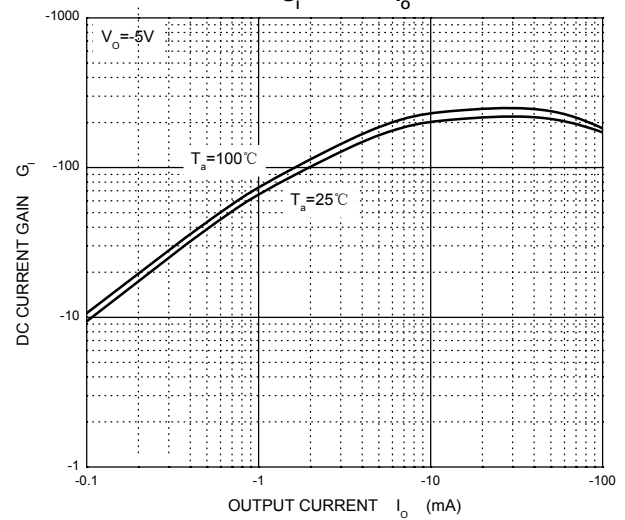




C_o — V_R

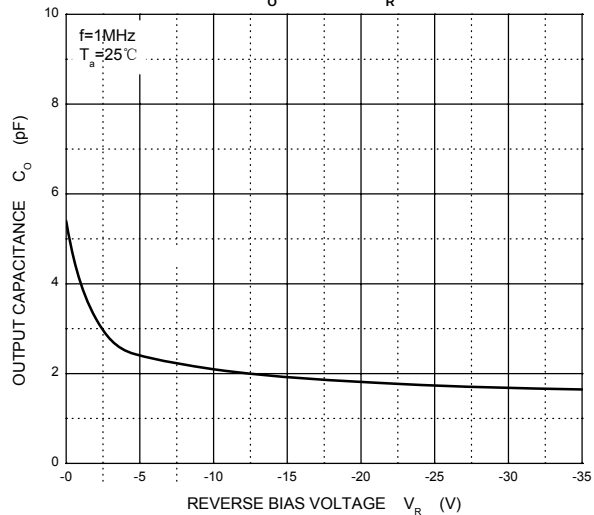

P_D — T_a

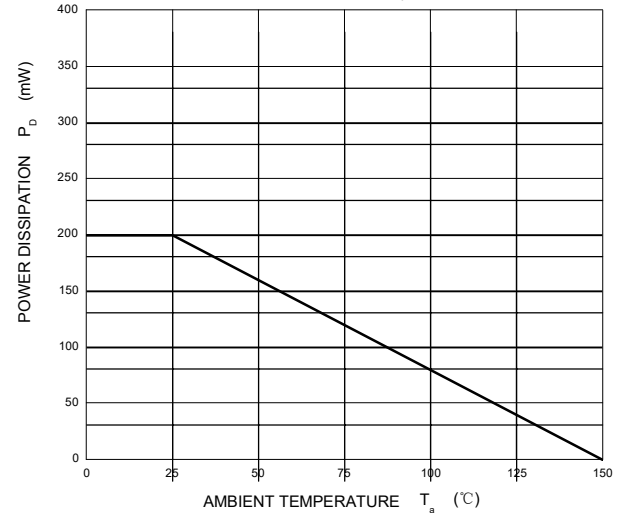


SOT-23 Package Outline Dimensions



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



Note:

1. Controlling dimension: In millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.