



Contactor, 3p, 45kW/400V/AC3

Part no. DILM95(RDC24)
Article no. 239510
Catalog No. XTCE095F00TD


Delivery programme

| | | | | |
|---|----------------|----|--|--|
| Product range | | | | Contactors |
| Application | | | | Contactors for Motors |
| Subrange | | | | Contactors up to 170 A, 3 pole |
| Utilization category | | | | AC-1: Non-inductive or slightly inductive loads, resistance furnaces AC-3: Squirrel-cage motors: starting, switching off during running AC-4: Squirrel-cage motors: starting, plugging, reversing, inching |
| Connection technique | | | | Screw terminals |
| Pole | | | | 3 pole |
| Rated operational current | | | | |
| AC-3 | | | | |
| 380 V 400 V | I_e | A | | 95 |
| AC-1 | | | | |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz | | | | |
| Open | | | | |
| at 40 °C | $I_{th} = I_e$ | A | | 130 |
| enclosed | I_{th} | A | | 100 |
| Conventional free air thermal current, 1 pole | | | | |
| open | I_{th} | A | | 275 |
| enclosed | I_{th} | A | | 250 |
| Max. rating for three-phase motors, 50 - 60 Hz | | | | |
| AC-3 | | | | |
| 220 V 230 V | P | kW | | 30 |
| 380 V 400 V | P | kW | | 45 |
| 660 V 690 V | P | kW | | 75 |
| AC-4 | | | | |
| 220 V 230 V | P | kW | | 16 |
| 380 V 400 V | P | kW | | 26 |
| 660 V 690 V | P | kW | | 35 |
| Contact sequence | | | | |
| Instructions | | | | Contacts to EN 50012. integrated suppressor circuit in actuating electronics |
| Can be combined with auxiliary contact | | | | DILM150-XHI(V).. DILM1000-XHI(V).. |
| Voltage AC/DC | | | | DC operation |

Approvals

| | |
|--------------------------------------|---|
| Product Standards | IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking |
| UL File No. | E29096 |
| UL Category Control No. | NLDX |
| CSA File No. | 012528 |
| CSA Class No. | 2411-03, 3211-04 |
| North America Certification | UL listed, CSA certified |
| Specially designed for North America | No |

General
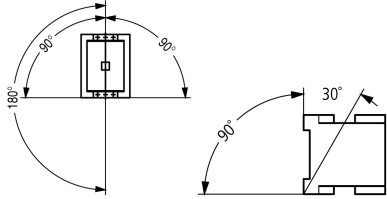
| | | | |
|---|-------------------------------------|-----------------|--|
| Standards | | | IEC/EN 60947, VDE 0660, UL, CSA |
| Lifespan, mechanical | | | |
| AC operated | Operations | $\times 10^6$ | 10 |
| DC operated | Operations | $\times 10^6$ | 10 |
| Operating frequency, mechanical | | | |
| AC operated | Operations/h | | 3600 |
| DC operated | Operations/h | | 3600 |
| Climatic proofing | | | Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature | | °C | |
| Open | | °C | - 25 - 60 |
| Enclosed | | °C | - 25 - 40 |
| Storage | | °C | - 40 - 80 |
| Mounting position | | |  |
| Mechanical shock resistance (IEC/EN 60068-2-27) | | | |
| Half-sinusoidal shock, 10 ms | | | |
| Main contacts | | | |
| N/O contact | | g | 10 |
| Auxiliary contacts | | | |
| N/O contact | | g | 7 |
| N/C contact | | g | 5 |
| Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted | | | |
| Half-sinusoidal shock, 10 ms | | | |
| Main contacts | | | |
| N/O contact | | g | 10 |
| Auxiliary contacts | | | |
| N/O contact | | g | 7 |
| N/C contact | | g | 5 |
| Degree of Protection | | | IP00 |
| Protection against direct contact when actuated from front (EN 50274) | | | Finger and back-of-hand proof |
| Weight | | | |
| AC operated | | kg | 2 |
| DC operated | | kg | 2.1 |
| Terminal capacity main cable | | | |
| Flexible with ferrule | | mm ² | 1 x (10 - 95) 2 x (10 - 70) |
| Stranded | | mm ² | 1 x (16 - 95) 2 x (16 - 70) |
| Solid or stranded | | AWG | 8...3/0 |
| Flat conductor | Lamellenzahl x Breite x Dicke | mm | 2 x (6 x 16 x 0.8) |
| Main cable connection screw/bolt | | | M10 |
| Tightening torque | | Nm | 14 |
| Terminal capacity control circuit cables | | | |
| Solid | | mm ² | 1 x (0.75 - 4) 2 x (0.75 - 4) |
| Flexible with ferrule | | mm ² | 1 x (0.75 - 2.5) 2 x (0.75 - 2.5) |
| Solid or stranded | | AWG | 18 - 14 |
| Control circuit cable connection screw/bolt | | | M3.5 |
| Tightening torque | | Nm | 1.2 |

| | | | |
|--|----|-----------------|--------------------------------------|
| Tool | | | |
| Main cable | | | |
| Hexagon socket-head spanner | SW | mm | 5 |
| Control circuit cables | | | |
| Pozidriv screwdriver | | Size | 2 |
| Standard screwdriver | | mm | 0.8 x 5.5 1 x 6 |
| Terminal capacity control circuit cables | | | |
| Solid | | mm ² | 1 x (0.75 - 2.5) 2 x (0.75 - 2.5) |
| Flexible | | mm ² | 1 x (0.75 - 2.5) 2 x (0.75 - 2.5) |
| Flexible with ferrule | | mm ² | 1 x (0.75 - 1.5) 2 x (0.75 - 1.5) |
| Solid or stranded | | AWG | 18 - 14 |
| Tool | | | |
| Stripping length | | mm | 10 |
| Screwdriver blade width | | mm | 3.5 |

Main conducting paths

| | | | |
|--|----------------|------|-------|
| Rated impulse withstand voltage | U_{imp} | V AC | 8000 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated insulation voltage | U_i | V AC | 690 |
| Rated operational voltage | U_e | V AC | 690 |
| Safe isolation to EN 61140 | | | |
| between coil and contacts | | V AC | 690 |
| between the contacts | | V AC | 690 |
| Making capacity (p.f. to IEC/EN 60947) | | | |
| | U_p to 690 V | A | 1330 |
| Breaking capacity | | | |
| 220 V 230 V | | A | 950 |
| 380 V 400 V | | A | 950 |
| 500 V | | A | 950 |
| 660 V 690 V | | A | 800 |
| Short-circuit rating | | | |
| Short-circuit protection maximum fuse | | | |
| Type "2" coordination | | | |
| 400 V | gG/gL 500 V | A | 160 |
| 690 V | gG/gL 690 V | A | 160 |
| Type "1" coordination | | | |
| 400 V | gG/gL 500 V | A | 250 |
| 690 V | gG/gL 690 V | A | 200 |

AC

| | | | |
|---|----------------|---|-----|
| AC-1 | | | |
| Rated operational current | | | |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz | | | |
| Open | | | |
| at 40 °C | $I_{th} = I_e$ | A | 130 |
| at 50 °C | $I_{th} = I_e$ | A | 125 |
| at 55 °C | $I_{th} = I_e$ | A | 115 |
| at 60 °C | $I_{th} = I_e$ | A | 110 |
| enclosed | I_{th} | A | 100 |
| Conventional free air thermal current, 1 pole | | | |
| open | I_{th} | A | 275 |
| enclosed | I_{th} | A | 250 |
| AC-3 | | | |
| Rated operational current | | | |

| | | | |
|--------------------------|-------|-----|----|
| Open, 3-pole: 50 – 60 Hz | | | |
| 220 V 230 V | I_e | A | 95 |
| 240 V | I_e | A | 95 |
| 380 V 400 V | I_e | A | 95 |
| 415 V | I_e | A | 95 |
| 440V | I_e | A | 95 |
| 500 V | I_e | A | 95 |
| 660 V 690 V | I_e | A | 80 |
| Motor rating | P | kWh | |
| 220 V 230 V | P | kW | 30 |
| 240V | P | kW | 32 |
| 380 V 400 V | P | kW | 45 |
| 415 V | P | kW | 57 |
| 440 V | P | kW | 60 |
| 500 V | P | kW | 70 |
| 660 V 690 V | P | kW | 75 |
| AC-4 | | | |
| Open, 3-pole: 50 – 60 Hz | | | |
| 220 V 230 V | I_e | A | 50 |
| 240 V | I_e | A | 50 |
| 380 V 400 V | I_e | A | 50 |
| 415 V | I_e | A | 50 |
| 440 V | I_e | A | 50 |
| 500 V | I_e | A | 50 |
| 660 V 690 V | I_e | A | 37 |
| Motor rating | P | kWh | |
| 220 V 230 V | P | kW | 16 |
| 240 V | P | kW | 17 |
| 380 V 400 V | P | kW | 26 |
| 415 V | P | kW | 30 |
| 440 V | P | kW | 32 |
| 500 V | P | kW | 36 |
| 660 V 690 V | P | kW | 35 |

DC

| | | | |
|---------------------------------|-------|---|-----|
| Rated operational current, open | | | |
| DC-1 | | | |
| 60 V | I_e | A | 110 |
| 110 V | I_e | A | 110 |
| 220 V | I_e | A | 70 |
| 440 V | I_e | A | 4.5 |
| DC-3 | | | |
| 60 V | I_e | A | 110 |
| 110 V | I_e | A | 110 |
| 220 V | I_e | A | 35 |
| 440 V | I_e | A | 1 |
| DC-5 | | | |
| 60 V | I_e | A | 110 |
| 110 V | I_e | A | 110 |
| 220 V | I_e | A | 35 |
| 440 V | I_e | A | 1 |


Current heat loss

| | | | |
|--|--|---|------|
| 3-pole at I_{th} | | W | 18.2 |
| Current heat loss at I_e to AC-3/400 V | | W | 13.5 |


| | | | |
|--|----------|-------------------|---|
| Impedance per pole | | mΩ | 0.5 |
| Magnet systems | | | |
| Voltage tolerance | | x U _c | |
| AC operated | Pick-up | x U _c | 0.8 - 1.1 |
| Drop-out voltage AC operated | Drop-out | x U _c | 0.3 - 0.6 |
| Notes | | | RDC 24 (U _{min} 24 V DC/U _{max} 27 V DC) Example: U _c = 0.7 x U _{min} - 1.2 x U _{max} / U _c = 0.7 x 24 V - 1.2 x 27 V DC |
| DC operated | Pick-up | x U _c | 0.7 - 1.2 |
| Notes | | | at least smoothed two-phase bridge rectifier or three-phase rectifier |
| DC operated | Drop-out | x U _c | 0.15 - 0.65 |
| Power consumption of the coil in a cold state and 1.0 x U _c | | | |
| 50 Hz | Pick-up | VA | 310 |
| 50 Hz | Sealing | VA | 26 |
| 50 Hz | Sealing | W | 5.8 |
| 60 Hz | Pick-up | VA | 345 |
| 60 Hz | Sealing | VA | 30 |
| 60 Hz | Sealing | W | 7.1 |
| 50/60 Hz | Pick-up | VA | 372 328 |
| 50/60 Hz | Sealing | VA | 37.1 22.6 |
| 50/60 Hz | Sealing | W | 7.5 6.1 |
| DC operated | Pick-up | W | 90 |
| DC operated | Sealing | W | 1.3 |
| Duty factor | | % DF | 100 |
| Switching times at 100 % U _c (approximate values) | | | |
| Main contacts | | | |
| AC operated | | | |
| Closing delay | | ms | 14 - 20 |
| Opening delay | | ms | 9 - 14 |
| DC operated | | | |
| Closing delay | | ms | 45 |
| Opening delay | | ms | 34 |
| Arcing time | | ms | 15 |
| Permissible residual current with actuation of A1 - A2 by the electronics (with 0 signal). | | mA | $\frac{I}{1}$ |
| Lifespan, mechanical; Coil 50/60 Hz | | x 10 ⁶ | Mechanical lifespan at 50 Hz approx. 30% lower than under "General" |
| Electromagnetic compatibility (EMC) | | | |
| Emitted interference | | | to EN 60947-1 |
| Interference immunity | | | to EN 60947-1 |

Technical data ETIM 5.0

| Low-voltage industrial components (EG000017) / Magnet contactor, AC-switching (EC000066) | | |
|--|----|------------------|
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss8-27-37-10-03 [AAB718011]) | | |
| Rated control supply voltage U_s at AC 50HZ | V | 0 - 0 |
| Rated control supply voltage U_s at AC 60HZ | V | 0 - 0 |
| Rated control supply voltage U_s at DC | V | 24 - 27 |
| Voltage type for actuating | | DC |
| Rated operation current I_e at AC-1, 400 V | A | 130 |
| Rated operation current I_e at AC-3, 400 V | A | 95 |
| Rated operation power at AC-3, 400 V | kW | 45 |
| Rated operation current I_e at AC-4, 400 V | A | 50 |
| Rated operation power I_e at AC-4, 400 V | kW | 26 |
| Modular version | | No |
| Number of auxiliary contacts as normally open contact | | 0 |
| Number of auxiliary contacts as normally closed contact | | 0 |
| Connection type main current circuit | | Screw connection |
| Number of normally closed contacts as main contact | | 0 |
| Number of main contacts as normally open contact | | 3 |

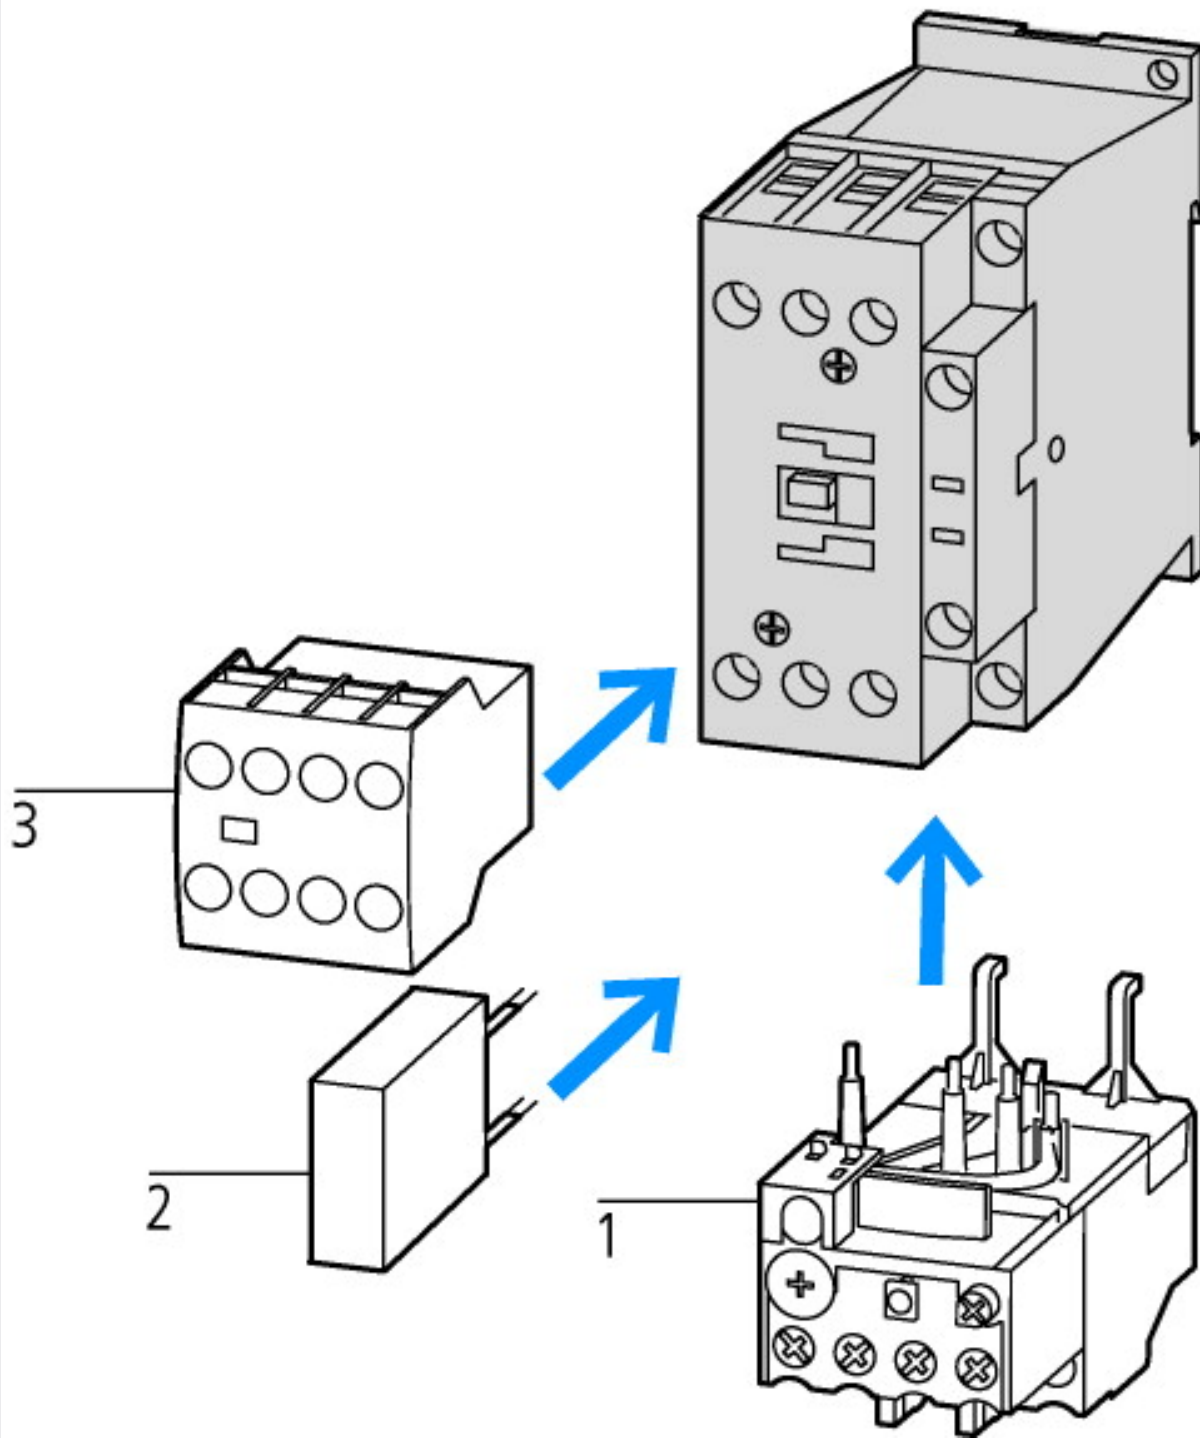


- 1: Overload relay
- 2: Suppressor
- 3: Auxiliary contact modules

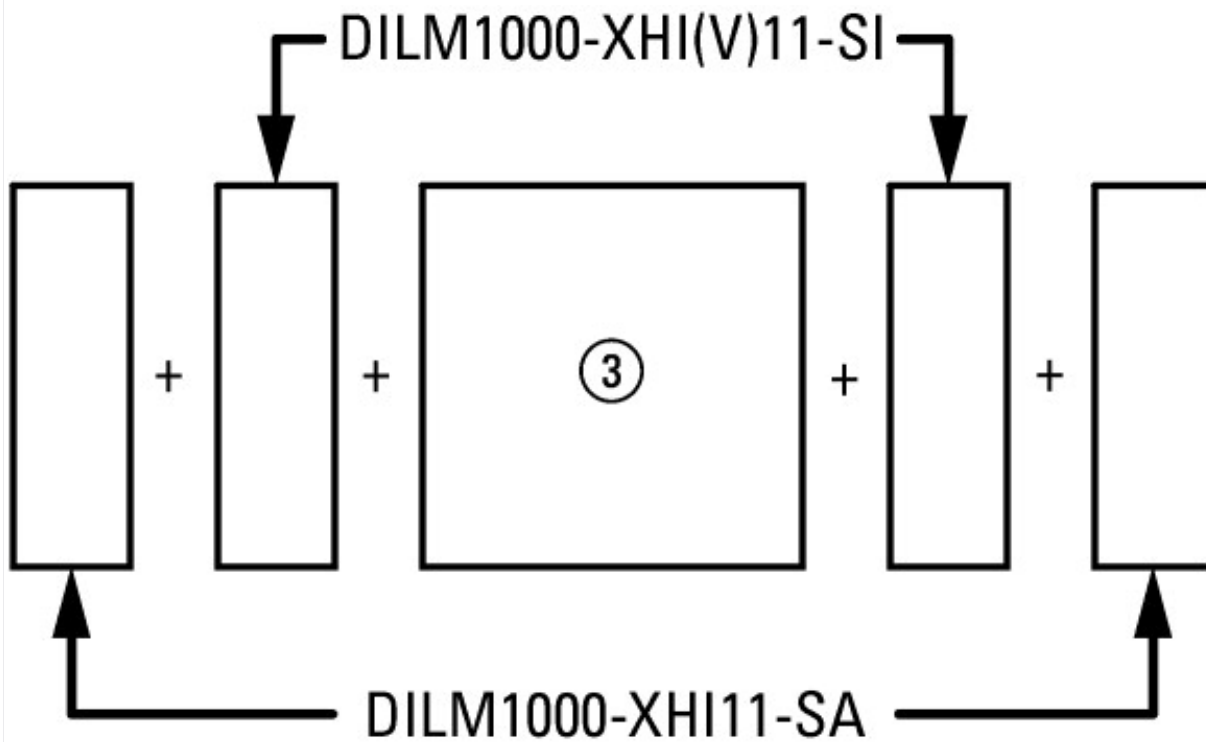


on the side: 2 x DILM820-XHI(V)11-SI; 2 x DILM820-XHI(V)11-SA
 on the side: 2 x DILM1000-XHI(V)11-SI; surface mounting: 1 x DILM150-XHIA22
 on the side: 2 x DILM1000-XHI(V)11-SI; surface mounting: 1 x DILM150-XHIA11
 on the side: 2 x DILM1000-XHI(V)11-SA; surface mounting: 1 x DILM150-XHI (4 pole)
 on the side: 2 x DILM1000-XHI(V)11-SA; surface mounting: 1 x DILM150-XHI (2 pole)

Characteristic curves

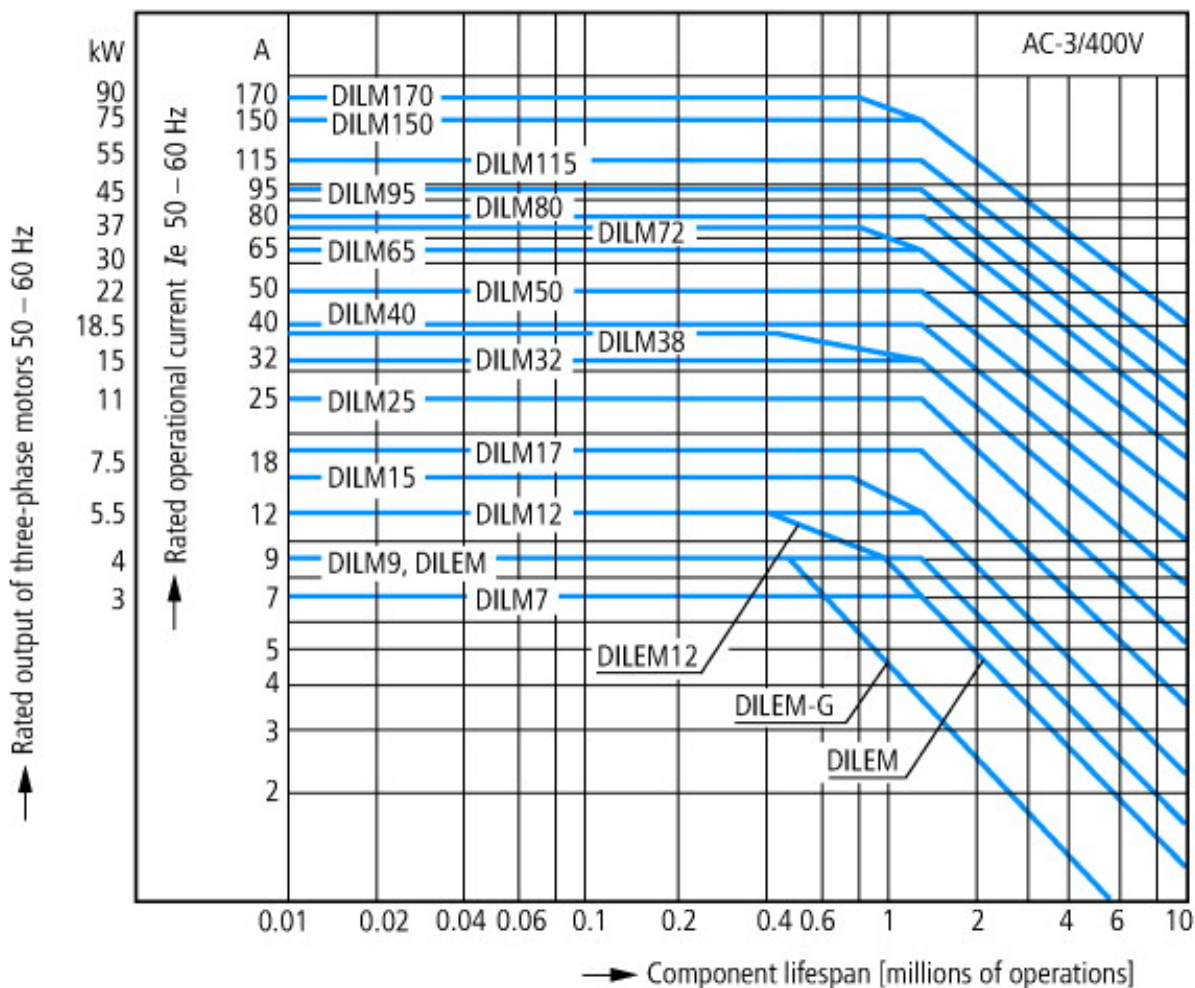


Squirrel-cage motor
 Operating characteristics
 Starting: from rest
 Stopping: after attaining full running speed
 Electrical characteristics
 Make: up to 6 x rated motor current
 Break: up to 1 x rated motor current
 Utilization category
 100 % AC-3
 Typical applications
 Compressors
 Lifts
 Mixers
 Pumps
 Escalators
 Agitators
 Fans
 Conveyor belts
 Centrifuges
 Hinged flaps
 Bucket-elevators
 Air conditioning system
 General drives in manufacturing and processing machines

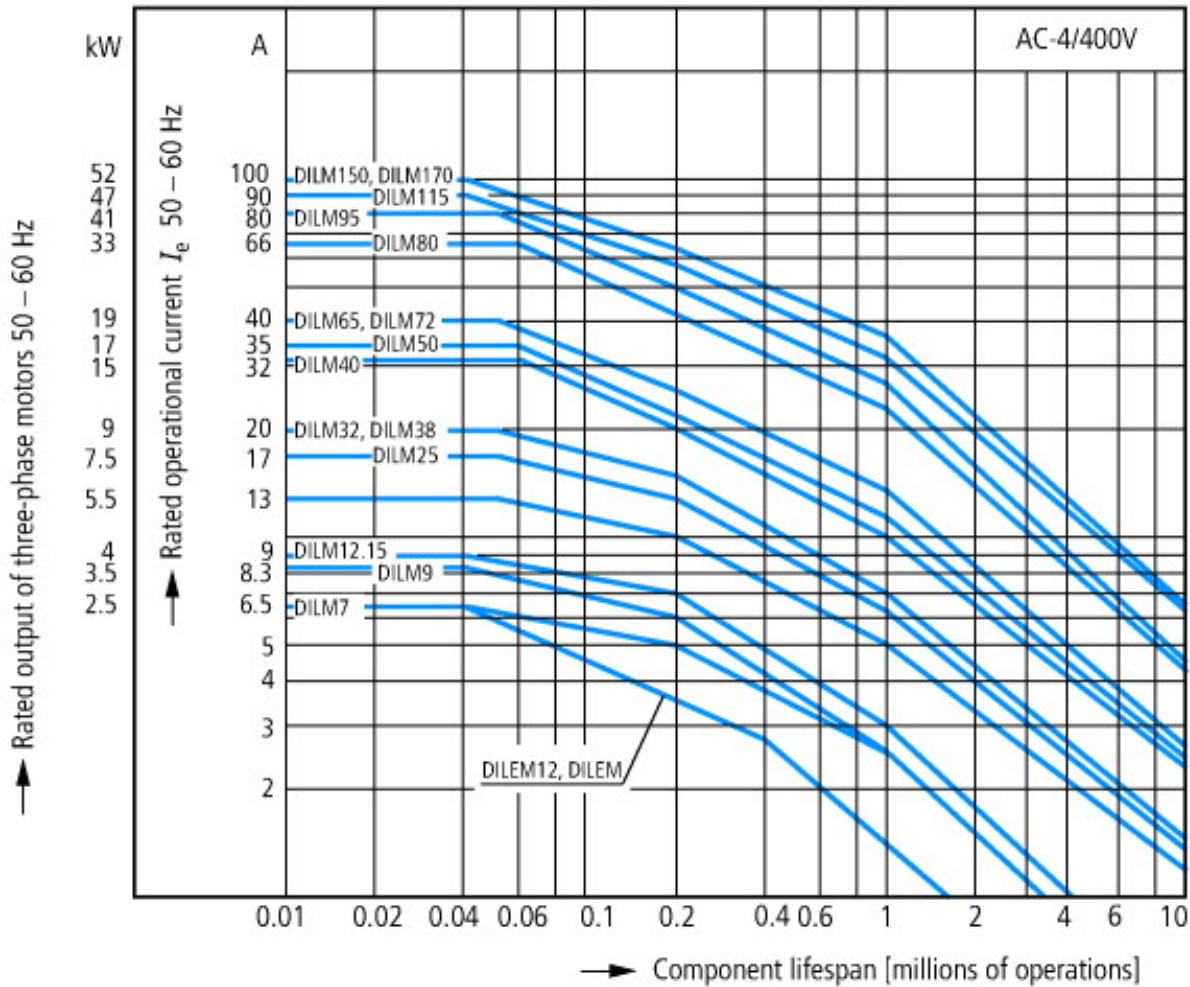


Extreme switching duty
 Squirrel-cage motor
 Operating characteristics
 Inching, plugging, reversing
 Electrical characteristics
 Make: up to 6 x rated motor current
 Break: up to 6 x rated motor current
 Utilization category
 100 % AC-4
 Typical applications
 Printing presses
 Wire-drawing machines
 Centrifuges
 Special drives for manufacturing and processing machines

Dimensions

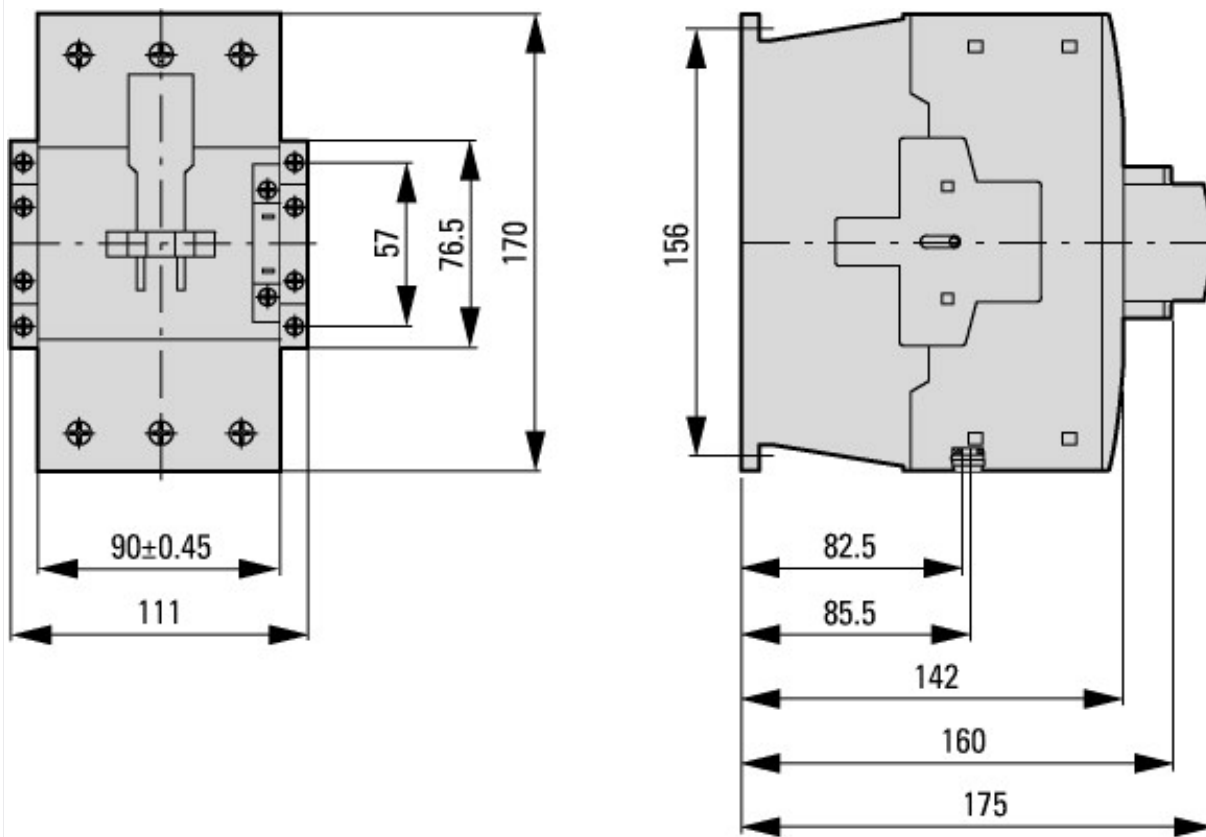

Contacteur with auxiliary contact module

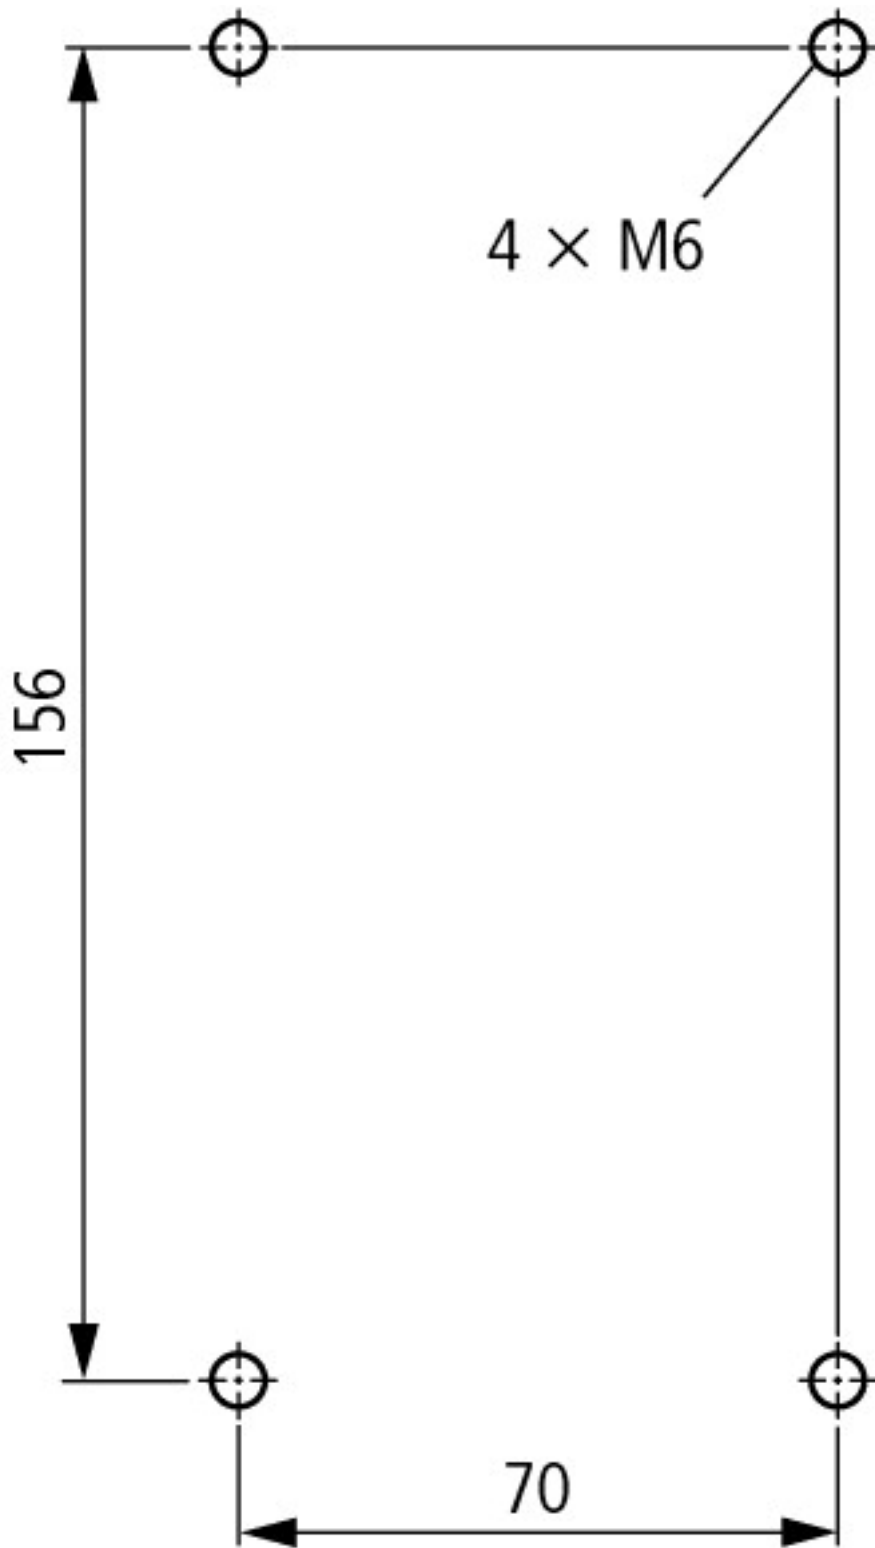

distance at side to earthed parts: 10 mm

DILM80...DILM170
DILMC80...DILMC150
DILMF80...DILMF150

Additional product information (links)

| IL03407039Z (AWA2100-2286) Contactors | |
|--|---|
| IL03407039Z (AWA2100-2286) Contactors | ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407039Z2010_10.pdf |
| UL/CSA: Approved rating data | http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&startpage=5.84 |
| UL/CSA: UL/CSA: Special Purpose Rating | http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&startpage=5.85 |
| UL/CSA: UL/CSA: Short Circuit Current Rating (SCCR) | http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&startpage=5.86 |
| Switchgear of Power Factor Correction Systems | http://www.moeller.net/binary/ver_techpapers/ver934en.pdf |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely | http://www.moeller.net/binary/ver_techpapers/ver938en.pdf |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions | http://www.moeller.net/binary/ver_techpapers/ver944en.pdf |
| Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors | http://www.moeller.net/binary/ver_techpapers/ver949en.pdf |
| Motor starters and "Special Purpose Ratings" for the North American market | http://www.moeller.net/binary/ver_techpapers/ver953en.pdf |
| Switchgear for Luminaires | http://www.moeller.net/binary/ver_techpapers/ver955en.pdf |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | http://www.moeller.net/binary/ver_techpapers/ver956en.pdf |
| The Interaction of Contactors with PLCs | http://www.moeller.net/binary/ver_techpapers/ver957en.pdf |
| Busbar Component Adapters for modern Industrial control panels | http://www.moeller.net/binary/ver_techpapers/ver960en.pdf |