

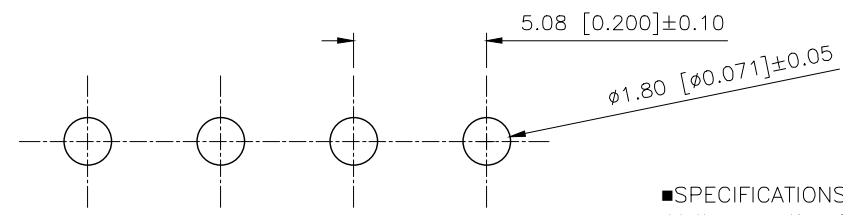
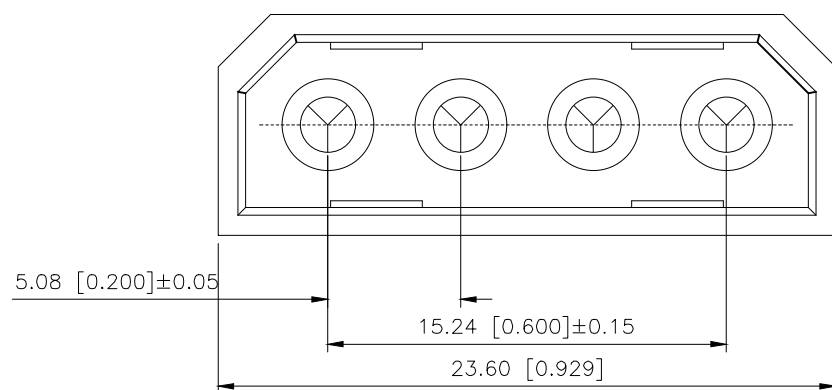


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A			2025.06.19	

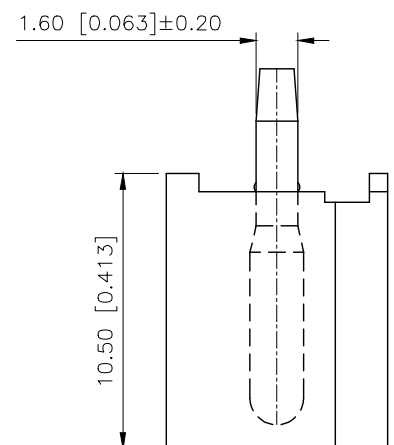

PCB LAYOUT

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:10A AC/DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - Material:Wafer PA66,UL94V-2
PIN Brass Tin-plated

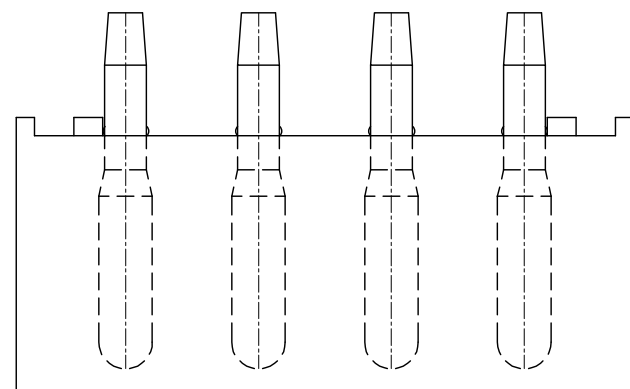

PART NO.:
X5050 W V-04-N2 SN XX

Series No
Category:W-Wafer
Welding Board Angle:V-Stright 180°
Row No.Pin No:XX-04Pin
Material:N2-PA66 UL94V-2
Planting:SN-Bright Tin Plating
Color Blank-Natural Color

X5050WV-04-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	X5050H
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	



DESIGN		VIEW:	MODEL TYPE: 5.08mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X5050WV-04-N2SN
APPROVED		SIZE: A4	DWG NO.: X-X5050WV-04-N2SN