
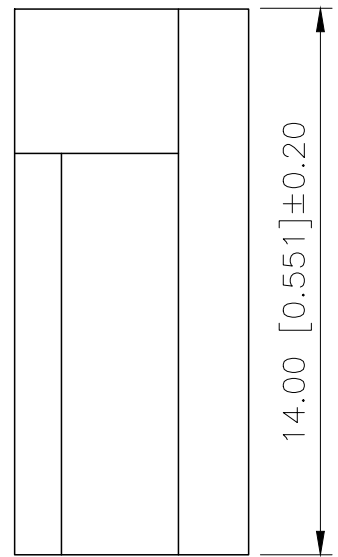


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.20	阿树

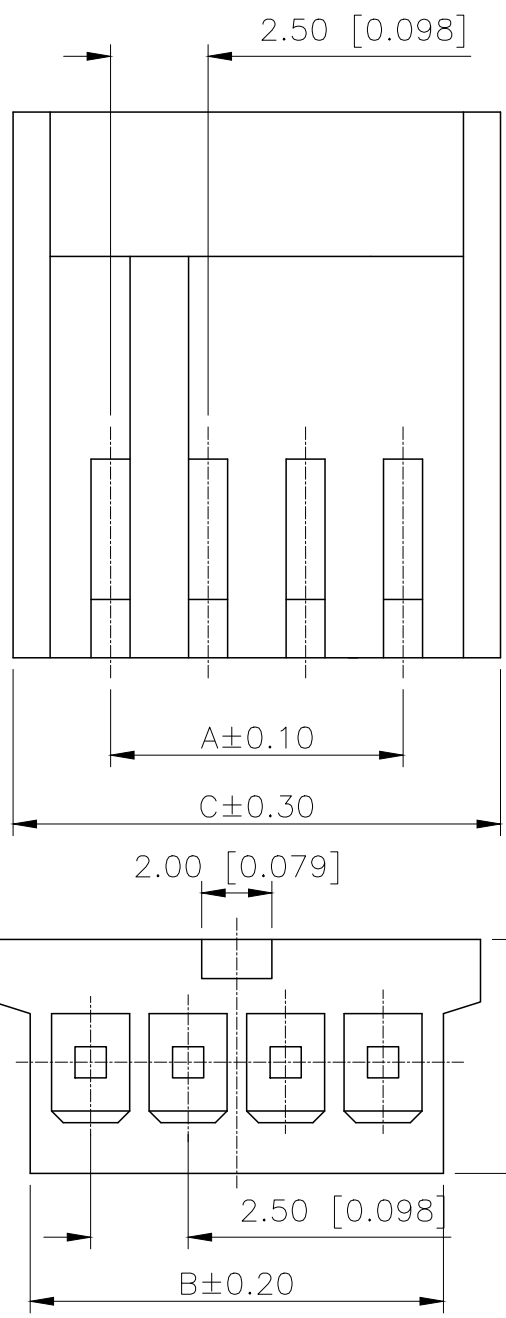

Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-40°C~+125°C
温度范围: -40°C~+125°C
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:20mΩ Max
接触电阻: 20mΩ Max

PART NO.:

X2511 H-XX-N0
① ② ③ ④

- ①Series No
- ②Category:H-HSG
- ③Row No.Pin No:XX-02~12Pin
- ④Material:N0-Nlon66 94V-0

Poles	Dimensions(mm)		
	A	B	C
02	2.50	5.60	7.30
03	5.00	8.10	9.80
04	7.50	10.60	12.30
05	10.00	13.10	14.80
06	12.50	15.60	17.30
07	15.00	18.10	19.80
08	17.50	20.60	22.30
09	20.00	23.10	24.80
10	22.50	25.60	27.30
11	25.00	28.10	29.80
12	27.50	30.60	32.30

X2511H-XX-N0	Nylon66	X2511W	X2511T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	2.5mm Crimp Style Connector
PART NO.:	X2511H-XX-N0
DWG NO.:	