


1

2

3

4

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.1.15	阿树

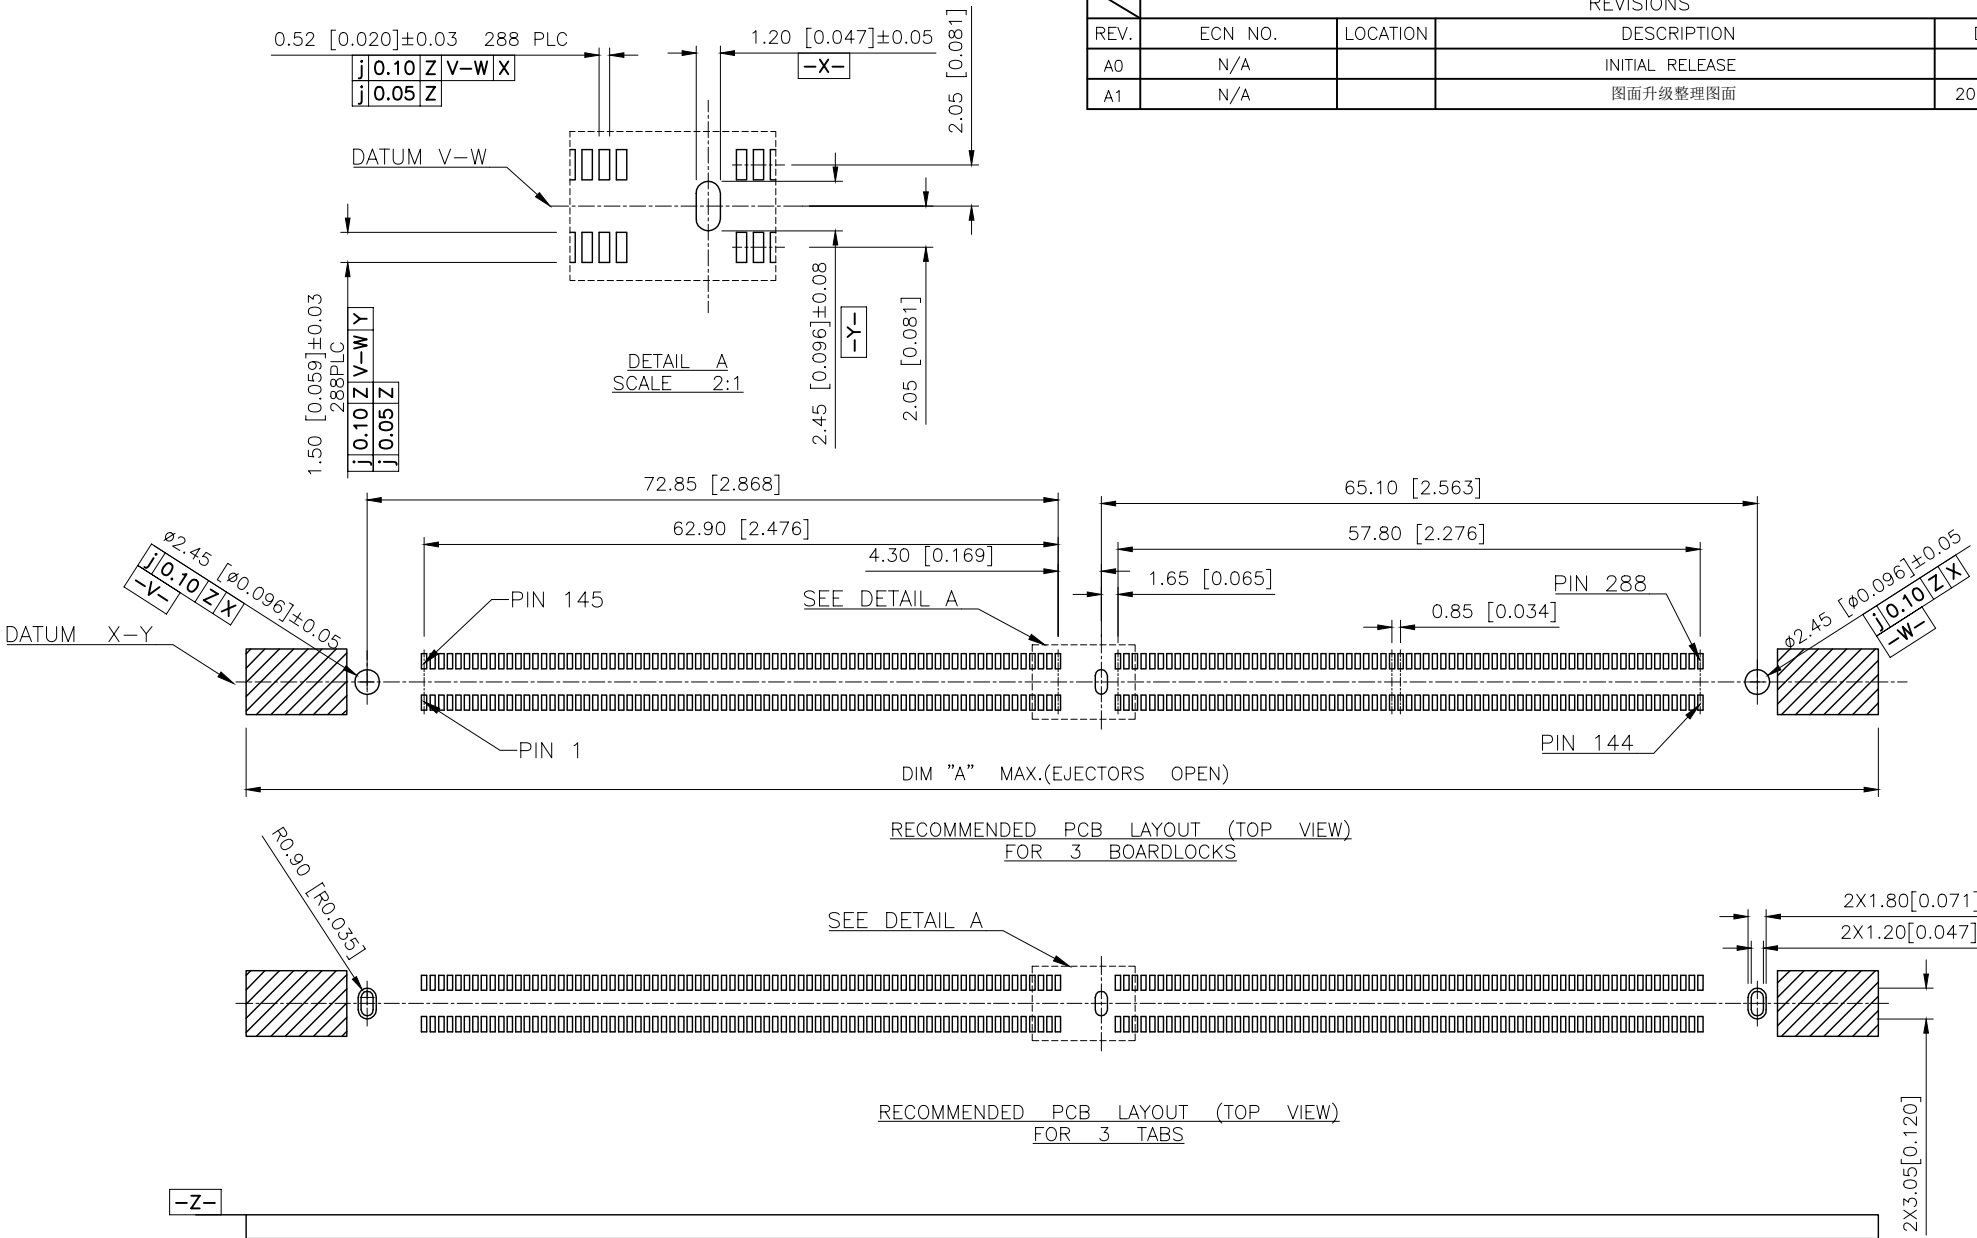

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	PART NO.: X9413WVS-288T2-9TV30
APPROVED		SIZE: A4	DWG NO.: X-X9413WVS-288T2-9TV30

SCALE	PAGE	REVISION
N/A	3/4	A1

1

2

3

4

1


2

3

4

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.1.15	阿树

A

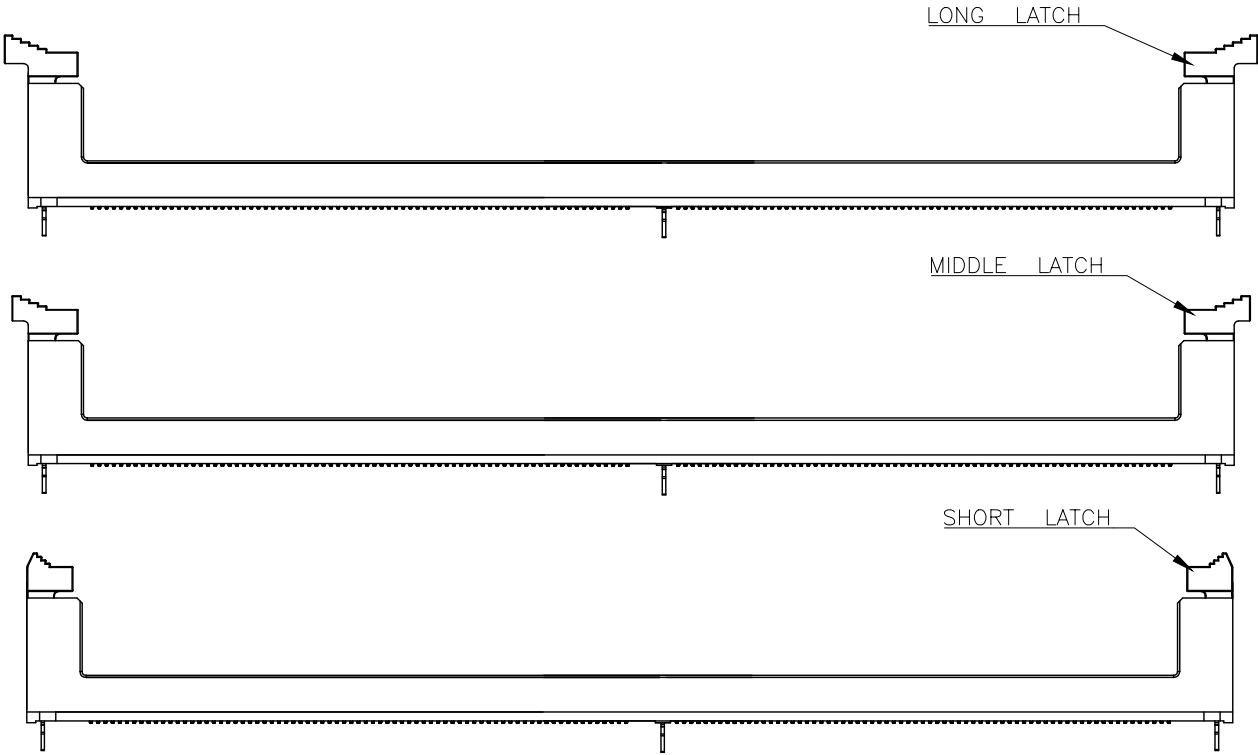

21.75	20.70	147.30	162.00	LONG
21.00	20.30	142.35	156.00	MIDDLE
20.50	20.20	140.80	152.00	SHORT
DIM.D	DIM.C	DIM.B±0.30	DIM.A	LATCH TYPE

PART NO.:

X9413 W V S-288 I 2-9T V30

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ①Series No
- ②Category:W—Wafer
- ③Welding Board Angle:V—Stright 180°
- ④Welding Way:S—SMT
- ⑤No.of Pins: XX—288 Pin
- ⑥Board Lock Type: B—Board Locks Type;T—TAB type
- ⑦Latch Type: 1.short latch;2.long latch;3.middle Latch
- ⑧latchPlastic material: PA46 /PA9T UL94V-0
- ⑨Contact Plating:V01—Gold Flash
V15—Gold 15u”
V30—Gold 30u”

C

- NOTES 注释:
- 1. MATERIAL材料:
 - 1.1 HOUSING外壳: HIGH PERFROMANCE RESINS, GLASS FILBER,UL94V-0;COLOR:SEE PART NO.
 - 1.2 LATCH锁: HIGH PERFROMANCE RESINS, GLASS FILBER, UL94 V-O, COLOR: SEE PART NO.
 - 1.3 CONTACTS触点: COPPER ALLOY.
 - 1.4 BOARDLOCK针脚: STAINLESS STEEL.
 - 1.5 TABS标签: STAINLESS STEEL.
 - 2. FINISH饰面:
 - 2.1 CONTACT触点:
[SEE PART NO..] GOLD PLATING ON THE CONTACT AREA.
2.54um [100u”] MIN. MATTE-TIN PLATING ON THE SOLDERING AREA
1.27um [50u”] MIN. NICKEL UNDERPLATING OVERALL.

D

AuGLAR	±5°		DESIGN	阿树	VIEW:	MODEL TYPE: /			
X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: X9413WVS-288T2-9TV30			
X.x	±0.30					DWG NO.: X-X9413WVS-288T2-9TV30	SCALE	PAGE	REVISION
X.xx	±0.20								
X.xxx	±0.15								
UNSPECIFIED TOLERAUCES		XKB INDUSTRIAL PRECISION CO.,LIMITED							
www.xk-dg.cn							N/A	4/4	A1

1

2

3

4