

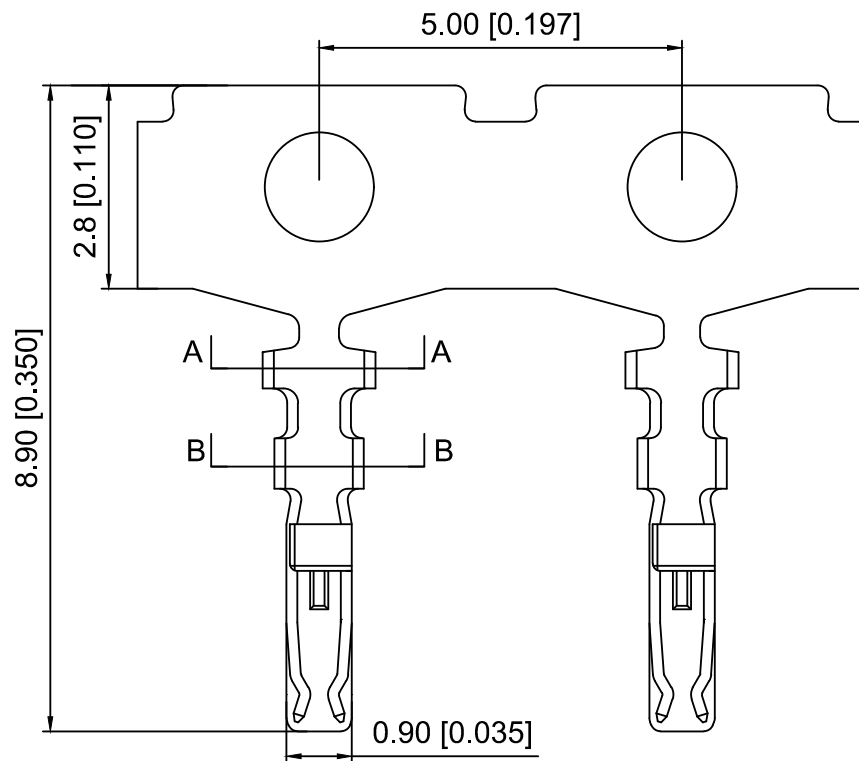
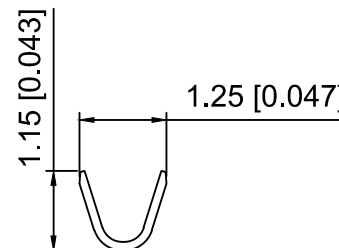
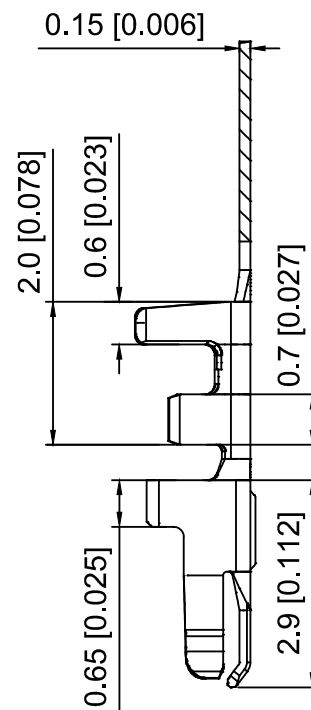


SEC:A-A



SEC:B-B



Specifications:

规格:

Voltage rating:50V AC/DC
 额定电压: 50V AC/DC
 Current rating:1.5A AC/DC
 额定电流: 1.5A AC/DC
 Withstanding voltage:500V AC/minute
 耐受电压: 500V AC/分钟
 Temperature range:-40℃-+125℃
 温度范围: -40℃-+125℃
 Insulation resistance:100MΩ min
 绝缘电阻: 100MΩ Min
 Contact resistance:20mΩ Max
 接触电阻: 20mΩ Max

X1256 T - P V01 - L
 ① ② ③ ④ ⑤

- 1.Series No
- 2.Category:T-Terminal
- 3.Material:P-Phosphor Bronze
- 4.Plating:V01-Gold Flash
SN-Plated Tin
- 5.Special No:L-Front buckle

X1256T-PV01-L	Phosphor Bronze	AWG#30~26	X1256H-L
PART NO	Material	Wire Range	Suitable XKB Housing

DSND		SCALE: N/A	MODEL TYPE: 1.25mm Crimp Style Connector		
DWN		VIEW: 	PART NO.: X1256T-PV01-L		
CHKD		UNIT: mm/in	DWG NO.: X-X1256T-PV01-L		
APPD		SIZE: A4			
PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED