
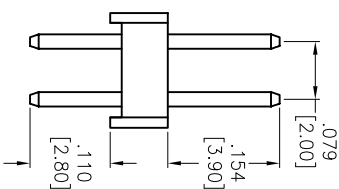
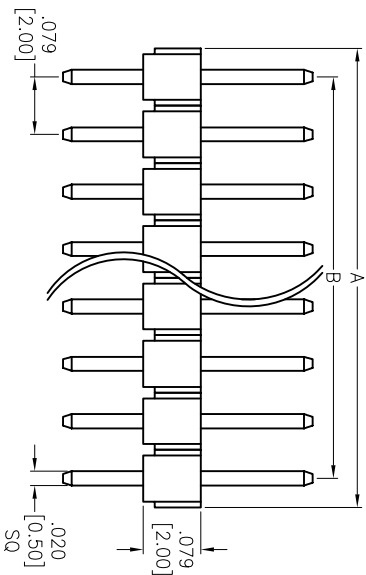
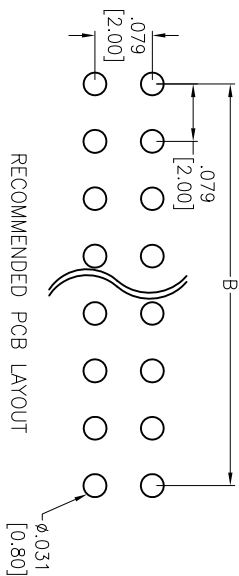


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/31/05	
A		REVISED DIM.	1/9/14	AY/TTW

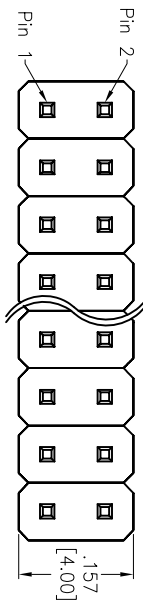

SPECIFICATIONS:

Material: Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 1 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant

Positions: 4 thru 80
A = .079 [2.00] x No. of Positions per Row
B = .079 [2.00] x No. of Spoces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
.X ± .10 .XX ± .020 .XXX ± .015	Ø.X ± .10 Ø.XX ± .015 Ø.XXX ± .010	TITLE :079 [2.00] DUAL ROW PIN HEADER GOLD PLATED	
APPROVALS		DATE	
DRAWN	SS	3/31/05	
CHECKED			
APPROVED			
		SIZE	PART NO.
		X	2PH2-XX-UA
		REF:	S00039T
		SCALE:	NTS
		SHEET	1 OF 1

