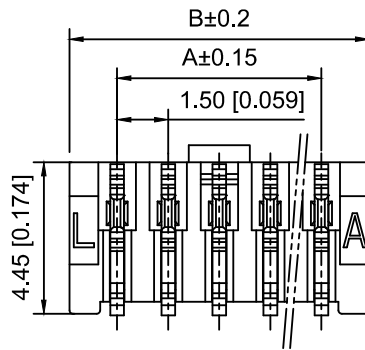
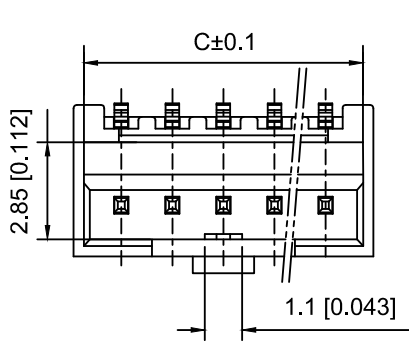




3D VIEWS

Specifications:  
规格:  
Voltage rating:350V AC/DC  
额定电压: 350V AC/DC  
Current rating:3A AC/DC  
额定电流: 3A AC/DC  
Withstanding voltage:500V AC/minute  
耐受电压: 500V AC/分钟  
Temperature range:-25℃~+85℃  
温度范围: -25℃~+85℃  
Insulation resistance: 1000MΩ min  
绝缘电阻: 1000MΩ Min  
Contact resistance:20mΩ Max  
接触电阻: 20mΩ Max


X1511 W R S- 11 L HF -LP SW  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle:R-Straight 90°
- 4.Welding Way: S-SMT
- 5.Row No.Pin No:XX-02P-15P
- 6.Special No:L-With lock
- 7.Special No:HF-Halogen Free
- 8.Material:LP-LCP UL94V-0
- 9.Plating; SW-Matte SN Plating

| Poles | DIM A | DIM B | DIM C |
|-------|-------|-------|-------|
| 02    | 1.50  | 4.30  | 3.70  |
| 03    | 3.00  | 5.80  | 5.20  |
| 04    | 4.50  | 7.30  | 6.70  |
| 05    | 6.00  | 8.80  | 8.20  |
| 06    | 7.50  | 10.30 | 9.70  |
| 07    | 9.00  | 11.80 | 11.20 |
| 08    | 10.50 | 13.30 | 12.70 |
| 09    | 12.00 | 14.80 | 14.20 |
| 10    | 13.50 | 16.30 | 15.70 |
| 11    | 15.00 | 17.80 | 17.20 |
| 12    | 16.50 | 19.30 | 18.70 |
| 13    | 18.00 | 20.80 | 20.20 |
| 14    | 19.50 | 22.30 | 21.70 |
| 15    | 21.00 | 23.80 | 23.20 |

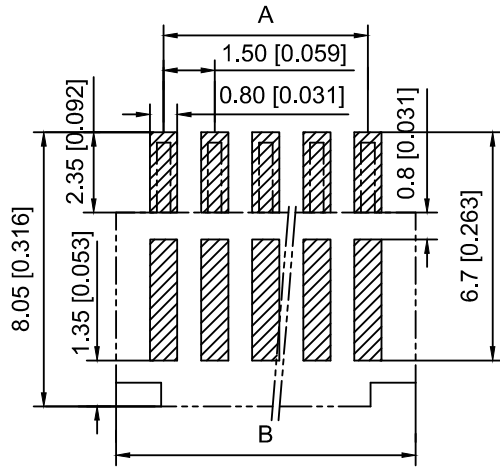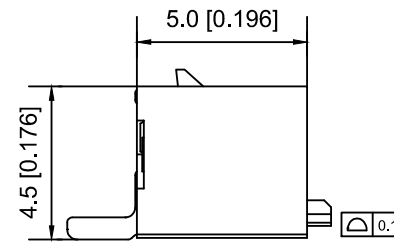

Recommended PCB Layout

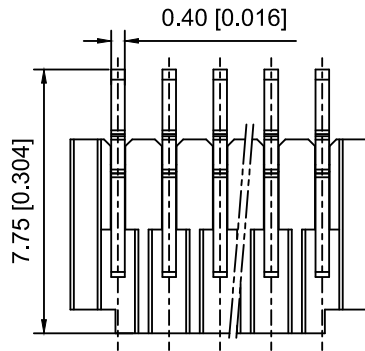

|                     |          |                 |         |                      |
|---------------------|----------|-----------------|---------|----------------------|
| X1511WRS-11LHF-LPSW | LCP      | Phosphor Bronze | Tin     | X1511H-L             |
| PART NO             | Material | Material(Pin)   | Plating | Suitable XKB Housing |

|      |  |             |                                            |
|------|--|-------------|--------------------------------------------|
| DSND |  | SCALE: N/A  | MODEL TYPE:<br>1.5mm Crimp Style Connector |
| DWN  |  | VIEW:       | PART NO.:<br>X1511WRS-11LHF-LPSW           |
| CHKD |  | UNIT: mm/in | DWG NO.:<br>X-X1511WRS-11LHF-LPSW          |
| APPD |  | SIZE: A4    |                                            |

|                                                     |             |      |         |          |                        |      |
|-----------------------------------------------------|-------------|------|---------|----------|------------------------|------|
|                                                     |             |      |         |          | ANGLAR                 | ±5°  |
| Δx                                                  |             |      |         |          | L≤ 4                   | ±0.2 |
| Δx                                                  |             |      |         |          | 4<L≤ 16                | ±0.3 |
| Δx                                                  |             |      |         |          | 16<L≤ 63               | ±0.4 |
| MARK                                                | DESCRIPTION | DATE | REVISED | APPROVED | L> 63                  | ±0.5 |
| REVISIONS                                           |             |      |         |          | UNSPECIFIED TOLERANCES |      |
| www.helloxkb.com    www.helloxkb.cn    www.xk-dg.cn |             |      |         |          |                        |      |

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

| WEIGHT | SHEET | REVISION |
|--------|-------|----------|
|        | 1/1   | A0       |