

1






2

3


4

REVISIONS


REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树

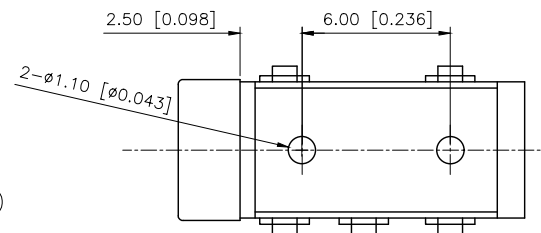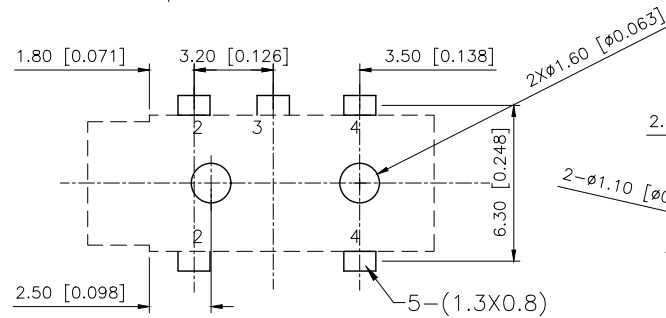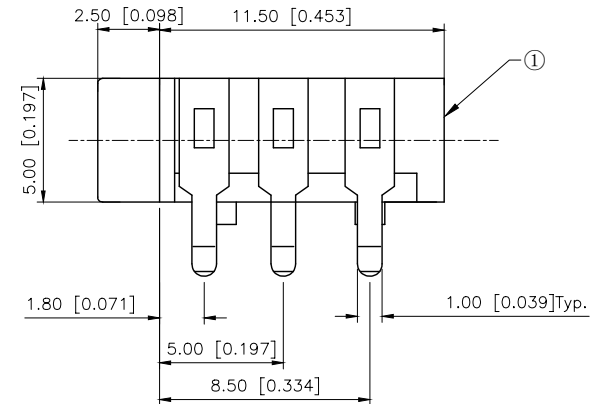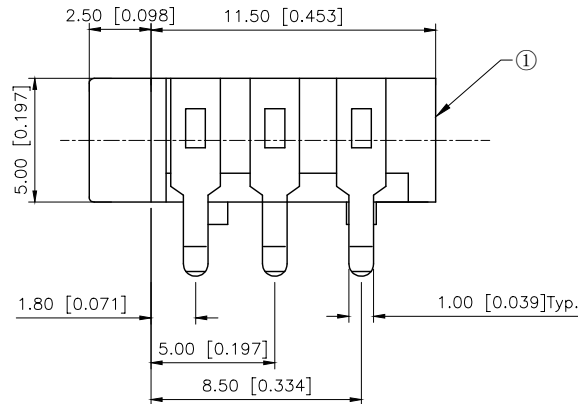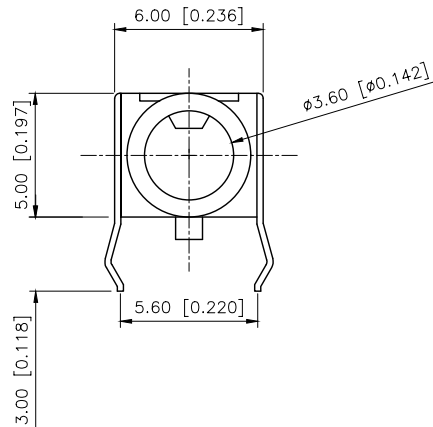

PJ-3135-X

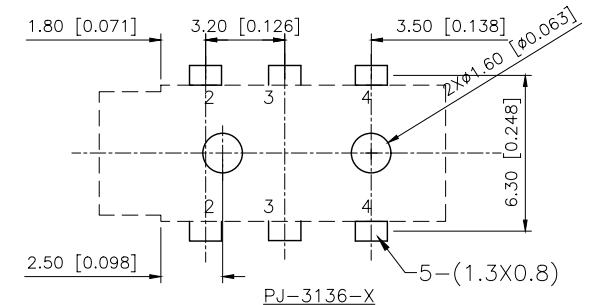

PJ-3136-X

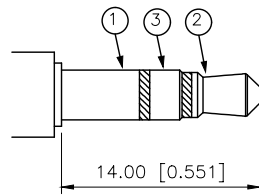

ø3.50 MATE PLUG

SPECIFICATION

- 1.Rating: DC 30V 0.5A
- 2.Contact resistance: $\leq 30\text{m}\Omega$
- 3.Insulation resistance: $\geq 100\text{m}\Omega$
- 4.Withstand voltage: 500VAC
- 5.Insertion and extraction force: 3-20N
- 6.life test: 5,000 cycles

Model No.	PJ-3135-X	PJ-3136-X
Schematic		
Color	R:red G: Green W:white B:Black Y:Yellow T:transparent	

Plastic	PBT	
Terminal 4	Phosphor Bronze	TIN
Terminal 3	Phosphor Bronze	TIN
Terminal 2	Phosphor Bronze	TIN
PAPT NAMF	MATERIAL	PLATING

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-3135-Y
APPROVED		SIZE: A4	DWG NO.: X-PJ-3135-Y
XKB INDUSTRIAL PRECISION CO.,LIMITED		SCALE	PAGE
		N/A	1/1
		REVISION	A1

1

2

3

4