










RoHS
Compliant

ZONE	ECN.N.O.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生財	2023.10.24




NOTES

1. CURRENT RATING: 24V & 5A MAX.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3N MIN.
7. CONNECTOR UNMATING FORCES: 35N MAX.
8. OPERATING TEMPERATURE: -25°C TO +85°C.

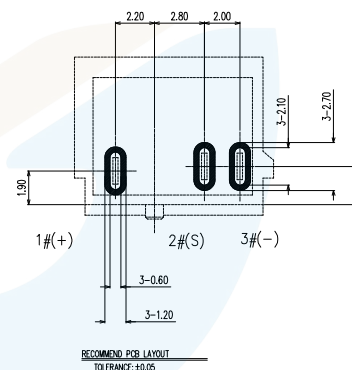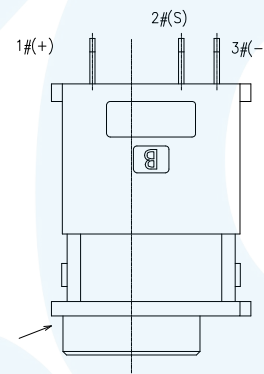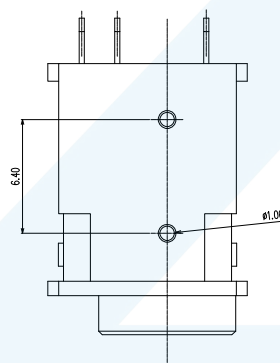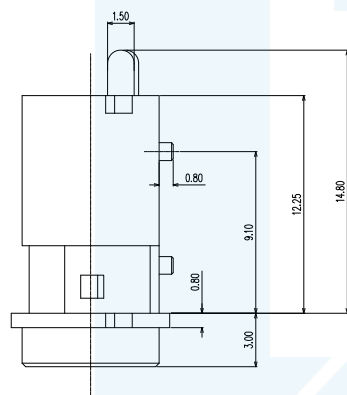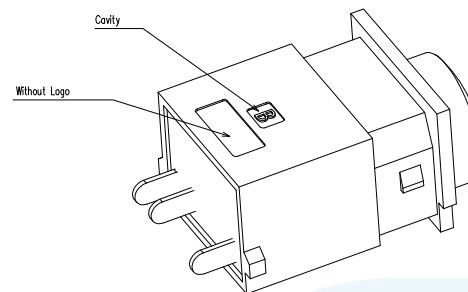


WHITE WATERPROOF RING

Not to install the waterproof ring shipment

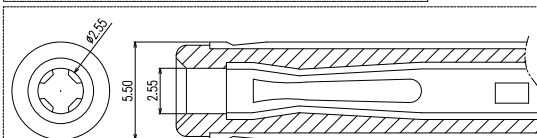

Circuit Diagram



7	WATERPROOF RING	1	SILICONE; WHITE
6	GLUE	1	EPOXY; BLACK
5	BACK COVER	1	HIGH TEMPERATURE; BLACK
4	HOUSING	1	HIGH TEMPERATURE; BLACK
3	TERMINAL 3#	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON SOLDER AREA
2	TERMINAL 2#	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON THE WHOLE
1	CENTER PIN	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON SOLDER AREA
ITEM	NAME	Q'TY	DESCRIPTION

LZG

LZG INDUSTRIAL CO. LTD

DRAWING:	林生財	DATE:	2023.10.24	SCALE	1:1
CHECK:	李宏鑫	DATE:	2023.10.24	MATERIAL	*
APPROVAL:	楊維安	DATE:	2023.10.24	DWG. NO.	
DRAWING NO.	ZB30014-03DBAP-A			SHEET	1/1

PART NAME	Ø2.50 DC WATERPROOF POWER JACK
PART NO.	ZB30014-03DBAP-A

TOLERANCE UNLESS OTHERWISE SPECIFIED:	0.0±0.25 0.00±0.15 0.000±0.10	0.°±2° 0.0°±1° 0.00°±0.5°
---------------------------------------	-------------------------------------	---------------------------------

UNIT:	mm
-------	----

