
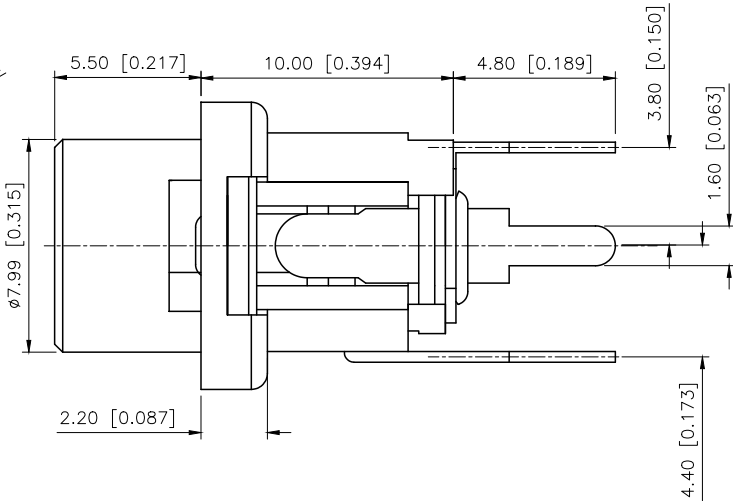


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.07.21	阿树

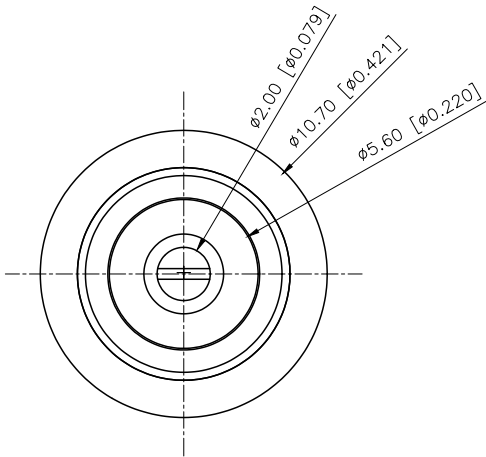

Main technical performance

主要技术性能

Rated electric load: DC 30V \ 5.0A

额定电负荷 DC 30V\5.0A

Contact resistance $\leq 30m\Omega$

接触电阻 $\leq 30m\Omega$

Insulation resistance $\geq 100M\Omega$

绝缘电阻 $\geq 100M\Omega$

Withstand voltage AC500V (50Hz) / min

耐压 AC500V(50Hz)/min

Insertion force: 3-20N



插拔力 3-20N

Operating temperature range: - 30-70 °C

使用温度范围 -30-70°C

Service life: 5000 times

使用寿命 5000次

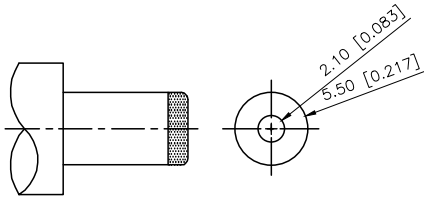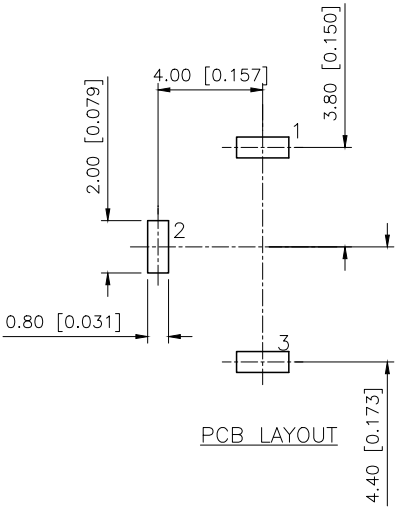

MATING PLUG
Jack Insertion Depth: 9.0 mm

SCHEMATIC	
Model	DC-026-5A
Center Pin	$\phi 2.0$ mm
	$\phi 2.5$ mm

Terminal 3	Phosphor Bronze	Tin
Terminal 2	Brass	Tin
Terminal 1	Brass	Tin
Center pin	Brass	Tin
Plastic	PBT	
Axle sleeve	Brass	Tin
PAPT NAMF	MATERIAL	PLATING

AuGLAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: DC POWER JACK
CHECKED		UNIT: mm/in	PART NO.: DC-026-5A-2.0
APPROVED		SIZE: A4	DWG NO.: