

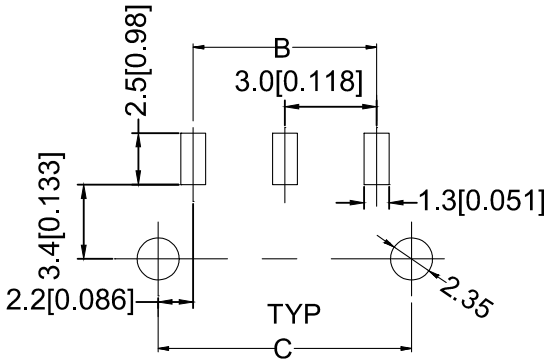
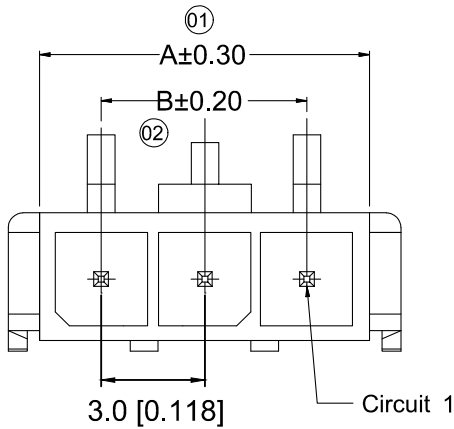


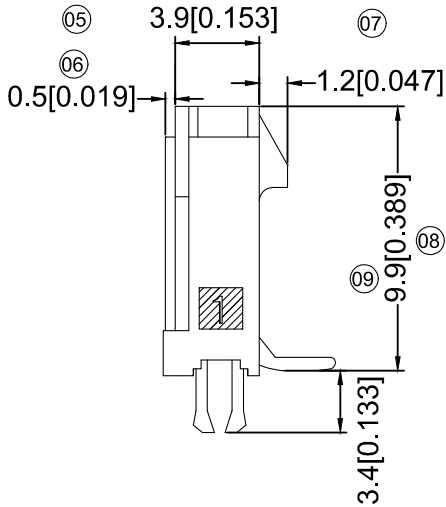

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M \Omega$
- Contact resistance: $\leq 10m \Omega$
- After environmental testing : $\leq 20m \Omega$
- Mark "*"Indicate Dimensions Need To Controlled In Emphasis

P.C.B. LAYOUT

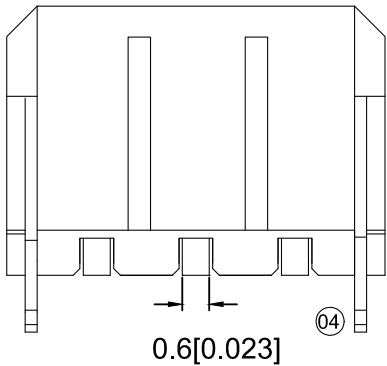

X3025 W V S- 05 C-LPSW

01 02 03 04 05 06 07 08 09

- 01 Series No.
02 Category :
W-wa fer
03 Welding Board Angle:
V-180°
04 Welding Way:
S-SMT
05 Row No.-Pin No.
XX-Single row
06 Special NO.
C-The ha fPoon
07 Material:
LP-LCP 94V-0 66-PA66 94V-0
08 Planting Category:
V**All Gold-Plated
G**Gold-Plated Contact
*01-Gold Flash ; *02-2U" ; *03-3U" ; *05-5U"
*10-10U" ; *15-15U" ; *30-30U" ; *50-50U"
SN-Bright tin plating 70U"
SN1-Bright tin plating 120U"Min. ;
SW-Fog Tin plating
09 Color:
Blank-natural color

Poles	Dimensions (mm)		
	A	B	C
02	6.85	3.00	7.30
03	9.85	6.00	10.30
04	12.85	9.00	13.30
05	15.85	12.00	16.30
06	18.85	15.00	19.30
07	21.85	18.00	22.30
08	24.85	21.00	25.30
09	27.85	24.00	28.30
10	30.85	27.00	31.30
11	33.85	30.00	34.30
12	36.85	33.00	37.30

X3025 WVS-05C-LPSW	LCP UL 94V-0	Brass	Tin Plating Fog	Brass	Tin-Plated	X3025H
X3025WVS-05C-66SN	PA66 UL 94V-0	Brass	Tin-Plated	Brass	Tin-Plated	X3025H
PART NO	Material	Material(pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With XKB Housing

							DSND		DATE		SCALE: N/A	MODEL TYPE: 3.00 mm Crimp Style Connectors		
				XKB	ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.: X3025WVS-05C-LPSW		
Δx					L ≤ 4	±0.2	CHKD		DATE		UNIT: mm/in	DWG NO.: X-X3025WVS-05C-LPSW		
Δx					4<L ≤ 16	±0.3								
Δx					16<L ≤ 63	±0.4								
MARK	DESCRIPTION			DATE	REVISED	APPROVED	APPD		DATE		SIZE: A4			
REVISIONS							UNSPECIFIED TOLERANCES					XKB INDUSTRIAL PRECISION CO.,LIMITED		
www.helloxkb.com														
												WEIGHT	SHEET	REVISION
												1.0g	1/1	A0

				XKB	ANGLAR	±5°
Δx					L ≤ 4	±0.2
Δx					4<L ≤ 16	±0.3
Δx					16<L ≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com						