

High Sensitivity Micropower Omnipolar Hall-effect Switch

Features

- High sensitive omnipolar operation
- Micropower operation Typ 0.8 μ A
(average : $V_{DD}=1.8V$)
- Ultra small package:
FCDFN 0.8mmX0.8mm-4L
- On board voltage regulator for 1.6V to 5.5V range
- Magnetic threshold options:
 $B_{op}=\pm 25Gs$, $B_{rp}=\pm 18Gs$
- Wide operating temperature range:
 $-40^{\circ}C$ to $85^{\circ}C$

Applications

- Smartphone.
- Notebook computer.
- Handheld gaming consoles.
- Bluetooth headset.
- DV.
- Contact-less switch, Level, proximity and position switches in consumer products.

General Description

The AW86511EBCFDR device is an ultra-low-power switch Hall effect sensor with internal pull up and pull down capability, designed for the most compact and battery-sensitive systems. The supply range of AW86511EBCFDR is 1.6V to 5.5V to support portable equipment. To minimize PCB space, the AW86511EBCFDR have ultra small packages: FCDFN 0.8mmX0.8mm-4L


When the magnetic field strength is greater than B_{op} , then the device output is pulled low; When the magnetic field strength is less than B_{rp} , then the device output is pulled high; When the magnetic field strength is between B_{op} and B_{rp} , then the device output remains in the previous state.

Typical Application Circuit




Pin Configuration And Top Mark

AW86511EBCFDR
(Top View)

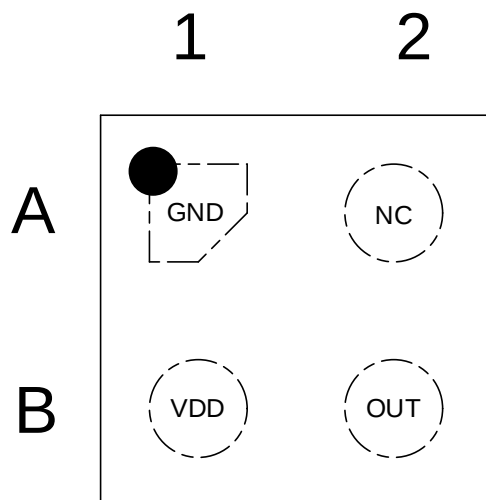

AW86511EBCFDR Marking
(Top View)

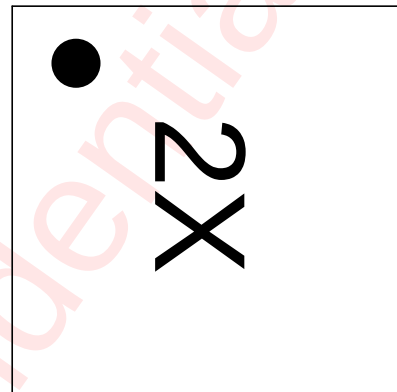


2 – AW86511EBCFDR
X – Production Tracing Code

Pin Definition

NO.	Name	Description
A1	GND	Ground
A2	NC	Not Connect, Chip internal short to GND for test
B1	VDD	Power Supply
B2	OUT	Output (Detect the South&North pole)

Functional Block Diagram

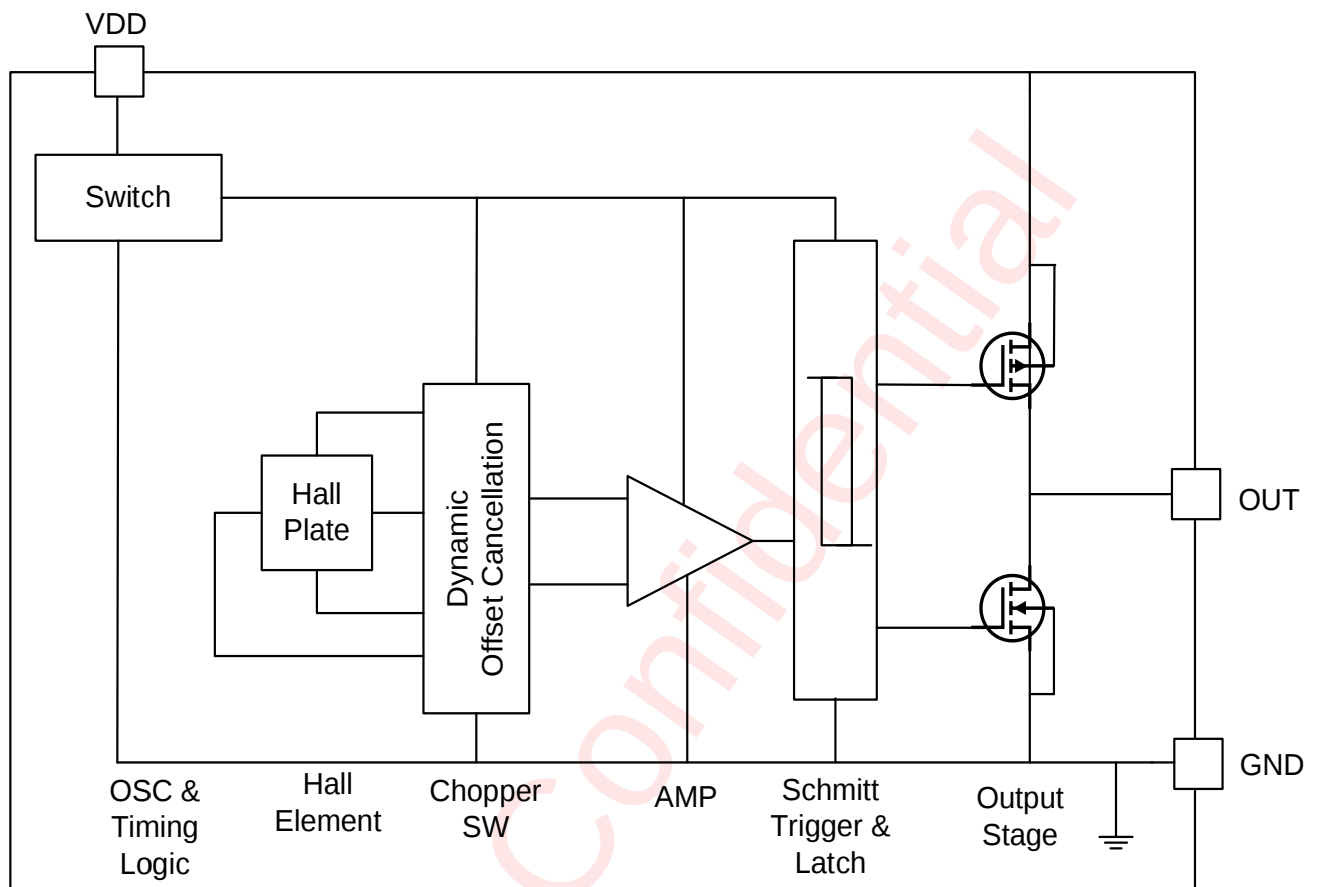

Ordering Information

Part Number	Temperature	Package	Marking	Moisture Sensitivity Level	Environmental Information	Delivery Form
AW86511EBCFDR	-40°C~85°C	FCDFN 0.8mmX0.8mm-4L	2	MSL1	ROHS+HF	4500 units/ Tape and Reel

Absolute Maximum Ratings (Note1)

PARAMETERS	RANGE
Supply Voltage	-0.3V to 6V
Supply Current	4mA
Output Voltage	-0.4V to $V_{DD}+0.4V$
Output Current	4mA
Operating Ambient Temperature T_A	-40°C to 85°C
Storage Temperature T_{STG}	-65°C to 150°C
Junction temperature T_J	-50°C to 165°C
Magnetic Flux	No limit
Lead temperature (soldering 10 seconds)	260°C
ESD Rating(Note2 3)	
Human Body Model (HMB) ESD capability	±6kV
Charged-device model (CDM) ESD capability	±1.5kV
Latch-up	
Test Condition: JESD78E	+IT: 200mA
	-IT: 200mA

Note1: Conditions out of those ranges listed in "absolute maximum ratings" may cause permanent damages to the device. In spite of the limits above, functional operation conditions of the device should within the ranges listed in "recommended operating conditions". Exposure to absolute-maximum-rated conditions for prolonged periods may affect device reliability.

Note2: The human body model test method: ESDA/JEDEC JS -001-2017.

Note3: Charge Device Model test method: ESDA/JEDEC JS-002-2018.

Electrical Characteristics

$V_{DD} = 3.3V$, $T_A = 25^\circ C$ for typical values (unless otherwise noted)

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
V_{DD}	Supply Voltage	Operating, $T_J < 165^\circ C$	1.6	-	5.5	V
$I_{DD}(\text{awake})$ (Note1)	Supply Current	During awake period, $T_A = 25^\circ C$, $V_{DD} = 3.3V$	-	0.95	1.3	mA
$I_{DD}(\text{sleep})$		During sleep period, $T_A = 25^\circ C$, $V_{DD} = 3.3V$	-	0.43	0.8	μA
$I_{DD}(\text{avg})$ (Note1)	Average supply current	$T_A = 25^\circ C$, $V_{DD} = 1.8V$, $f_s = 20Hz$	-	0.8	-	μA
		$T_A = 25^\circ C$, $V_{DD} = 3.3V$, $f_s = 20Hz$	-	-	1.7	μA
V_{OL}	Output low voltage(on)	$I_{OUT} = 1\text{ mA}$	-	0.1	0.2	V
V_{OH}	Output high voltage(off)	$I_{OUT} = -1mA$	$V_{DD}-0.2$	$V_{DD}-0.1$	-	V
T_{awake} (Note1)	Awake time	(Note)	-	40	60	μs
T_{period}	Period	$f_s = 20Hz$ (sampling rate)		50	75	ms
D.C.	Duty cycle	-	-	0.08	-	%
f_c	Chopping Frequency	-	-	500	-	kHz
I_{OFF} (Note1)	Output Leakage Current	$V_{OUT} = 5.5\text{ V}$; Switch state=off	-	-	0.1	μA

Note1: Minimum and/or maximum limit is guaranteed by design and by statistical analysis of device characterization data. The specification is not guaranteed by production testing.


Magnetic Characteristics

$T_A=25^{\circ}\text{C}$, $V_{DD}=3.3\text{V}$ for typical values (unless otherwise noted)


(1mT = 10Gauss)

Symbol	Characteristics	Test condition	Min	Typ	Max	Unit
Bops (south pole to part marking side)	Operation Point	$T_A = 25^{\circ}\text{C}, V_{DD}=3.3\text{V}$	12	25	32	Gauss
Bopn (north pole to part marking side)		$T_A = 25^{\circ}\text{C}, V_{DD}=3.3\text{V}$	-32	-25	-12	
Brps (south pole to part marking side)	Release Point	$T_A = 25^{\circ}\text{C}, V_{DD}=3.3\text{V}$	9	18	25	
Brpn (north pole to part marking side)		$T_A = 25^{\circ}\text{C}, V_{DD}=3.3\text{V}$	-25	-18	-9	
Bhy ($ B_{opx} - B_{rpx} $)	Hysteresis	$T_A = -40^{\circ}\text{C to } 85^{\circ}\text{C}$ $V_{DD} = 1.6\text{V}\sim 5.5\text{V}$	-	7	-	


Typical Characteristics

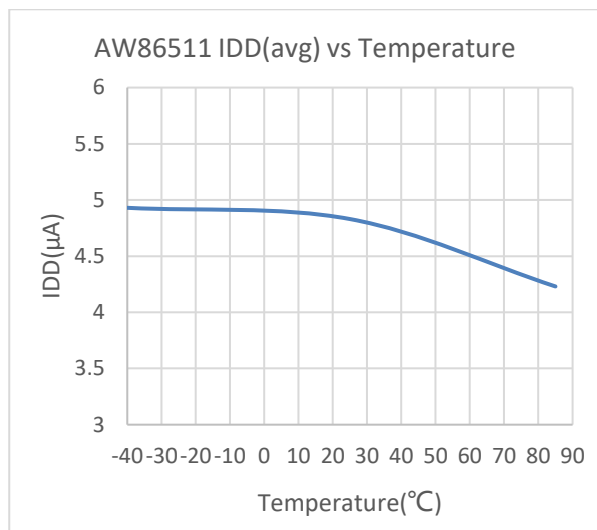


Ambient Temperature T_a [°C] I_{DD} vs. T_a
 $V_{DD}=1.8V$

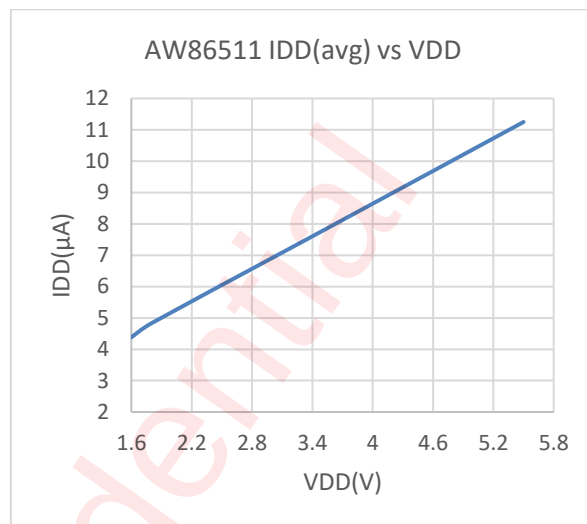

Average Supply Current vs. Supply Voltage
 $T_a=25^{\circ}C$

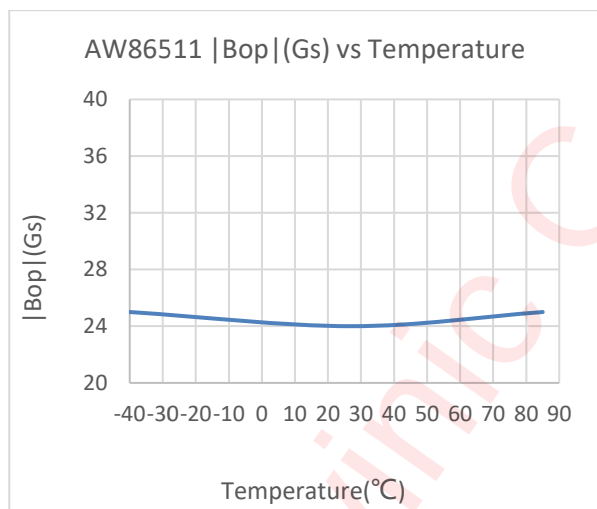

Ambient Temperature T_a [°C] |Bop| vs. T_a
 $V_{DD}=3.3V$

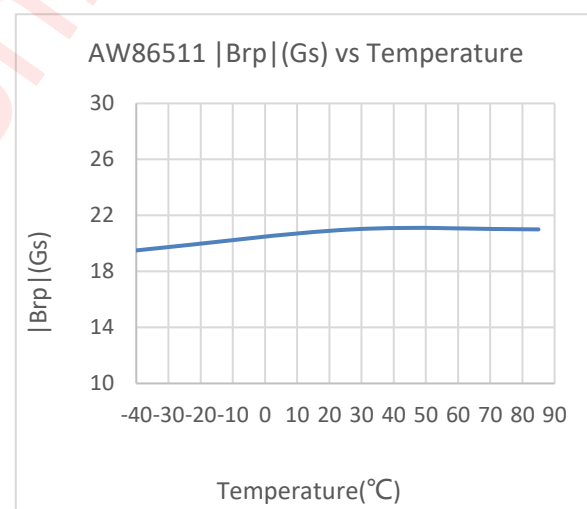


Ambient Temperature T_a [°C] |Brp| vs. T_a
 $V_{DD}=3.3V$



Detailed Functional Description

Magnetic Response

When the magnetic field strength is greater than B_{opn} , then the device output is pulled low; When the magnetic field strength is less than B_{rpn} , then the device output is pulled high; When the magnetic field strength is between B_{opn} and B_{rpn} , then the device output remains in the previous state.

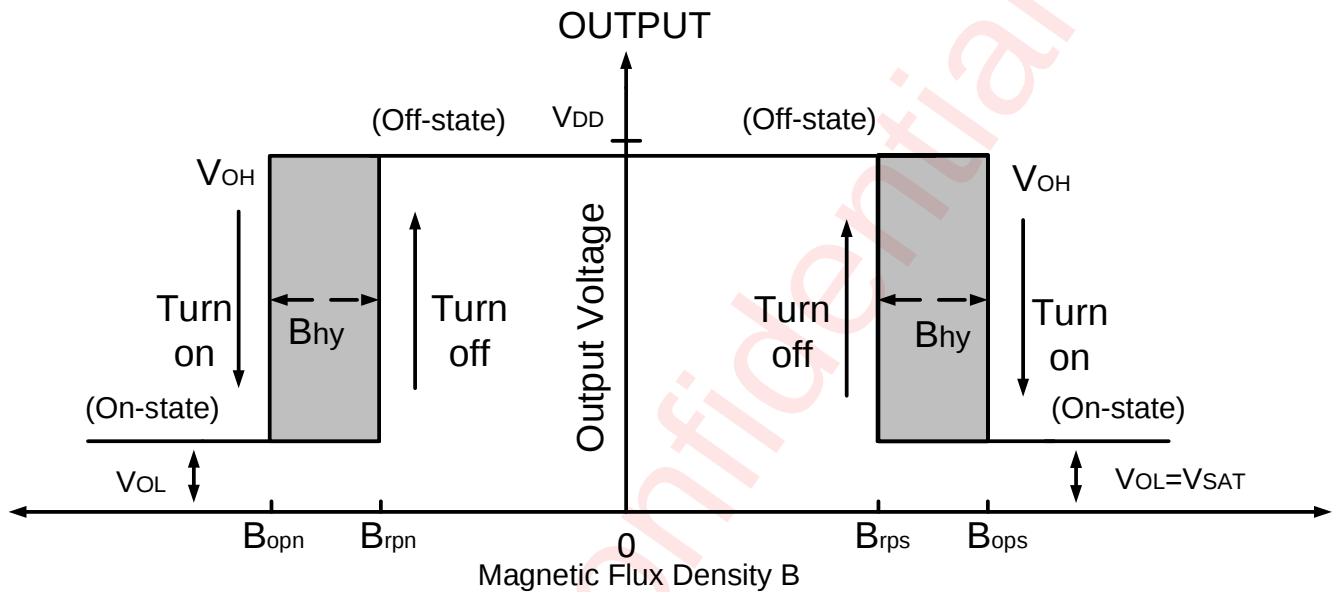

Tape And Reel Information

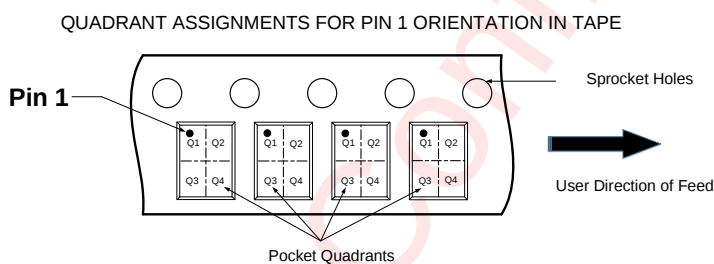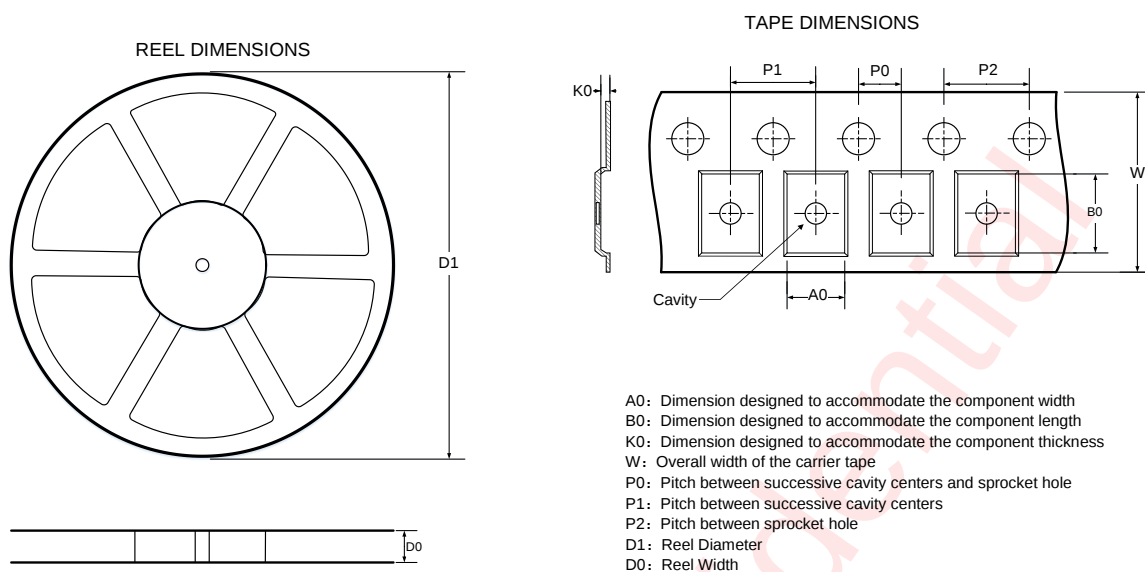




Note: The above picture is for reference only. Please refer to the value in the table below for the actual size

DIMENSIONS AND PIN1 ORIENTATION

D1 (mm)	D0 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
178.0	8.40	0.91	0.91	0.66	2.00	4.00	4.00	8.00	Q1


All dimensions are nominal

Package Description

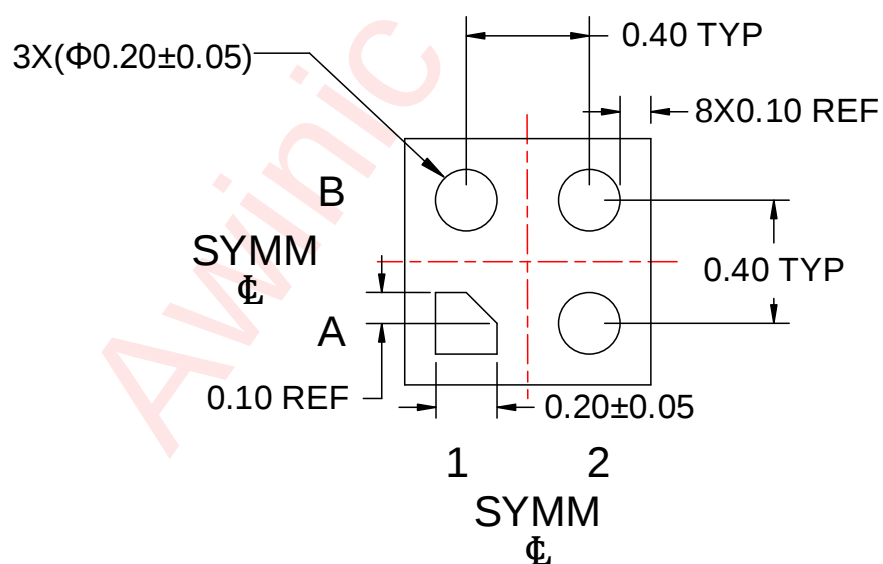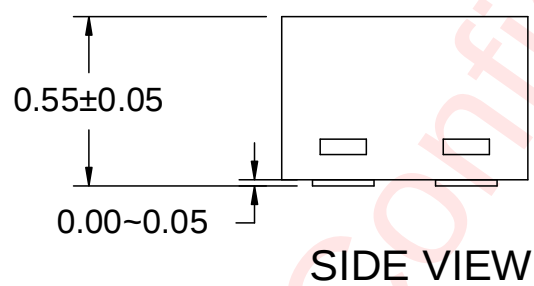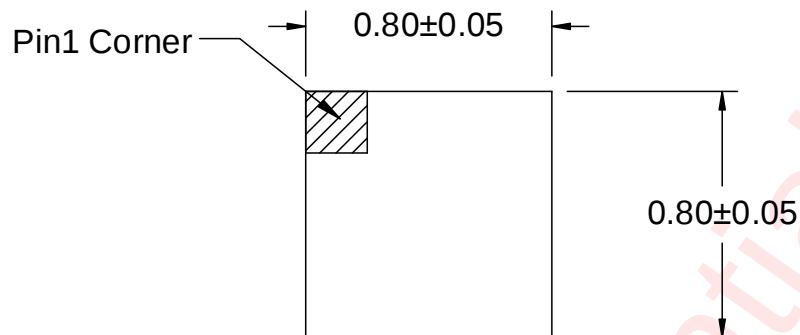

Unit:mm

Land Pattern Data

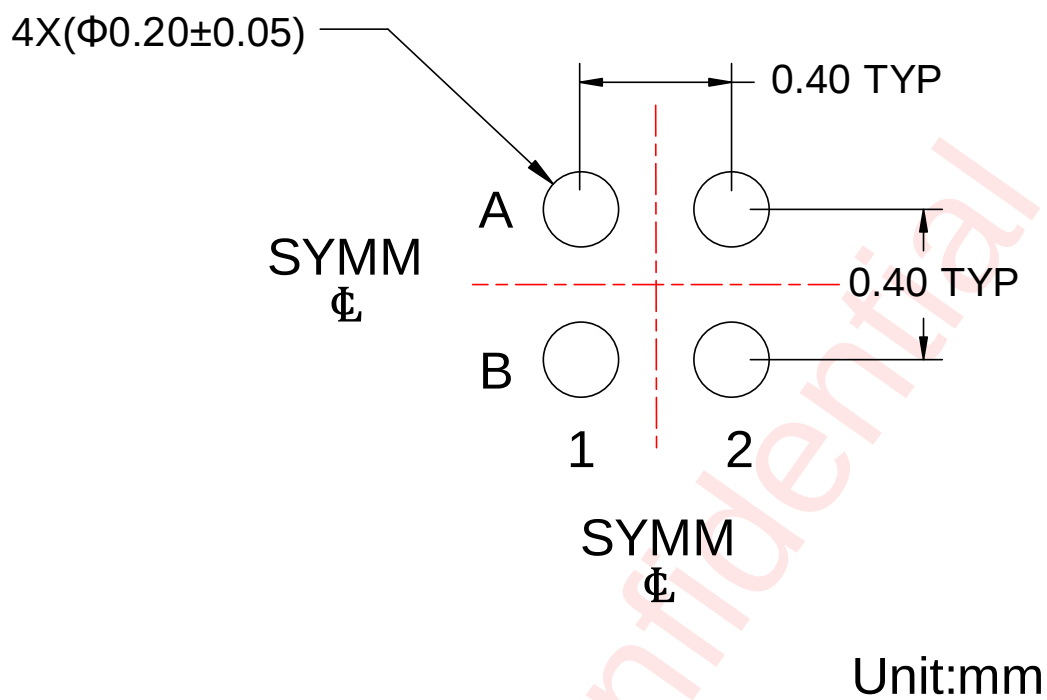

Revision History

Version	Date	Change Record
V1.0	Jun. 2025	Officially released
V1.1	Dec. 2025	Add the A2 pin description

Disclaimer

All trademarks are the property of their respective owners. Information in this document is believed to be accurate and reliable. However, Shanghai AWINIC Technology Co., Ltd (AWINIC Technology) does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

AWINIC Technology reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. Customers shall obtain the latest relevant information before placing orders and shall verify that such information is current and complete. This document supersedes and replaces all information supplied prior to the publication hereof.

AWINIC Technology products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an AWINIC Technology product can reasonably be expected to result in personal injury, death or severe property or environmental damage. AWINIC Technology accepts no liability for inclusion and/or use of AWINIC Technology products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications that are described herein for any of these products are for illustrative purposes only. AWINIC Technology makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

All products are sold subject to the general terms and conditions of commercial sale supplied at the time of order acknowledgement.

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Reproduction of AWINIC information in AWINIC data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. AWINIC is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of AWINIC components or services with statements different from or beyond the parameters stated by AWINIC for that component or service voids all express and any implied warranties for the associated AWINIC component or service and is an unfair and deceptive business practice. AWINIC is not responsible or liable for any such statements.