

Pitch: 2.54x2.54mm (0.1"x0.1")

Female Header Dual Rows Straight Type Four-point Contacts

ELETE
—Professional Connecting Solution—
HFNDS11 Series


Specifications

Current Rating: 3.0 Ampere
Insulation Resistance: 1000M Ω Min
Dielectric Withstanding: 600V AC
Contact Resistance: 20m Ω Max
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

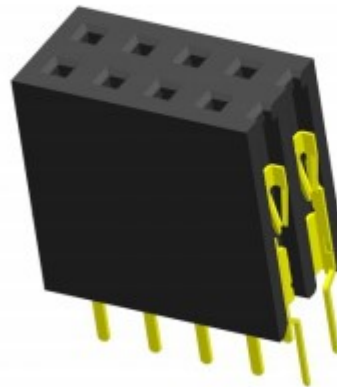

Mating with



HMNDSH25



HMNDS25



HMNDS43




HMNDS74




HMNDM43



HMNDM25



HMNDP61/HMNDP50



HMNDR43



HMNDR25

