

1





2

3

4

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树

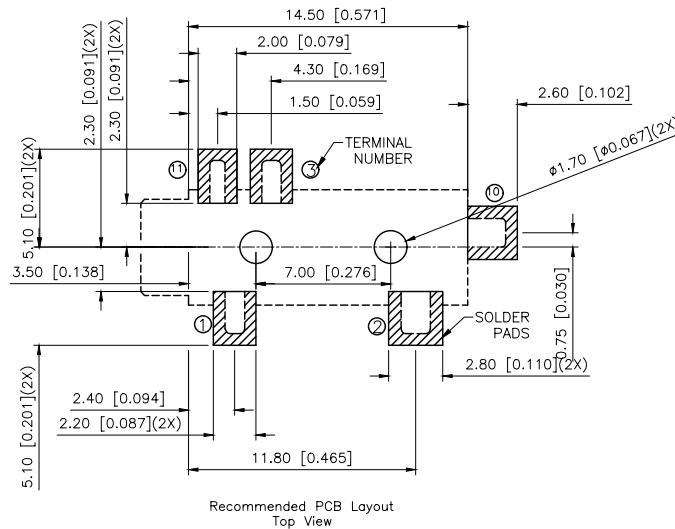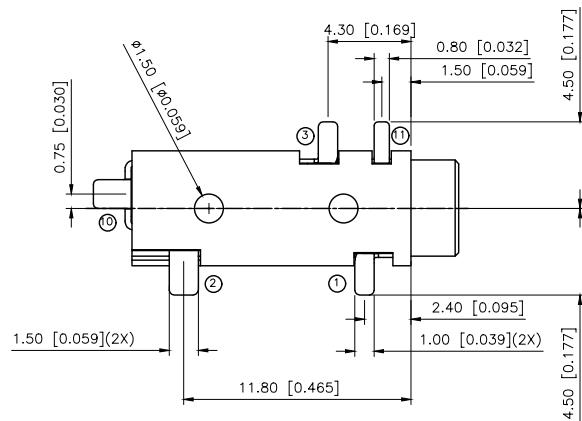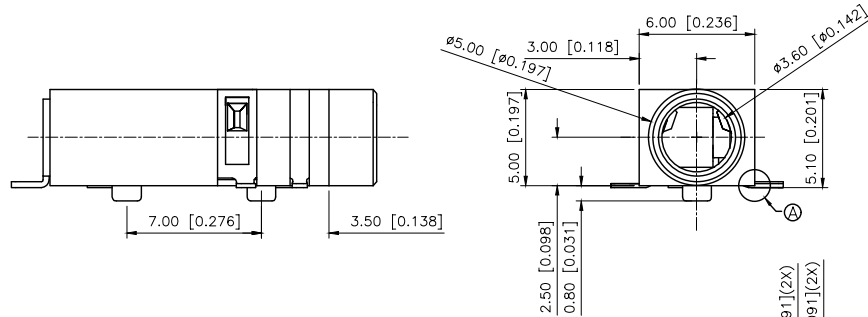

Model No.	PJ-3280-X-SMT	PJ-3281-X-SMT	PJ-3282-X-SMT	PJ-3283-X-SMT	PJ-3284-X-SMT
Schematic					
PIN					
1	sleeve	sleeve	sleeve	sleeve	sleeve
2	tip	tip	tip	tip	tip
3	ring	ring	ring	ring	ring
10	tip switch	tip switch	NP	NP	NP
11	ring switch	NP	NP	tip switch	tip switch

Plastic	High Temp. Thermoplastic	
Terminal 11	Brass	tin
Terminal 10	Brass	tin
Terminal 3	Phosphor Bronze	tin
Terminal 2	Phosphor Bronze	tin
Terminal 1	Phosphor Bronze	tin
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-3280-B-SMT
APPROVED		SIZE: A4	DWG NO.: X-PJ-3280-B-SMT
			SCALE N/A
			PAGE 1/1
			REVISION A1

1

2

3

4