

1

2

3

4

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.10	阿树

PART NO.:

X05 26 W I Z W 5
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Row No-Pin No: 26Pin
③Welding Board Angle:W-Male
④T:Tradutlional C:Car-pin
⑤Planting Category:
1:1u 2:2u 3:3u 4:5u 5:15u 6:30u 7:AuSn
⑥Color:B-Black W-White BL-Blue
⑦1:TYPE-1; 2:TYPE-2; 5:TYPE-5; 7:TYPE-7

Specifications:

规格:

1.Voltage rating:250VAC/DC

额定电压: 250V AC/DC

2.Current rating:3A AC/DC

额定电流: 3A AC/DC

3.Withstanding voltage:500V AC/minute

耐受电压: ≥500V AC/分钟

4.Temperature range: -55℃-+105℃

温度范围: -55℃-+105℃

5.Insulation resistance:1000MΩMIN

绝缘电阻: ≥1000MΩ

6.Contact resistance:30mΩMax

接触电阻: ≥30mΩ

Material:

材料:




7.Rubber core:PBT UL94V-0

胶芯: PBT UL94V-0

8.The iron shell:SPCC Nivkel Plating/Tin Plating/Gold Plating

铁壳: SPCC,镀镍/镀锡/镀金

B、成品不能有弯针, R角不一致等不良。

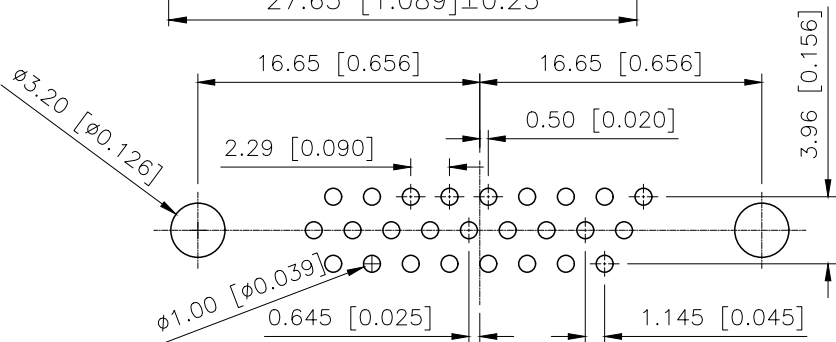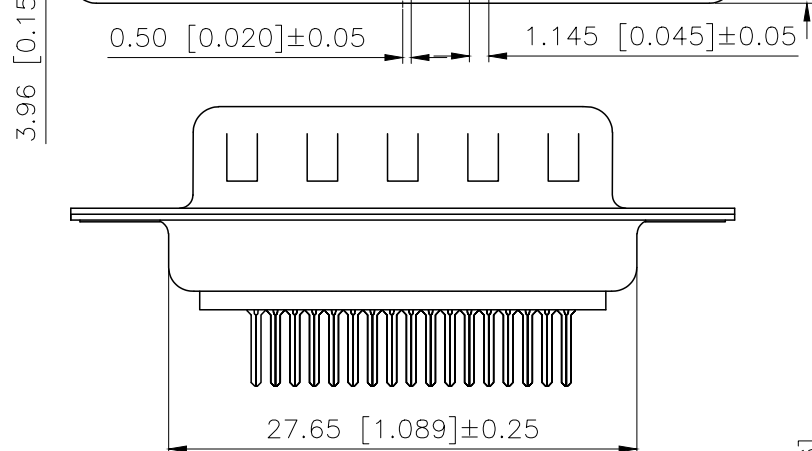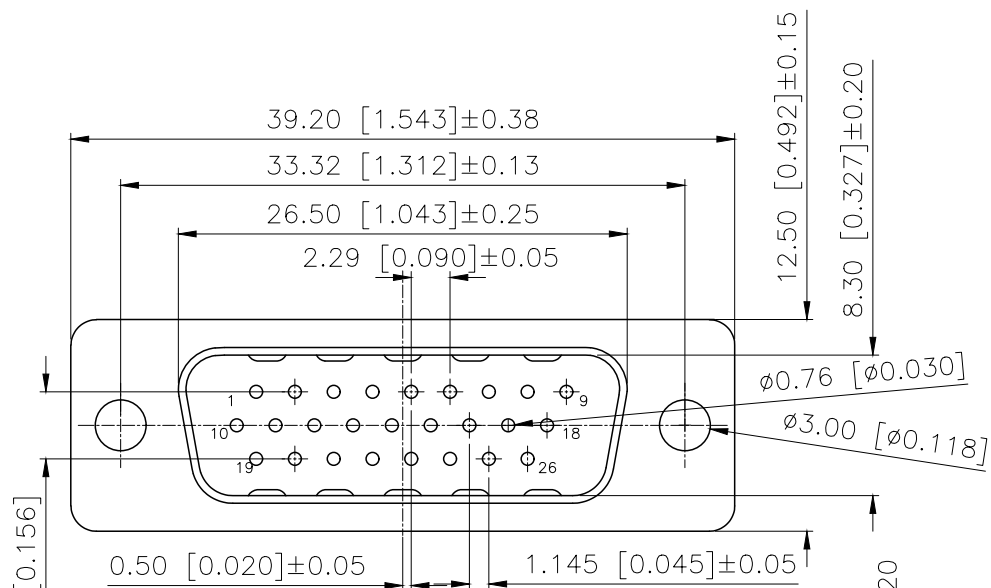

PCB LAYOUT

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	D-SUB
CHECKED		UNIT:	mm/in	PART NO.:	X0526WT7W5
APPROVED		SIZE:	A4	DWG NO.:	X-X0526WT7W5