
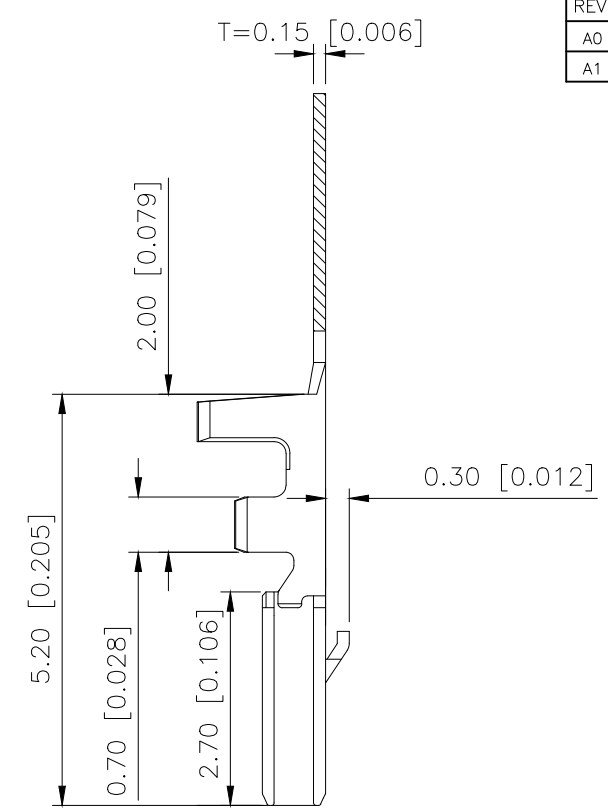


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.28	阿树

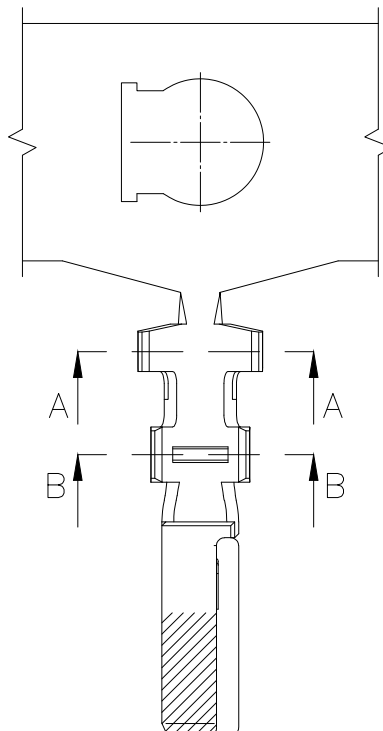


Specifications(规格):
 Voltage rating(额定电压):500V AC/DC
 Current rating(额定电流):2A AC/DC
 Withstanding voltage(耐压值):1500V AC/minute
 Temperature range(工作温度):-40℃~+85℃
 Insulation resistance(绝缘电阻)::1000MΩ
 Contact resistance(接触电阻):<30mΩ
 After environmental testing(环境测试后):≤40mΩ


PART NO.:

X3700 T-P SN
 ① ② ③ ④


- ①Series Number.
- ②Category: T-terminal
- ③Material: P-Phosphor Broze
- ④Plating Category:SN-Bright Tin Plating

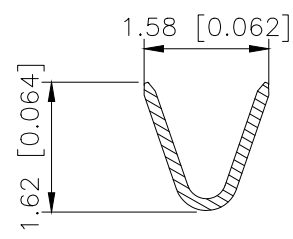

SECTION:A-A
SCALE:1:1

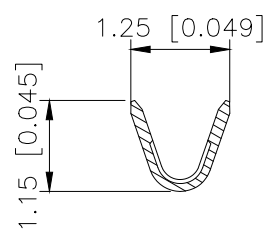

SECTION:B-B
SCALE:1:1

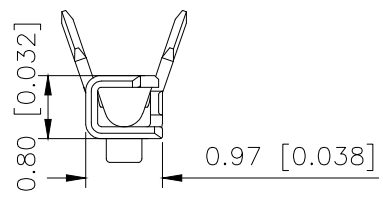

X3700T-PSN	Phosphor Bronze	AWG#26-28	1.07mm(Max)	Stamping Befre Plating:30u"Ni; 70u"Sn	X3700H
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	3.70mm BTB Style Connectors
PART NO.:	X3700T-PSN
DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1