
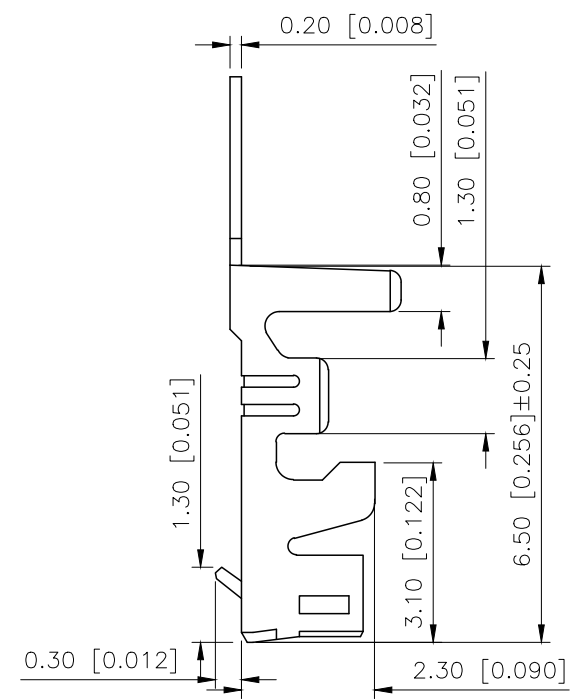


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.10	阿树



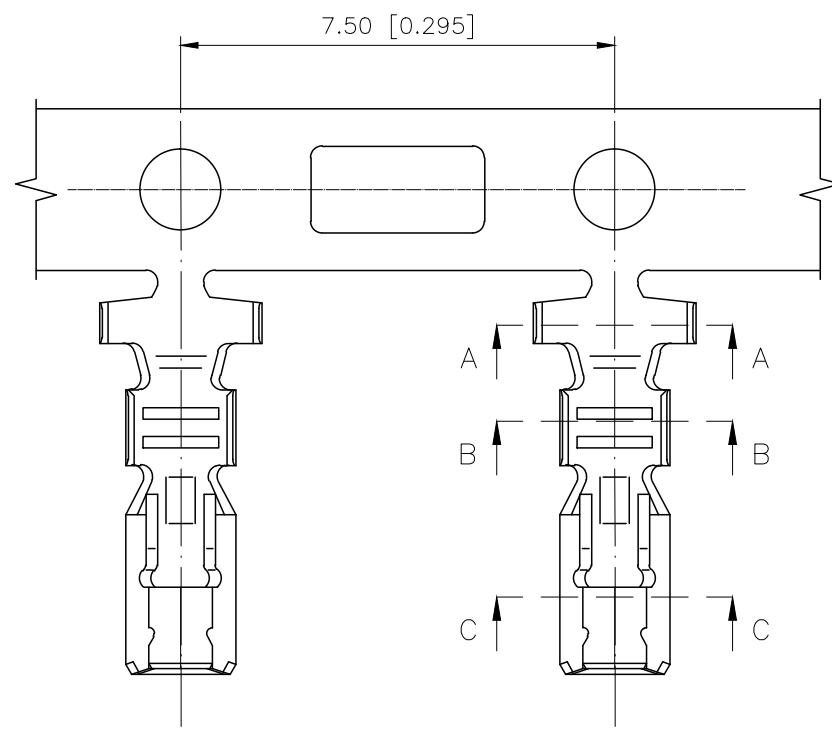


Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-40℃--+125℃
温度范围: -40℃--+125℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:20mΩ Max
接触电阻: 20mΩ Max

PART NO.:

X2513 I-P SN-A
① ② ③ ④ ⑤

- ①Series Number.
- ②Category: T-terminal
- ③Material :P-Phosphor Bronze
- ④Plating:SN-Tin Plated
- ⑤Special No.

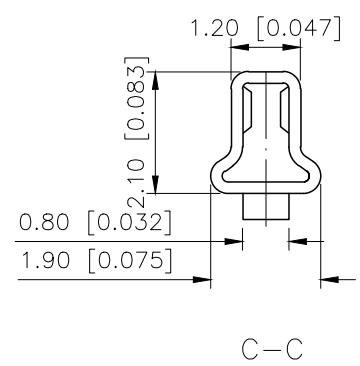

X2508T-PSN-A	Phosphoric bronze	AWG#22~28	X2508H-A
PART NO	Material	Wrie Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.50mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2508T-PSN-A
APPROVED		SIZE: A4	DWG NO.: