



115.111.129.98KHLinear-Kugellager

Linear ball bearings KH16 (Series KH)

with preservative, not sealed, with relubrication facility

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (https://www.schaeffler.de/content.schaeffler.de/en/news_media/index.jsp) or by telephone on +49 (91 32) 82 - 28 97.

Fw	16 mm	
D	24 mm	
L	30 mm	
		Shaft diameter dLw, Fase x dLw ≤ 10: x = 1 tolerance +1 10 < dLw ≤ 30: x = 1,5 tolerance +1 30 < dLw ≤ 80: x = 2,5 tolerance +1
JL4	7 mm	
N2	2,5 mm	
		Supplied coated with a preservative
m	27,5 g	Mass of bearing The basic load ratings are valid only for hardened (650 HV + 165 HV) and ground shaft raceways.
Cmin	890 N	Basic dynamic load rating
C0min	620 N	Basic static load rating
Cmax	1060 N	Basic dynamic load rating
C0max	910 N	Basic static load rating
		Designs with anti-corrosion protection have the suffix -RR.

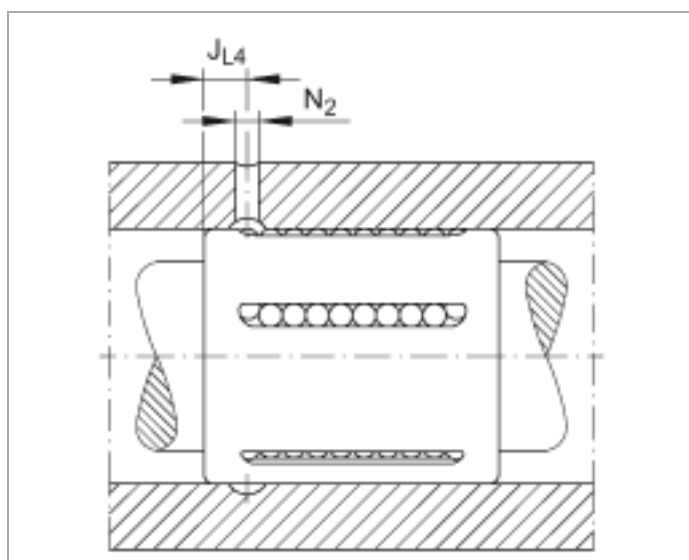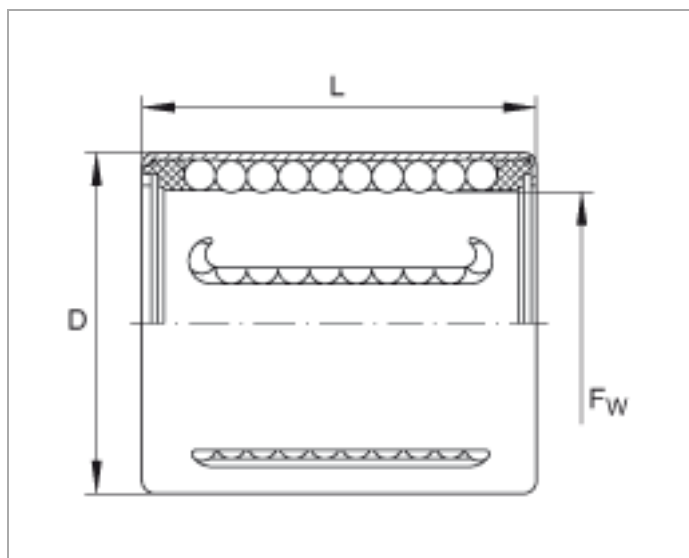

Mounting dimensions