

1

2

3

4

A

A

B

B

C

C

D

D

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.23	阿树

SPEAFICATIONS

1.ELECTRICAL

Con tact rating	0.1A,30VDC
Con tact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec

2.MECHANICAL AND ENVIRONMENTAL

●Temperature ratong	Operating -15℃ to +55℃ storage.-25℃to +65℃
● Operation	250±50gf
● Stroke	Lock Stroke .1.5±0.2mm Full stroke,2.0±0.2mm
● Operating life	Full load:1x10 ⁴ cycles N0 load:1x10 ⁵ cycles
● Con tact form	DPDT



CIRCUIT DIAGRAM


FEATURES

Light operating force
Long term low con tact resistance
Momentary or lating operation
Short stroke 1.5mm to latch

PAPT NO	XKB5858-W-F
OPERATION	W:NO LOCK Z:LOCK

7	Contact	2	Phosphor Bronze	Plating silvering
6	Terminal	6	Brass	Plating silvering
5	Spring	1	Sus	Natural
4	Base	1	PPA	
3	Crochet Needle	1	Sus	Natural
2	Cover	1	PPA	
1	Keystake	1	PPA	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

DESIGN	阿树	VIEW:	MODEL TYPE: KEY SWITCH
CHECKED		UNIT: mm/in	PART NO.: XKB5858-W-F
APPROVED		SIZE: A4	DWG NO.: X-XKB5858-W-F
SCALE		PAGE	REVISION
		1/1	A1

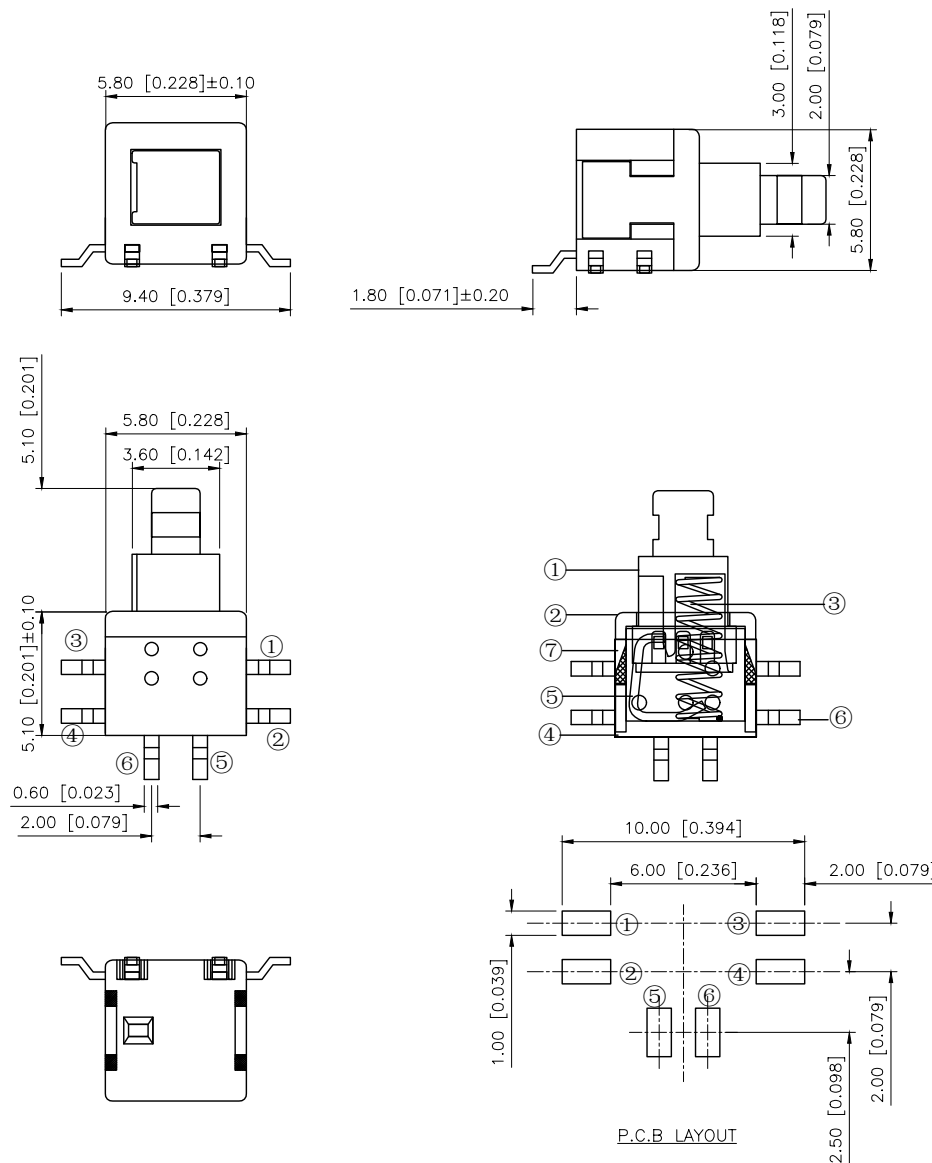

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

