

无源晶振-DIP-2*6,3*8 Crystal KHZ



●特征Features :

- Package Size : 2.0*6.0, 3.0*8.0
- Frequency Range: 32.768KHz
- High precision and high frequency stability.
- Ultra-small plug-in tuning fork crystal.


●应用领域Applications:

- Mobile communication devices, wearables, clocks, meters, instruments, etc

●电气规格Electrical Specifications

类型/尺寸Type/Size	2*6	3*8
频率范围Frequency Range	32.768KHz	
负载电容Load Capacitance	6 pF, 7 pF, 9pF, 12.5pF	
频率偏差Frequency tolerance at 25°C	±5ppm, ±10ppm, ±20ppm, or specify	
频率温度系数Parabolic coefficient	±0.04×10 ⁻⁶ /°C ²	
等效串联电阻Equivalent series resistance	40KΩ max.	
工作温度Operating Temperature	-20~+70°C, -40~+85°C, or specify	
激励电平Drive Leve	0.5μW max.	
静态电容Shunt capacitance (C0)	3pF or specify	
储存温度Storage Temperature	-55~+125°C	
老化率Aging at 25°C	+3 ppm/year or specify	

●尺寸Package Dimensions (Unit: mm)

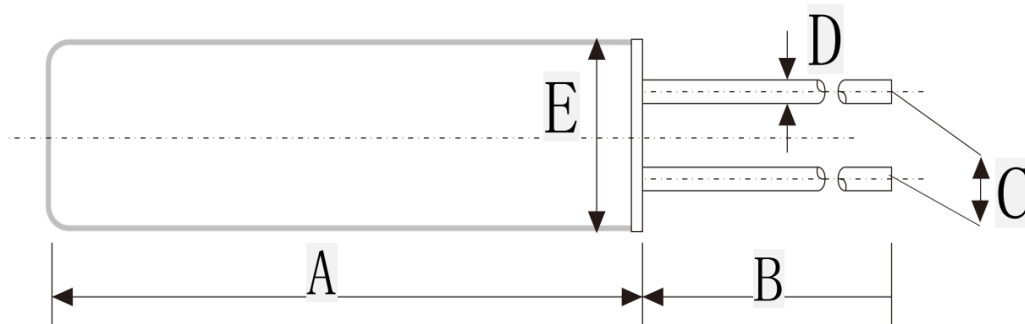

型号	A	B	C	D	E
2*6	6.0 ± 0.2	10.0 ± 0.5	0.7 ± 0.2	0.2 ± 0.05	2.0 ± 0.08
3*8	8.0 ± 0.2	10.0 ± 0.5	1.1 ± 0.2	0.2 ± 0.05	3.0 ± 0.08