

1

2

3

4

A

B

C

D



A

B

C

D

| REVISIONS |         |          |                 |            |        |
|-----------|---------|----------|-----------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION     | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE | /          | /      |
| A1        | N/A     |          | 图面升级整理图面        | 2025.05.22 | 阿树     |

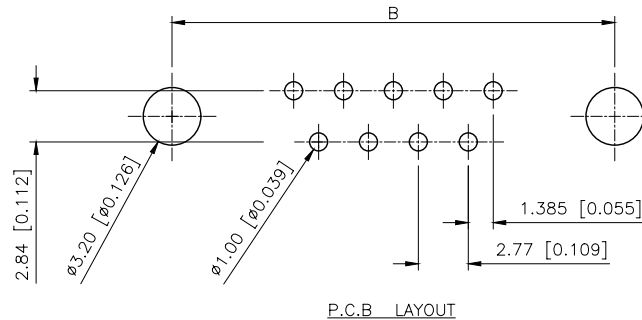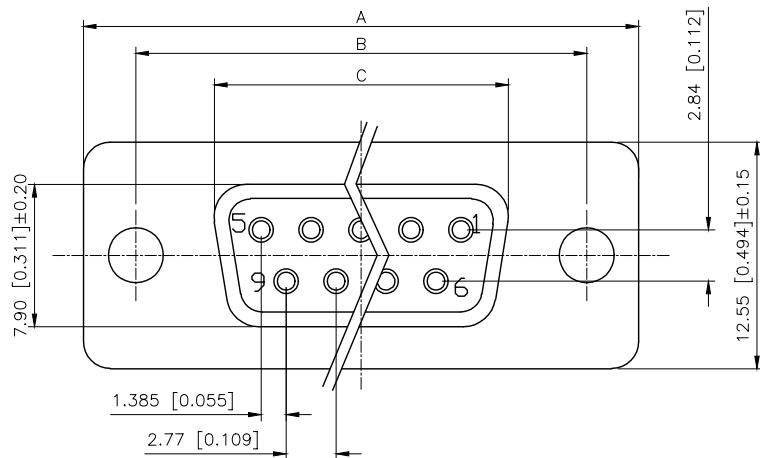

PART NO.:

X02 25 F I 17 B 5  
① ② ③ ④ ⑤ ⑥ ⑦



- ①Series NO.  
②Row No.Pin No.XX-09;15;25;37  
③Welding Board Angle :F-Female  
④T: Tradutional C: Car-pin  
⑤Planting Category: 1:1U' 2:2U' 3:3U' 4:5U'  
5:15U' 6:30U' 7:50U'  
⑥Color:B-BLACK W-White BL-Blue  
⑦1:TYPE-1; 2:TYPE-2; 5:TYPE-5; 7:TYPE-7

## Specifications:

## 规格:

- Voltage rating:250VAC/DC  
额定电压: 250V AC/DC
  - Current rating:1A AC/DC  
额定电流: 1A AC/DC
  - Withstanding voltage:500V AC/minute  
耐受电压: ≥500V AC/分钟
  - Temperature range: -55℃~+105℃  
温度范围: -55℃~+105℃
  - Insulation resistance:1000MΩMIN  
绝缘电阻: ≥1000MΩ
  - Contact resistance:30mΩMax  
接触电阻: ≥30mΩ
- Material:  
材料:  
7.Rubber core:PBT UL94V-0  
胶芯: PBT UL94V-0  
8.The iron shell:SPCC Nivkel Plating/Tin Plating/Gold Plating  
铁壳: SPCC,镀锌/镀锡/镀金  
B. 成品不能有弯针, R角不一致等不良。

| NUMBER OF POSITIONS | DIMENSION |        |        |        |
|---------------------|-----------|--------|--------|--------|
|                     | A±0.25    | B±0.13 | C±0.38 | D±0.25 |
| 9                   | 30.80     | 24.99  | 16.35  | 19.28  |
| 15                  | 39.20     | 33.32  | 24.75  | 27.51  |
| 25                  | 53.05     | 47.04  | 38.35  | 41.28  |
| 37                  | 69.40     | 63.50  | 54.75  | 57.71  |

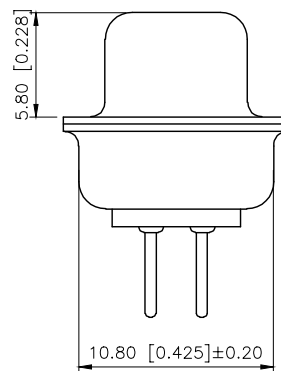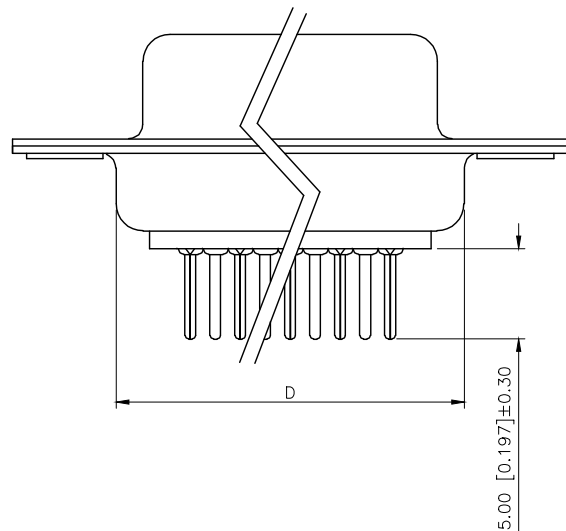

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



| 铆合方式      | TYPE-1: 铆合 | TYPE-2: 前铆实心螺母 | TYPE-7: 后铆鱼叉           | TYPE-5: 铆鱼叉锁螺丝 |
|-----------|------------|----------------|------------------------|----------------|
| 图示        |            |                |                        |                |
| DESIGN    | 阿树         | VIEW:          | MODEL TYPE: D-SUB      |                |
| CHECKED   |            | UNIT: mm/in    | PART NO.: X0225FT17B5  |                |
| APPROVED  |            | SIZE: A4       | DWG NO.: X-X0225FT17B5 |                |
| SCALE N/A |            | PAGE 1/1       | REVISION A1            |                |

1

2

3

4